MAX767 Evaluation Kit

MAX767 EV Kit

General Description

The MAX767 evaluation kit (EV kit) is a fully assembled and tested printed circuit board for Maxim's synchronous, step-down power-supply controller. Providing a tightly regulated 3.3V output voltage from a 5V input source, the EV kit contains two separate, complete circuits with conversion efficiencies greater than 90%. The first all-surface-mount circuit can drive loads up to 1.5A, and the second circuit can drive loads up to 5A.

Features

- **Fixed 3.3V Output Voltage ±4%**
- **Up to 1.5A and 5A Output Currents**
- **120µA Standby Supply Current**
- **700µA Quiescent Supply Current**
- **300kHz Switching Frequency**
- **More than 90% Efficiency**
- **20-Pin Shrink-Small-Outline Package**
- **Fully Assembled and Tested**

Ordering Information

PART	TEMP. RANGE	BOARD TYPE
MAX767EVKIT-SO	0°C to +70°C	Surface Mount

EV Kit

Call toll free 1-800-998-8800 for free samples or literature.

MAX767 Evaluation Kit

Component List

DESIGNATION	QTY	DESCRIPTION
C101	1	47µF, 16V low-ESR tantalum capacitor AVX TPSD476K016R0150
C106, C206	2	0.22µF ceramic capacitors Murata-Erie GRM42-6X7R224K050
C103, C203	2	0.1µF ceramic capacitors
C201, C202, C207	3	220µF, 10V low-ESR aluminum electrolytic capacitors Sanyo OS-CON 10SA220M
C102	1	220µF, 6.3V low-ESR tantalum capacitor Sprague 595D227X06R3D2B
C105, C205	2	0.01µF ceramic capacitors
C104, C204	2	4.7µF, 16V tantalum capacitors Sprague 595D475X0016A2B
D102	1	1A, 20V Schottky (1N5817) NIEC EC10QS02 Motorola MBRS120T3
D202	1	3A, 20V Schottky (1N5820) NIEC NSQ03A02 Motorola MBRS340T3
D101, D201	2	SOT-23 diodes Central Semiconductor CMPSH-3
L101	1	10µH, 1.5A inductor Sumida CDR74B-100
L201	1	3.3µH, 5A inductor CoilCraft DO3316-332
N101	1	N-channel MOSFET (SO-8) Motorola MMDF3N03HD or Siliconix Si9936DY
N201, N202	2	N-channel MOSFETs (DPAK) Motorola MTD20N03HDL or Harris RFD16N05L
R101	1	0.040Ω, 1% resistor (SMT) IRC LR2010-01-R040-F DD WSL-2010-R040F
R102, R202	2	10Ω resistors
R201 (2 options)	1	0.012Ω, 1% resistor (SMT) DD WSL-2512-R012F
	2	0.025Ω, 1% resistor (SMT) IRC LR2010-01-R025-F
U1, U2	2	MAX767CAP ICs
JU101, JU201	2	3-pin header
None	2	Shunt
None	1	PC board
None	1	MAX767 data sheet

Component Suppliers

SUPPLIER	PHONE	FAX
AVX	(207) 282-5111 (800) 282-4975	(207) 283-1941
Central Semiconductor	(516) 435-1110	(516) 435-1824
CoilCraft	(708) 639-6400	(708) 639-1469
Coiltronics	(407) 241-7876	(407) 241-9339
DD	(402) 564-3131	(402) 563-1841
Harris	(407) 724-3739 (800) 442-7747	(407) 724-3937
IRC	(512) 992-7900	(512) 992-3377
Motorola	(602) 244-3576	(602) 244-4015
Murata-Erie	(800) 831-9172 (814) 237-1431	(404) 684-1541
NIEC (QMI*)	(805) 867-2555	(805) 867-2556
Sanyo USA	(619) 661-6835	(619) 661-1055
Siliconix	(408) 988-8000	(408) 970-3950
Sprague	(603) 224-1961	(603) 224-1430
Sumida	(708) 956-0666	(708) 956-0702

* Distributor

Operating Procedure

The MAX767 EV kit is a fully assembled and tested board. The following procedure verifies board operation for both 1.5A and 5A configurations.

Do not turn on the power supply until all connections are completed.

1. Connect a 5V supply to the pad marked VIN. The ground connects to the GND pad.
2. Connect a voltmeter and load (if any) to the VOUT pad.
3. Place the shunt on JU101 and JU201 across pins 2 and 3 for normal operation.
4. Turn on the power and verify that the output voltage is 3.3V.

Table 1. Jumper JU101/JU201 Functions

JUMPER	CONNECTION	FUNCTION
JU101/ JU201	1 & 2	Output disabled; V_{OUT} = 0V
	2 & 3	Output enabled; V_{OUT} = 3.3V
	OPEN	Output enabled if pin 3 (ON) is connected to VCC; disabled if ON is connected to GND.

Jumper Selection

The 3-pin header JU101/JU201 selects shutdown mode. Table 1 lists the selectable jumper options.

Output Noise

MAX767 output noise is typically less than 50mV peak-to-peak. Small erroneous voltage spikes seen when the MOSFETs switch are the result of improper oscilloscope-probe grounding. EMI radiated from the circuit is picked up by the loop from the probe tip to the probe ground. Ground noise may also cause a measurement error due to the voltage difference from the output capacitor ground lead to the probe ground connection.

To reduce or eliminate these errors, use the oscilloscope-probe grounding technique shown in Figure 1. The probe is placed directly across the output capacitor, with its ground ring contacting the ground lead of the output capacitor. The normal probe ground lead is not connected to the circuit.

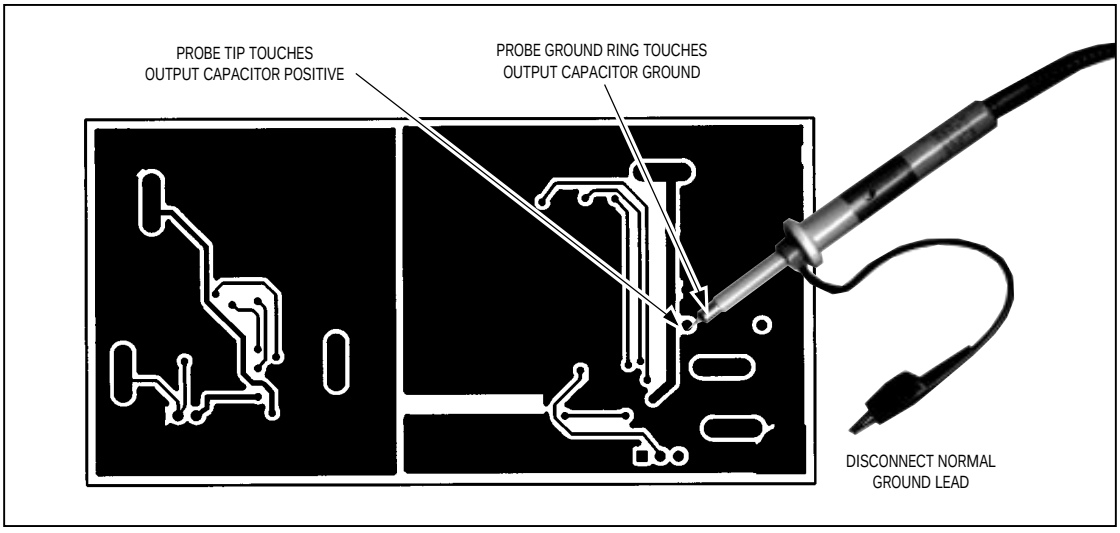

Figure 1. Noise Measurement

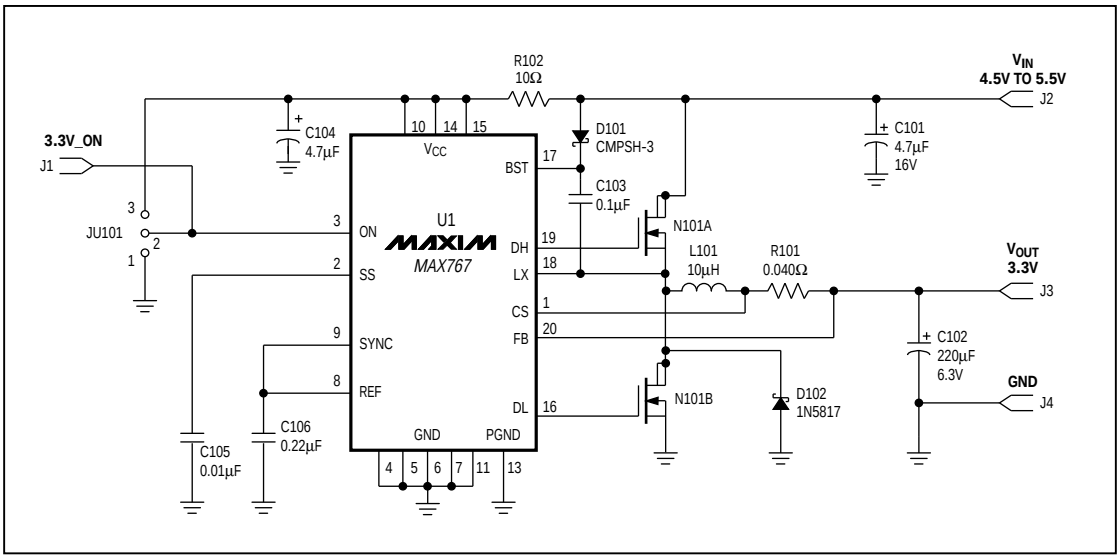

Figure 2. MAX767 1.5A Circuit

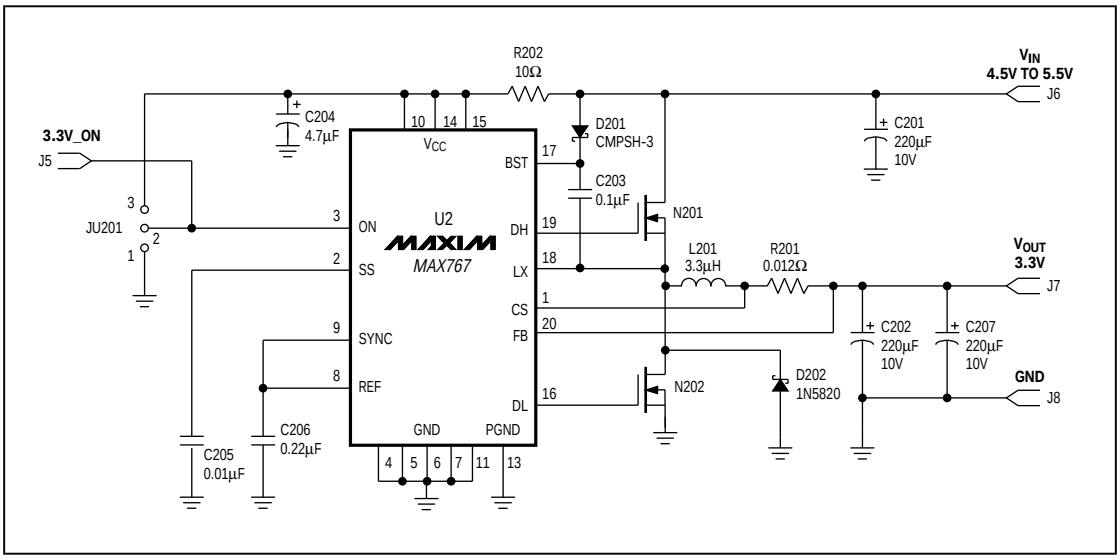

Figure 3. MAX767 5A Circuit

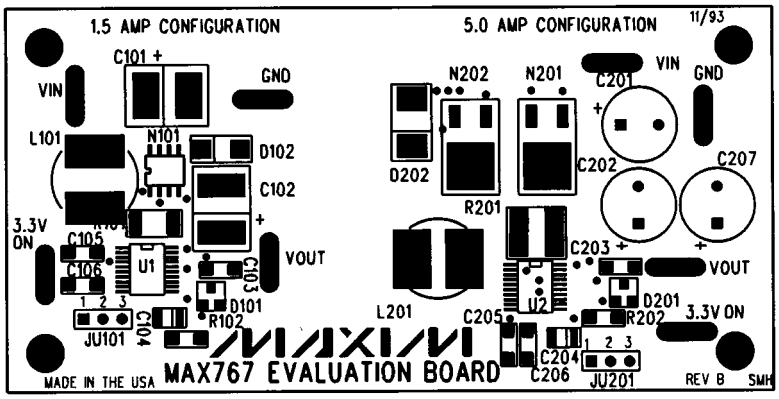

Figure 4. MAX767 EV Kit Component Placement Guide (Component Side)

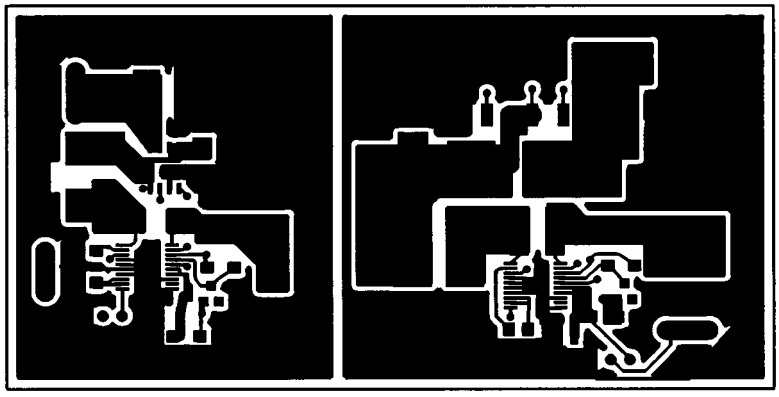

Figure 5. MAX767 EV Kit PC Layout (Component Side)

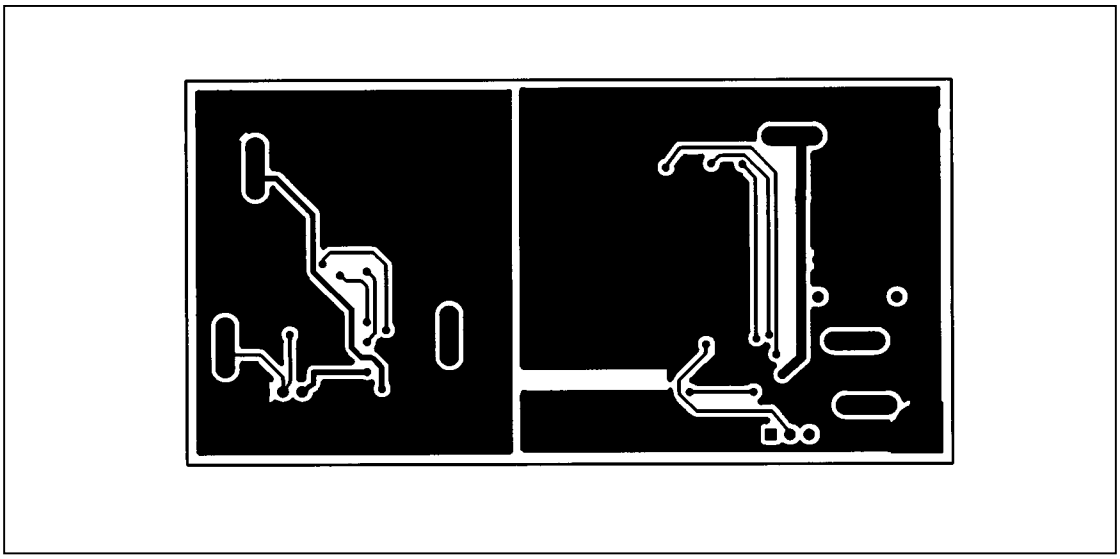

Figure 6. MAX767 EV Kit PC Layout (Solder Side, Top View)

1994 EVALUATION KIT DATA BOOK FAXBACK OFFER



Accelerate your time to market with Maxim's evaluation kits (EV kits) that simplify design-in and prototyping. For your convenience, the *1994 Evaluation Kit Data Book* includes EV kit manuals and corresponding data sheets covering 95 products in one easy-to-use book. To receive your free data book, simply FAX this response card to your nearest Maxim office, or call toll-free 1-800-998-8800 (in the US only) for prompt fulfillment. We look forward to serving you.

FAX NUMBERS:

US	(408) 737-7194	**Italy**	(02) 99041981	**Japan**	(03) 3232-6149
UK	(01734) 305577	**France**	(1) 30 64 73 48	**Taiwan**	(35) 777659
Germany (Maxim GmbH)	(089) 8544239				

My application is: __| __| __| __| __| __| __| __| __| __| __| __| __| __| __| __| __| __| __| __| __| __| __| __| __| __|

My end product is: __| __| __| __| __| __| __| __| __| __| __| __| __| __| __| __| __| __| __| __| __| __| __| __| __| __|

Name _____ Title _____

Company _____

Address _____

City _____ State _____ Zip _____ Phone# _____

MAX767 EV DS REV 2

MAX767 Evaluation Kit

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

© 1995 Maxim Integrated Products Printed USA MAXIM is a registered trademark of Maxim Integrated Products.