



PROTECTOR FOR PUSHBUTTON POTENTIOMETER

■ For use with Model 3680 digital pushbutton precision potentiometer

BOURNS

Model H-385 Panel Seal Assembly

Physical Characteristics


Material (Boot)	Clear silicone rubber
Material (Frame)	Rigid black plastic
Expected Life	100,000 actuations minimum
Weight	
H-385-1	Approximately 0.25 oz.
H-385-2	Approximately 0.30 oz.
H-385-3	Approximately 0.35 oz.
H-385-4	Approximately 0.40 oz.
H-385-5	Approximately 0.45 oz.

APPLICATION DATA

- Protects front of the pot from unwanted entry of rain, dust, grease or oils
- Transparent for easy viewing of numerals
- Tear resistant for long life
- Matte finish black plastic frame to complement most front panels


Bourns® Model H-385 Panel Seal Assembly minimizes accidental entry of liquids or foreign matter through the front of the Model 3680 Family Potentiometer.

PANEL CUT-OUT/HOLE DIMENSIONS

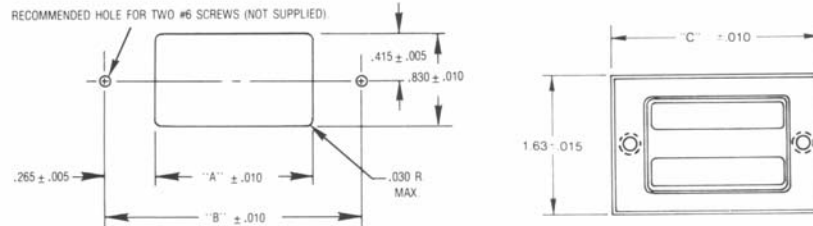

H-385 MOUNTING INSTRUCTIONS

1. Cut out and drill panel ¹ per chart.
2. Install snap-in potentiometer ².
3. Locate silicone boot ³ and frame ⁴ over potentiometer and holes.
4. Attach panel seal assembly to panel with two #6 screws (not supplied).

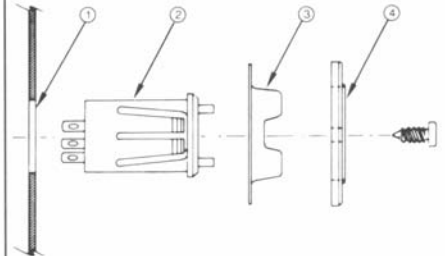

For Use With	Part Number	Frame Dimensions "C"	Panel Cutout/ Hole Dimensions	
			"A"	"B"
3681	H-385-1	1.592	.620	1.150
3682	H-385-2	1.992	1.020	1.550
3683	H-385-3	2.392	1.420	1.950
3684	H-385-4	2.792	1.820	2.350
3685	H-385-5	3.192	2.220	2.750