

Standard Potentiometer

Series P 4500





Special features

- industry standard size offering top performance at reasonable cost
- very long life - 100×10^6 shaft revolutions at 1500 rpm
- very good independent linearity - standard $\pm 0.075 \%$
- very high resolution - better than 0.008°
- high admissible operating speed - $10\,000 \text{ min}^{-1}$
- unrestricted continuous rotation

Precision potentiometer with conductive plastic resistance track.
For measuring, control and instrumentation applications.

The distinguishing features of the P 4500 include an all metal case, ball bearings, conductive-plastic collector track and elastomer-damped wiper for both resistance and collector tracks.
Because of its reliability, long life, good linearity, high resolution, high operational speed and corrosion resistance, this component opens applications hitherto closed to conventional potentiometers. Special versions with different electrical travels and shaft dimensions are available.

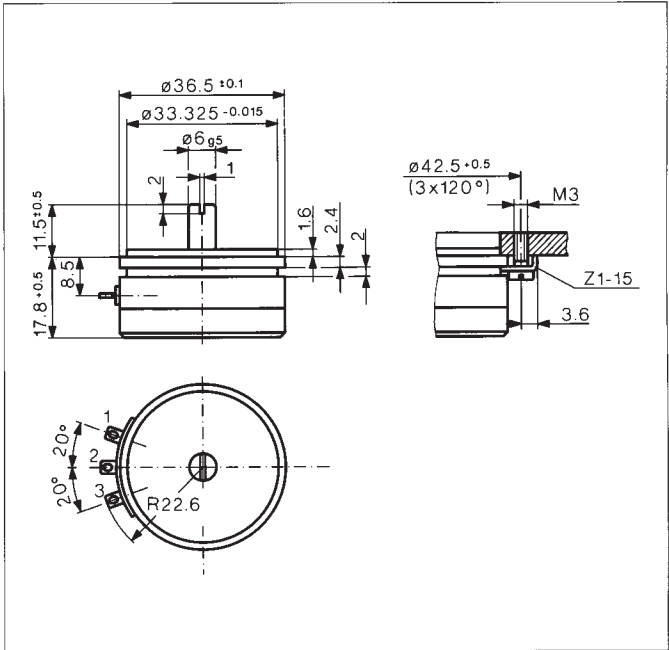

Description	
Size	Servo size 13
Case	two part, anodized aluminium case and cover
Shaft	stainless steel
Bearings	stainless steel ball bearings
Resistance element	conductive plastic
Wiper assembly	precious metal multi-finger wipers
Electrical connections	gold-plated brass terminals

Mechanical Data		
Dimensions	see drawing	
Mounting	with 3 clamps Z 1 - 15	
Mechanical travel	360, continuous	°
Permitted shaft loading (axial and radial) static or dynamic force	45	N
Torque	≤0,1	Ncm
Maximum operational speed	10 000	min ⁻¹
Weight	45	g
Electrical Data		
Actual electrical travel	350 ±2	°
Available resistance values	1; 2; 5	kΩ
Resistance tolerance	±20	%
Repeatability	0.002 (± 0.007°)	%
Effective temperature coefficient of the output-to-applied voltage ratio	typical 5	ppm/°C
Independent linearity	±0.075	%
Max. permissible applied voltage	42	V
Recommended operating wiper current	<1	μA
Max. wiper current in case of malfunction	10	mA
Insulation resistance (500 VDC, 1 bar, 2 s)	≥10	MΩ
Dielectric strength (50 Hz, 2 s, 1 bar, 500 VAC)	≤100	μA

Environmental Data		
Temperature range	-40...+100	°C
Vibration	5...2000 A _{max} = 0.75 a _{max} = 20	Hz mm g
Shock	50 11	g ms
Life	100 x 10 ⁶	rev.
Protection class	IP 40 (DIN 400 50 / IEC 529)	

Order designations

Type	Art.no.	R in kΩ
P4501a102	006001	1
P4501a202	006002	2
P4501a502	006003	5

Type designations for non-standard models
will be specified upon receipt of order.

Included in delivery

3 mounting clamps Z 1 - 15

Recommended accessories

Fork coupling Z 104 g 6,
Fork coupling Z 105 g 6
(backlash-free),
Process-controlled indicators
MAP... with display,
Signal conditioner MUP.../
MUK ... for standardized
output signals

Important

All the values given in this data
sheet for linearity, lifetime,
micro-linearity, resistance to
external disturbances and
temperature coefficient in the
voltage dividing mode are
quoted for the device opera-
ting with the wiper voltage
driving on operational amplifier
working as a voltage follower,
where virtually no load is
applied to the wiper
(I_E ≤ 1 μA).