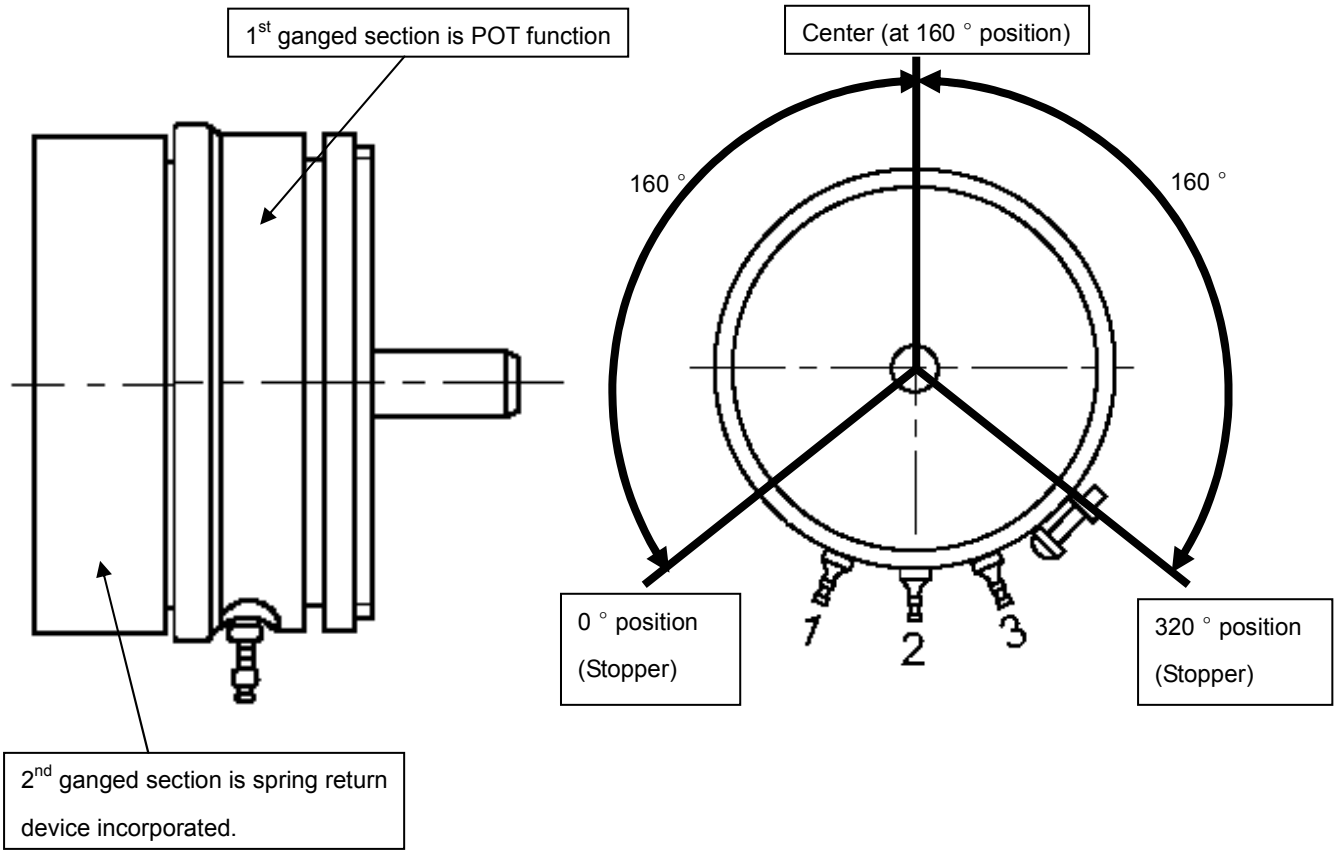
1st ganged section is POT function
Center (at 160 ° position)
160 °
160 °
0 ° position
(Stopper)
1
2
3
320 ° position
(Stopper)
2nd ganged section is spring return
device incorporated.