

Fully Sealed Container Cermet Potentiometers Military and Professional Grade



FEATURES

- 3 Watt at 70°C
- High power rating
- Low temperature coefficient
- Excellent stability
- Full sealing
- Low contact resistance variation
- Mechanical strength
- Use of faston 2.86 connections

ELECTRICAL SPECIFICATIONS		
Resistive Element		cermet
Electrical Travel		270° ± 10°
Resistance Range	Linear Law	22Ω to 10MΩ
	Logarithmic Laws	100Ω to 2.2MΩ
Standard Series E3		1 - 2.2 - 4.7 and on request 1 - 2 - 5
Tolerance	Standard	± 20%
	On Request	± 10% - ± 5%
Power Rating	Linear	3 W at 70°C
	Logarithmic	1.5 W at 70°C
Temperature Coefficient		See Standard Resistance Element Data
Limiting Element Voltage (Linear Law)		300V
Contact Resistance Variation		3% Rn or 3Ω
End Resistance (Typical)		1Ω
Dielectric Strength (RMS)		2500V
Insulation Resistance (500 VDC)		10 ⁶ MΩ

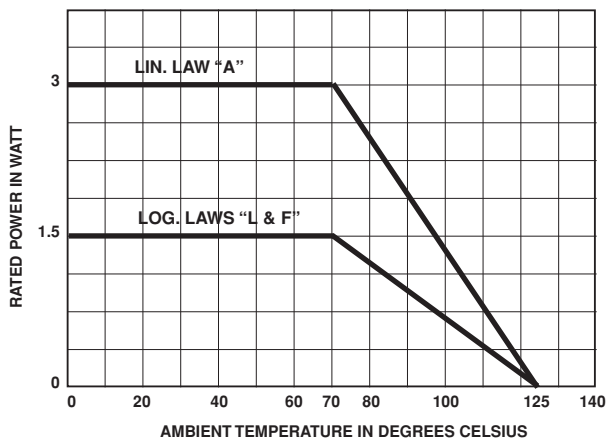
MECHANICAL SPECIFICATIONS

Mechanical Travel	300° ± 5°
Operating Torque (max. Ncm)	3 typical
End Stop Torque (max. Ncm)	70
Max. Tightening Torque Of Mounting Nut (Ncm)	250
Unit Weight (max. g)	23 to 32


ENVIRONMENTAL SPECIFICATIONS

Temperature Range	- 55°C + 125°C
Climatic Category	55/125/56
Sealing	fully sealed container IP67






POWER RATING CHART



RESISTANCE LAWS

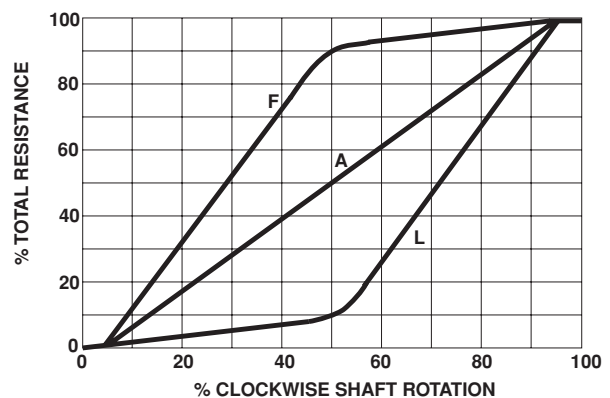

DIMENSIONS in millimeters

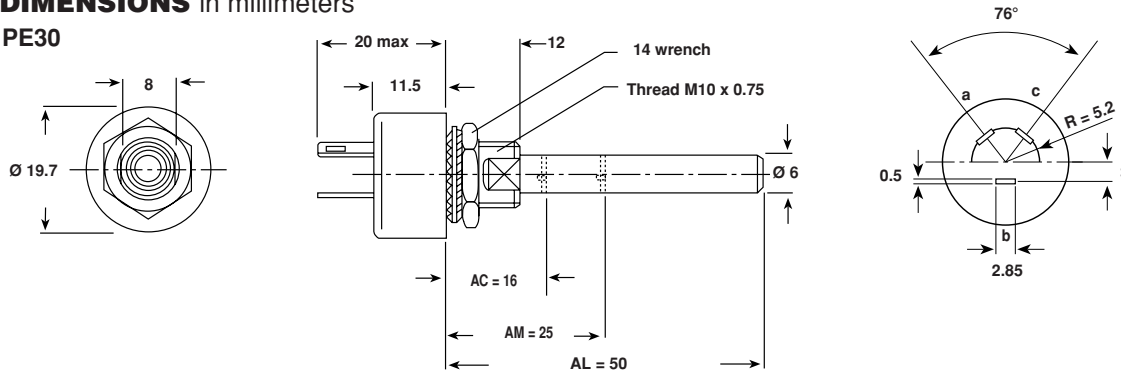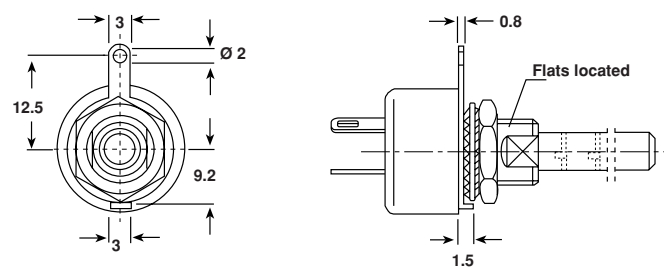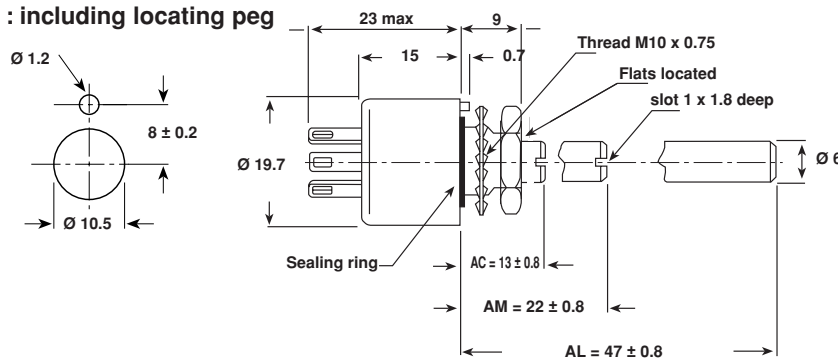PE30

DBAN SHAFT LOCKING

PE30 LPRP - WITH LOCATING PEG

PANEL SEALED VERSION
PE30P - PE30PE
PE : including locating peg

 Tolerance unless otherwise specified ± 0.5
CIRCUIT DIAGRAM

SPECIAL FEATURES
COMMAND SHAFT

Length is measured from the mounting surface to the free end of the shaft. The screwdriver slot is aligned with the wiper within $\pm 10^\circ$. Special shafts are available, in accordance to drawings supplied by customers. We recommend that customers should not machine shafts, in order to avoid damage. Bending or torsion of terminals should also be avoided.

PANEL SEALING : PE30 P

The panel sealing device consists of a ring located in a slot on the potentiometer face. Sealing is obtained by tightening the ring against the panel when mounting the potentiometer.

LINEARITY

The typical linearity of linear variation law potentiometers is $\pm 5\%$. Guaranteed linearity on request. Consult VISHAY.

SHAFT LOCKING : DBAN

The shaft locking device consists of a tapered nut tightening a slotted notched washer against both bushing and shaft. DBAN tightening torque is 200 Ncm, shaft locking torque being 30 Ncm. DBAN is also available with all special types. This device is normally supplied in a separate bag. Can be pre-mounted on request.

LOCATING PEG : LPRP

Location is obtained by fitting a special washer in 2 holes drilled at 180° in the potentiometer face.

PERFORMANCE						
NF C 83-253					TYPICAL VALUES AND DRIFTS	
TESTS	CONDITIONS	$\frac{\Delta RT}{RT}(\%)$	REQUIREMENTS	$\frac{\Delta R_{1-2}}{R_{1-2}}(\%)$	$\frac{\Delta RT}{RT}(\%)$	$\frac{\Delta R_{1-2}}{R_{1-2}}(\%)$
Climatic Sequence	Phase A dry heat 125°C Phase B damp heat Phase C cold -55°C Phase D damp heat 5 cycles	± 10%		± 10%	± 0.5%	± 1%
Long Term Damp Heat	56 days	± 10%	Insulation resist. > 100MΩ		± 0.5%	± 1%
Rotational Life	25000 cycles	± 10%	Contact res. variat.: < 7% Rn		± 3%	Contact res. variat.: < 2% Rn
Load Life	1000 h at rated power 90°/30° - ambient temp. 70°C	± 10%	Contact res. variat.: < 7% Rn		± 1%	Contact res. variat.: < 3% Rn
Rapid Temperature Change	5 cycles - 55°C to + 125°C	± 3%			± 0.5%	
Shock	50 g 11 ms 3 successive shocks in 3 directions	± 2%			± 0.1%	± 0.2 %
Vibration	10 - 55 Hz 0.75mm or 10 g during 6 hours	± 2%			± 0.1%	± 0.2 %

STANDARD RESISTANCE ELEMENT DATA							
STANDARD RESISTANCE VALUES	LINEAR LAW			LOG LAWS			T.C. -55°C +125°C
	MAX. POWER AT +70°C	MAX. WORKING VOLTAGE	MAX. CUR. THROUGH ELEMENT	MAX. POWER AT +70°C	MAX. WORKING VOLTAGE	MAX. CUR. THROUGH ELEMENT	
Ω	W	V	mA	W	V	mA	ppm/°C
22	3	8.12	369				200
47	3	11.87	252				
100	3	17.32	173				±100
220	3	25.69	116				
470	3	37.55	79				
1k	3	54.77	54	1.5	38.7	38.7	
2.2k	3	81.24	37	1.5	57.4	26.1	
4.7k	3	118.74	25	1.5	83.9	17.9	
10k	3	173.20	17	1.5	122	12.2	
22k	3	256.9	11	1.5	181.6	8.25	
47k	1.91	300	6.3	1.5	265	5.64	
100k	0.90	300	3	0.9	300	3	
220k	0.41	300	1.36	0.41	300	1.36	
470k	0.19	300	0.63	0.19	300	0.63	
1M	0.09	300	0.30	0.09	300	0.30	
2.2M	0.04	300	0.13				
4.7M	0.02	300	0.06				
10M	0.01	300	0.03				

MARKING

VISHAY trademark, series, NF types if applicable, ohmic value (in Ω, kΩ, MΩ), tolerance (in %), manufacturing date, marking of terminals 1, 2, 3 or a, b, c.

ORDERING INFORMATION						
SERIES	FEATURE	SHAFT LENGTH	OHMIC VALUE	TOLERANCE	LAW	PACKAGING
PE30	P	AC	200 kΩ	± 20%	A	BO10
	P Panel sealing*	AC 16 ± 0.5mm slotted		± 20% standard	A linear	
	LPRP Locating peg	AM 25 ± 0.5mm slotted		± 10% on request	L clockwise logarithmic	
	DBAN Shaft locking	AL 50 ± 0.5mm plain round			F inverse clockwise logarithmic	

* PE Panel sealing with locating peg (former designation E108)