

# PowerWalker VI 1200 LCD/FR

Line-Interactive UPS System

1200VA Line-Interactive UPS  
1200VA Line-Interactive UPS

2x French + 2x IEC outlets, RJ11/RJ45 Surge Protection


USB Connection for monitoring

Cold start, built-in boost and buck AVR function

LCD display for status view



Item-No. 10121002

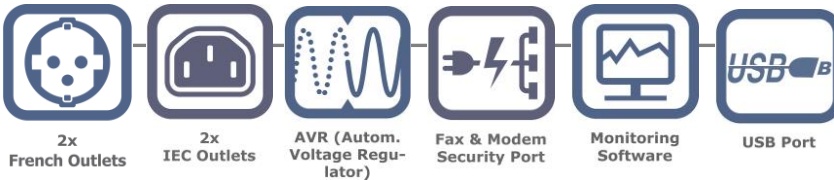

## Product Features

PowerWalker VI 1200 LCD/FR is a Line- Interactive UPS which provides high performance and reliable and cost-effective backup power protection. The UPS can be automatically started up without AC power supplied. In addition, this UPS provides RJ11/RJ45 surge protection. Equipped with a voltage stabilizer, this UPS will continue providing clean and stable power to connected equipment and is perfect for any home or SMB (small medium business) application.


- Super smart charger to shorten charging time
- Built-in boost and buck AVR
- Simulated sine wave
- Auto restart while AC is recovering
- Off-mode charging
- Cold start function
- USB communication port
- RJ11/RJ45 surge protection
- Monitoring software included
- LCD Display show UPS status



Backside view



LCD status view



USB port,  
RJ11/45 surge protection

## Technical Details

### Product Features

<b>Capacity</b>	1200VA/600W
<b>Input Voltage</b>	230 VAC
<b>Input Voltage Range</b>	170-280VAC $\pm$ 7%
<b>Output Voltage</b>	230 VAC
<b>Voltage Regulation (Battery Mode)</b>	$\pm$ 10%
<b>Output Frequency</b>	50Hz or 60Hz
<b>Frequency Regulation (Battery Mode)</b>	$\pm$ 1Hz
<b>Output Waveform</b>	Simulated Sine Wave

### Battery

<b>Type</b>	12V / 7Ah
<b>Quantity</b>	2x
<b>Recharge Time</b>	6h for 90% after complete discharge

### Transfer Time

<b>Typical</b>	4-8 ms
----------------	--------

### LCD Indicators

<b>Indicators</b>	AVR mode, Battery mode, Load level, Battery capacity, Input voltage, Output voltage, Overload alarm, Fault alarm, and Low battery alarm
-------------------	---

### Audio Indicators

<b>Battery Mode</b>	Beep every 10 sec
<b>Low Battery</b>	Beep every second
<b>Fault</b>	Continuous Beep
<b>Overload</b>	Beep every 0.5 sec

### Full Protection

<b>Discharge prevention</b>	Yes
<b>Deep discharger</b>	Yes
<b>Overcharge</b>	Yes
<b>Overload</b>	Yes

### Connections

<b>Interface</b>	USB
<b>Outlets</b>	2x French, 2x IEC
<b>Surge Protection</b>	RJ11/RJ45 (in/out)

### Software & System Requirements

<b>Software</b>	WinPower
<b>Operating System</b>	For details visit: <a href="http://www.powerwalker.com/winpower.html">www.powerwalker.com/winpower.html</a>
<b>Other</b>	1x USB port

### Product Details

<b>Dimensions</b>	365 x 139 x 195 mm
<b>Colour</b>	Black
<b>Weight</b>	8.9 kg
<b>Model Code</b>	VI 1200 LCD/FR

### Environment

<b>Temperature</b>	0°C – 40°C
<b>Humidity</b>	0% - 90% RH (non-condensing)

### Package Content

<b>Package Content</b>	PowerWalker VI 1200 LCD/FR, Input Power Cable, USB cable, Software CD, Manual
------------------------	---

### Logistic Data

<b>Giftbox Language</b>	EN/DE/FR/ES/IT/PT/SV/FI/NO/TR RU/UA/BY/PL/CZ/HR/HU/BG/KZ/RS
<b>Manual Language</b>	EN/DE/FR/PL
<b>Dimension/Giftbox</b>	452 x 230 x 292 mm
<b>Weight/Giftbox</b>	9.4 kg
<b>Pieces/Carton</b>	1 pcs
<b>Pieces/Palette</b>	42 pcs
<b>Item Number</b>	10121002
<b>EAN</b>	4260074976533
<b>Warranty</b>	24 Month (except battery)



Optional Accessory:  
2x Yuasa 12V/7Ah battery  
Datasheet: [Link](#)  
CSB or Panasonic brand can also be used

Use UPS configurator on [www.powerwalker.com](http://www.powerwalker.com) for detailed backup time information.

Version: EN 18/07/2014  
We reserve the right for technical changes and mistakes