



1 2 3 4 5 6

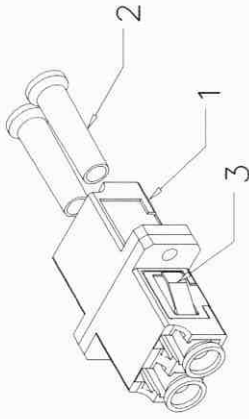

SCALE 1/1



SUGGESTED PANEL CUTOUT




Specification:

Material:

1. Housing: PC UL 94V-0, Blue Color.
2. Dust Cover: PP3105, White Color.
3. Clip: Stainless.

Performance:

- a. LC Duplex Type . Singlemode.
- b. Sleeve: Zirconia.
- c. Operation Temperature: -20°C to +70°C.
- d. Durability: 500 cycles.
- e. Tensile Strength: 10 kgf.
- f. Insertion Loss: <0.2 dB.



A

B

C

D

1 2 3 4 5 6 10cm

GENERAL TOLERANCE OF DIMENSIONS

X.XXX ±0.005
X.XX ±0.05
X.X ±0.1

DRAWING CHECK	20.MAY.2005	Michelle YTY
APPROVAL	20.MAY.2005	YTY

SCALE	1/1 (A4)	UNIT	mm
DATE		NAME	
DRAWING NO.		DRAWING CLASSIFICATION	

ITEM NO.: FIBER LC-LC II SM SCFOOT
DES: LC Duplex Adaptor Type (SM)
FIBER LC-LC II SM SCFOOT

meditronik



SHEET 1 OF 1