

1

2

3

4

5

6

7

A

A

B

B

C

C

D

D



E

E




F

F

Notes:
 1. Insulator: PC GF UL 94V-1, Grey
 2. Contact: Copper ALLOY
 Plating: Hard Silver Plated
 50 Mating cycles

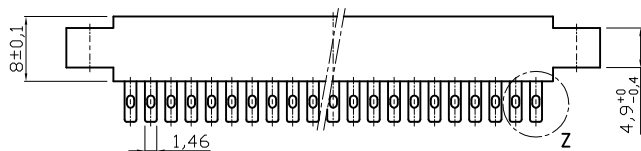

No. of pos.	A ±0,3	B ±0,1	C ±0,1	D	Part No.
13	45.8	40	12x2.5=30	35	A-13S2/SILVER
21	65.8	60	20x2.5=50	55	A-21S2/SILVER
31	90.8	85	30x2.5=75	80	A-31S2/SILVER

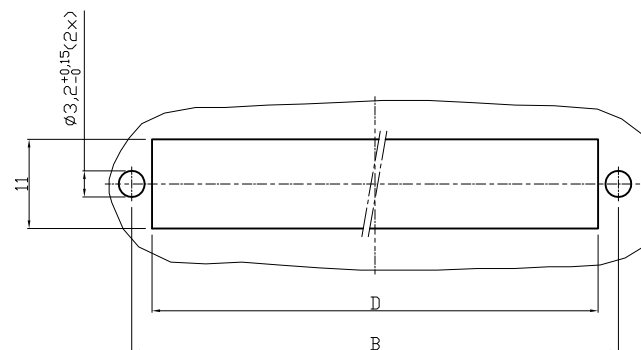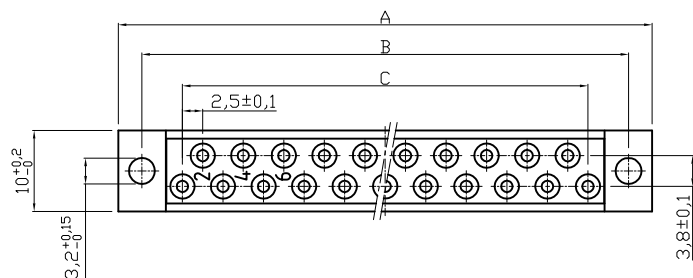

PANEL CUT OUT

RoHS compliant

Scale	1:1						Date	Name	Customer-No.
TOLERANCE						Drawn	31.08.2009	Dean	ASSMANN WSW-No. A-xxS2/SILVER
X.	±X					Approved	31.08.2009	Hellwig	
X.X	±X								
X.XX	±X								
X°	±X								
		①	Drawn	31.08.2009	Dean	ASSMANN WSW components		Drawing-No.	ASS 3683 CO
		Id.	Modification	Date	Name			Replace	

1

2

3

4

5

6

7

H

H