





Single Turn Wire Wound Potentiometer, R.W-1

The most sought after product in Domestic and International market from PANKAJ, model R.W-1 marks it's presence since over five decades. Offers best value for money in manual setting application.

Features

- Brass Nickel Plated Bush & Spindle
- Tin Plated Terminals
- High Grade Engineering Moulded Plastic Housing

Optional Features

- Anti Rotating Mounting Plate
- Various Shaft Lengths and Designs
- Shaft Locking Nut

Electrical Specifications

Resistance Range	25Ω to 25KΩ	
Resistance Tolerance	<u>+</u> 10% Standard, <u>+</u> 5% Special	
Power Rating	1 Watt @ 40°C	
End Resistance	0.2Ω or 0.02% which ever is greater	
Elec. Angle of Rotation	265° <u>+</u> 15°	
Maximum Working Voltage	250VDC	
Insulation Resistance	200MΩ @ 500VDC	
Voltage Proof	750VAC for 1 Min. At Sea level	
TCR of Resistance Wire	150 ppm/°C	
Rotational Life Expectancy	20,000 Cycles at 15 RPM	
Temperature Range	0 - 70°C.	



Mechanical Specifications

Housing Diameter	24mm
Housing Length	16mm
Shaft Diameter	6.3mm
Shaft Length	19mm or 25mm Standard
Bush Mounting	3/8" x 32 TPI, 10mm long
Mechanical Angle of Rot.	285° <u>+</u> 15°



Applications


- Temperature Controllers
- Power Supplies, AC/DC Motor Drives
- Process Control Equipments
- Test and Measuring Instruments
- Control Panels
- Offset Settings & many more.

Single Turn Wire Wound Potentiometer, R.W-1

Product Images



Dimensional Diagram

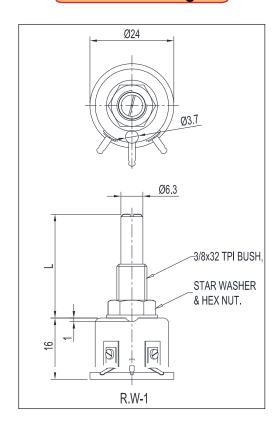

Other Options



Lugs at 180°



Shaft dia. 6mm, length 25mm



Shaft dia. 6mm, length 40mm

Ordering Information Example: R.W-1, 10K, 25mm

Model No.	Resistance Value	Shaft Length in mm	Other Options
R. W-1	25, 50, 100, 150, 200, 250, 500, 1K, 2K, 2K5, 3K, 5K, 10K, 20K, 25K		F - Flattened Shaft P - Locking Plate L - Shaft Locking Nut

Note: We reserve the right to make any kind of design, specifications or functional modification at any moment without prior notice

