


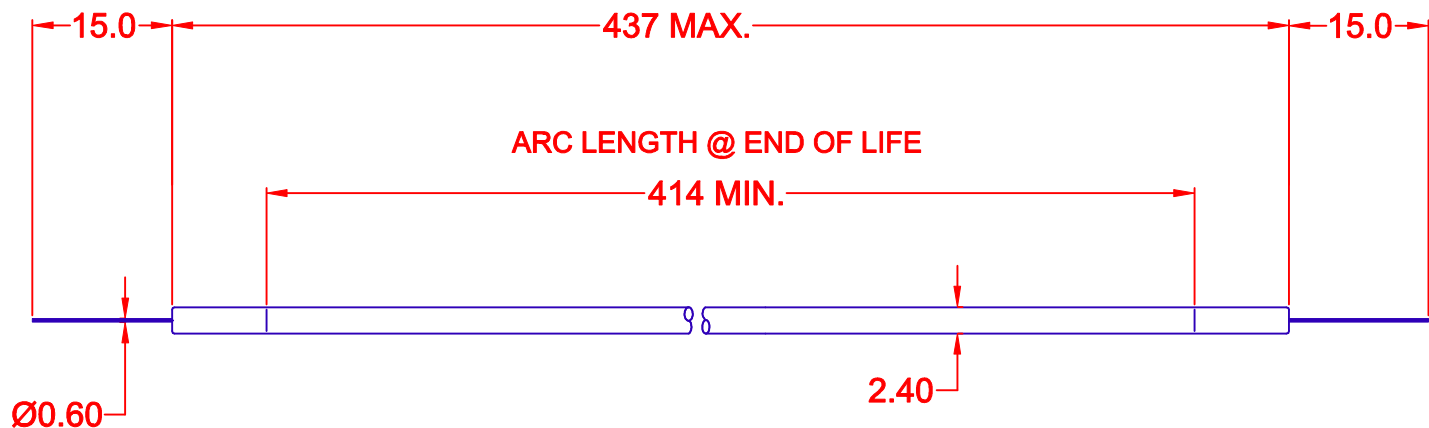

LAMP PART NUMBER	COLOR	STARTING CIRCUIT VOLTAGE VS (Vrms)	OPERATING LAMP VOLTAGE VL (Vrms)	OPERATING LAMP CURRENT IL (mAmps)	BRIGHTNESS (CANDELA/m2)	*RATED LIFE (HRS)
BF24438-33B	WHITE 10,000°k x = .283 y = .299	1400 TYP. @ 0°C 1820 MAX.	835	5.0		30,000+
				6.5±5%	38,000±10%	

* RATED LIFE IS DEFINED AS THE POINT AT WHICH THE INTENSITY BECOMES 50% OF THE INITIAL RATING.

			METRIC THIRD ANGLE PROJECTION	DIMENSIONS ARE IN MILLIMETERS TOLERANCE UNLESS OTHERWISE SPECIFIED 1 PL +/- 1.0 2 PL +/- 0.05 ANGLE +/- 0		COMPONENTS CORPORATION				
				TITLE MINIATURE COLD CATHODE FLUORESCENT LAMP						
			DRAWN BY L. WENGSTROM	APPV'D BY J.K.	DATE 3/17/04	SIZE A	FSCM NO. 55335	DRAWING NO. BF24438-33B		
			- CAD DRAWING - MANUAL REVISIONS NOT PERMITTED			SCALE NONE	RELEASED DATE 3/17/04	REVISION DATE	REV. NO.	SHEET 1 OF 1
REV. NO.	DESCRIPTION/ECO NUMBER	APPV'D DATE								
	RELEASED	3/17/04								