


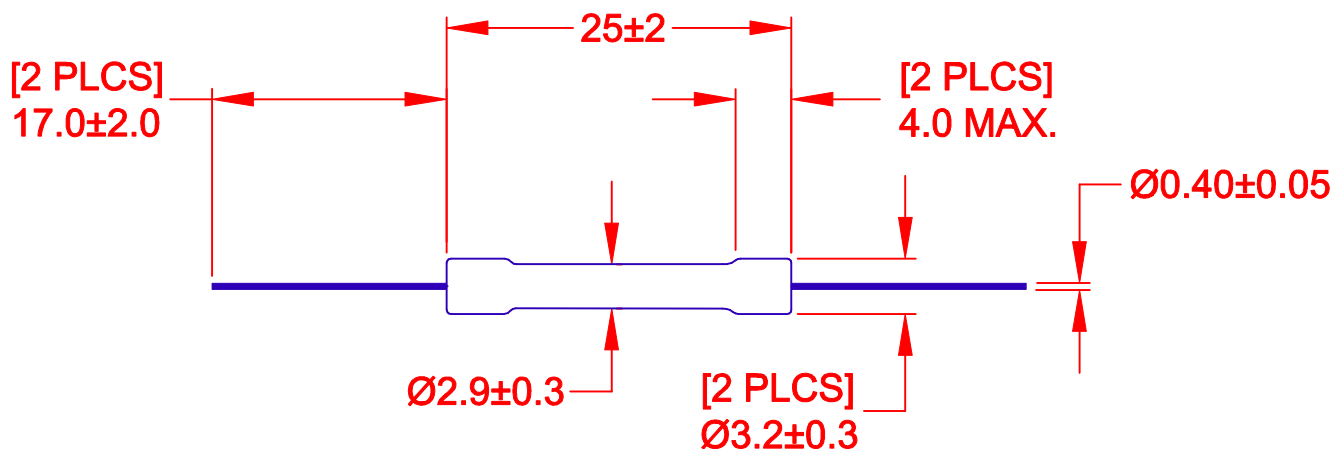

LAMP PART NUMBER	COLOR	STARTING CIRCUIT VOLTAGE VS (Vrms)	OPERATING LAMP VOLTAGE VL (Vrms)	OPERATING LAMP CURRENT IL (mA rms)	BRIGHTNESS (CANDELA/m2)	*RATED LIFE (HRS)
BF325-22B	LCD HIGH OUTPUT WHITE 7400°k RGB	400 @ 25°C	165	5	19,000 ± 10%	7,500

* RATED LIFE IS DEFINED AS THE POINT AT WHICH THE INTENSITY BECOMES 50% OF THE INITIAL RATING.

			METRIC  THIRD ANGLE PROJECTION		DIMENSIONS ARE IN MILLIMETERS TOLERANCE UNLESS OTHERWISE SPECIFIED 1 PL +/- 0 2 PL +/- 0 ANGLE +/- 0		COMPONENTS CORPORATION TITLE MINIATURE COLD CATHODE FLUORESCENT LAMP									
B	26±2 TO 17±2 - DRAW. TO CAD		8/1/01		DRAWN BY		APPY'D BY		DATE	SIZE	FSCM NO.	DRAWING NO.				
A	25±1 TO 25±2-17±2 TO 26±2		5/15/98		L. WENGSTROM		F.D.		8/2/01	A	55335	BF325-22B				
RELEASED			9/12/97													
REV. NO.	DESCRIPTION/ECO NUMBER		APPY'D DATE		- CAD DRAWING -		SCALE				RELEASED DATE	9/12/97	REVISION DATE	8/1/01	REV. NO. B	SHEET 1 OF 1
					MANUAL REVISIONS NOT PERMITTED					NONE						