


REV.	DESCRIPTION/ECO NO.	DATE
	RELEASE AND CANCEL	1/31/03
	BXA-12579/KIT & BXA-12579/INV	

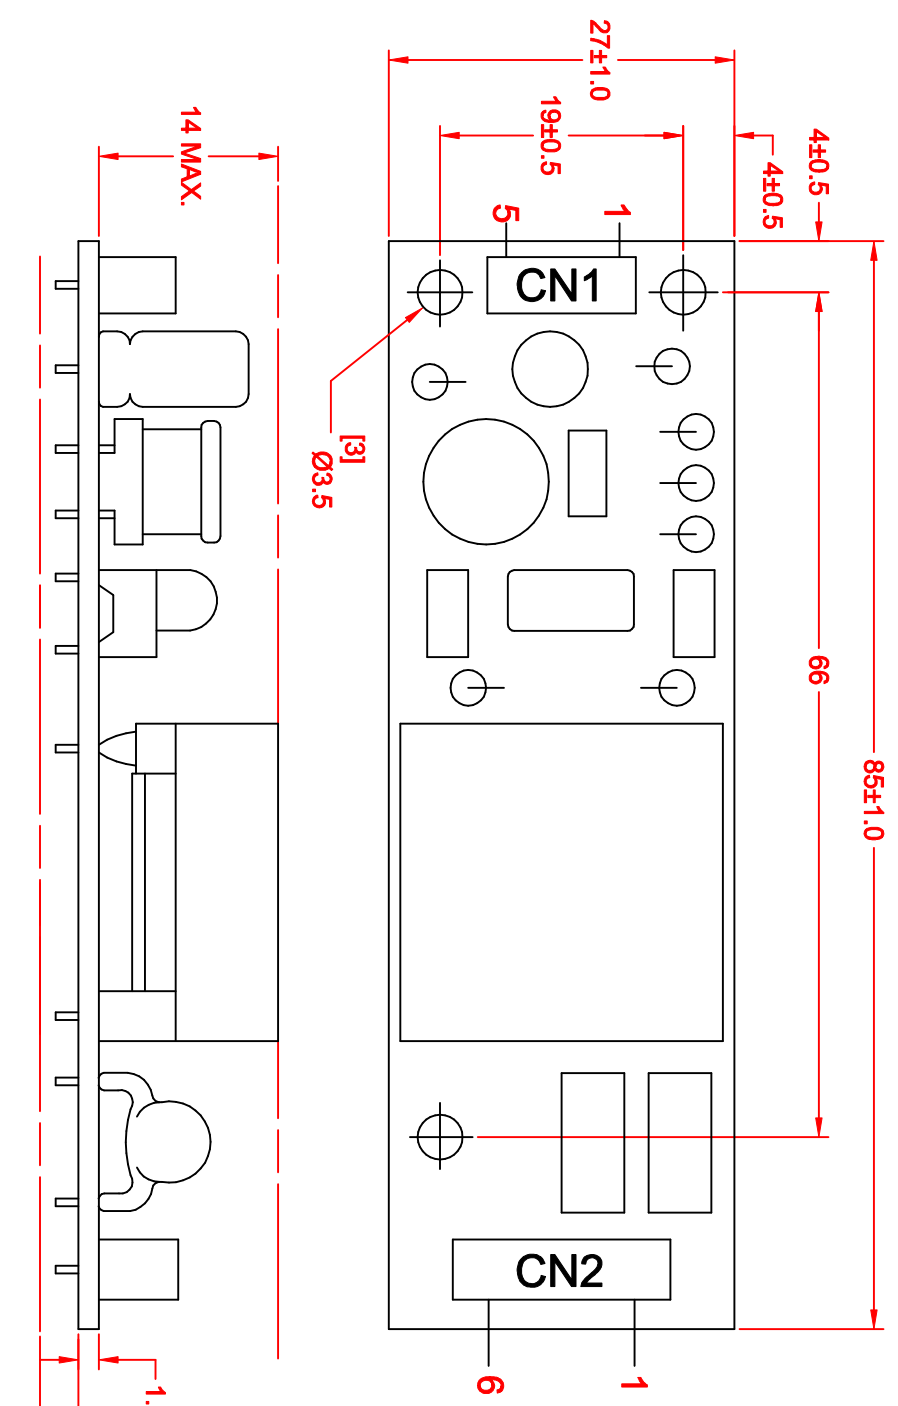

NO.	PIN NUMBER	MATING WIRE HARNESS
CN1	1	BXC-10605
	2	
	3	
	4	
	5	
CN2	1	BXC-10569
	2	
	3	
	4	
	5	
	6	

OPERATING SPECIFICATIONS

CHARACTERISTICS	MIN	TYP	MAX
INPUT VOLTAGE: (Vdc)	10.8	12.0	13.2
INPUT CURRENT: (mA)	---	550	1000
OUTPUT VOLTAGE: (Vrms)	---	1500	---
OUTPUT CURRENT 2 X (mA)	4.5	5.0	5.5
OUTPUT FREQUENCY: (KHz)	20	30	40
DIMMING RANGE (OPTION)	10% REF.	---	100% REF.
OPERATING TEMP: (CELSIUS)	0	25	50

METRIC	DIMENSIONS ARE IN MILLIMETERS	TOLERANCE UNLESS OTHERWISE SPECIFIED
THIRD ANGLE PROJECTION	1 PL +/- 0.3	2 PL +/- 0

COMPONENTS CORPORATION

INVERTER WITH DIMMING OPTION

DRAWN BY	APPR'D BY	DATE	SCALE	SIZE	FSCH NO.	DRAWING NO.	RELEASED DATE	REVISION DATE	REV. NO.	SHEET OF
L. WENGSTROM	F. D.	1/31/03	A	55335	BXA-12579	1/31/03				

- CAD DRAWING -
MANUAL REVISIONS NOT PERMITTED

NOTE:
MATING CONNECTORS ARE NOT INCLUDED WITH INVERTER. JKL WIRE HARNESS BXC-10605 AND BXC-10569 CAN BE ORDERED SEPARATELY.