

## ADVANCE INFORMATION

All information in this data sheet is preliminary and subject to change.

7/95

# MAXIM

## $\pm 15\text{kV}$ ESD-Protected, +5V RS-232 Transceiver

MAX203E

### General Description

The MAX203E transceiver is designed for RS-232 and V.28 communications in harsh environments. Each driver output and receiver input is protected against  $\pm 15\text{kV}$  electrostatic discharge (ESD) shocks, without latchup. The MAX203E has two drivers and two receivers. The drivers and receivers meet all EIA/TIA-232E and CCITT V.28 specifications at data rates up to 120kbps when loaded in accordance with the EIA/TIA-232E specification.

The MAX203E comes in 20-pin DIP and wide SO packages, and requires no external charge-pump capacitors.

### Features

#### Better than Bipolar!

##### ♦ ESD Protection for RS-232 I/O Pins:

$\pm 15\text{kV}$ —Human Body Model

$\pm 8\text{kV}$ —IEC801-2, Contact Discharge

$\pm 15\text{kV}$ —IEC801-2, Air-Gap Discharge

##### ♦ Latchup Free (unlike bipolar equivalents)

##### ♦ 2 Drivers, 2 Receivers

##### ♦ Guaranteed 120kbps Data Rate—LapLink™ Compatible

##### ♦ Guaranteed $3\text{V}/\mu\text{s}$ Min Slew Rate

##### ♦ Operate from Single +5V Power Supply


### Applications

Notebook, Subnotebook, and Palmtop Computers

Battery-Powered Equipment

Hand-Held Equipment

### Pin Configurations

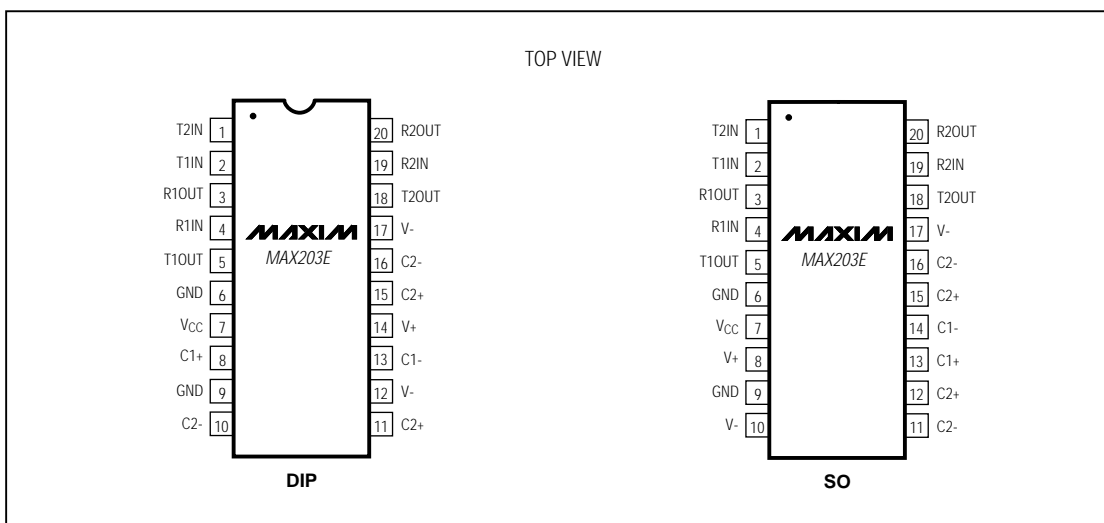

LapLink is a registered trademark of Traveling Software, Inc.

# MAXIM

Maxim Integrated Products 1

Call toll free 1-800-998-8800 for free samples or literature.