


SV	450 N	-	with solder lug terminals and metal slider 25 mm
SV	451 N	-	with solder lug terminals and plastic slider 15 mm
SVT	450 N	-	with solder lug terminals, metal slider 25 mm and a tap
SVT	451 N	-	with solder lug terminals, plastic slider 15 mm and a tap
SVP	452 N	-	with printed circuit terminals and metal slider 25 mm
SVP	453 N	-	with printed circuit terminals and plastic slider 15 mm
SVPT	452 N	-	with printed circuit terminals, metal slider 25 mm and a tap
SVPT	453 N	-	with printed circuit terminals, plastic slider 15 mm and a tap

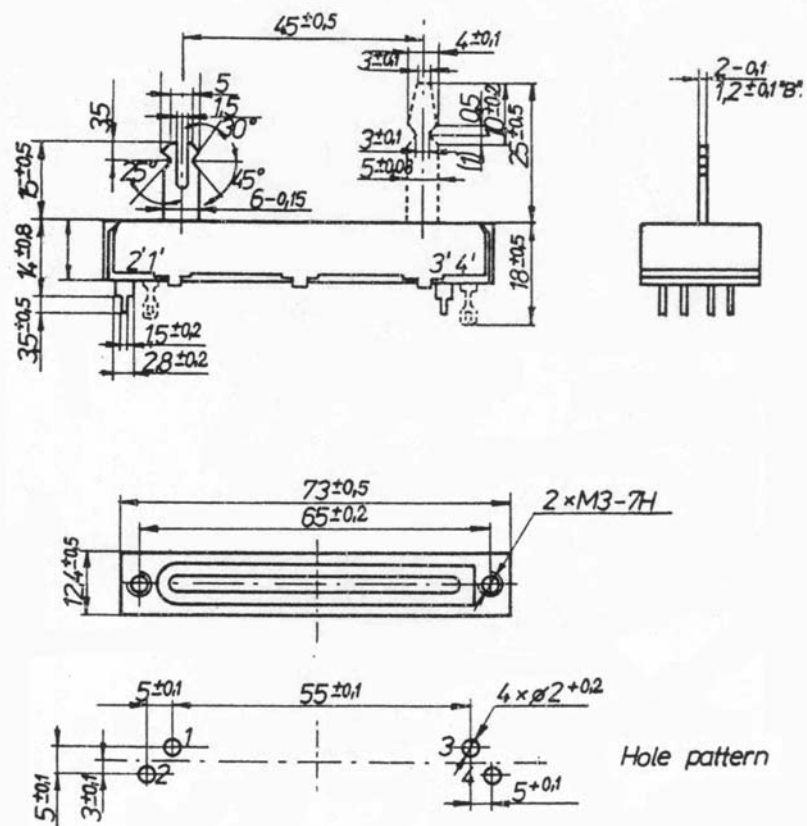

SVP/T/ 45N

Climatic category	25/070/10
Rated power $P_n$ :	
resistance law A	- 0.25 W
resistance law B	- 0.125 W
Limiting voltage :	
resistance law A	- 350 V
resistance law B	- 250 V
Category power	- 25 % $P_n$
Rated resistance :	according to the series 1 - 2.2 - 4.7 - 10 etc.
Resistance range :	
resistance law A	- 470 $\Omega$ - 2.2 M $\Omega$
resistance law B	- 1 k $\Omega$ - 2.2 M $\Omega$
Resistance tolerance :	$\pm$ 20 % for $R_n \leq 220$ k $\Omega$
	$\pm$ 30 % for $R_n > 220$ k $\Omega$