



CONTACT STRIPS ADAPTER


1 to 40 contacts

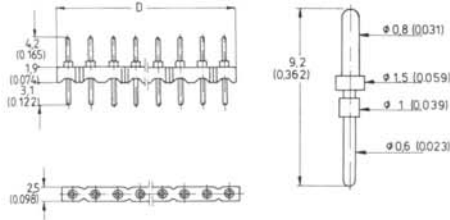


No. of contacts	Dimension D	Part no.
20	50.80	IAPS 20 ELO-G

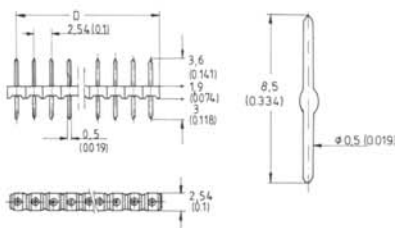


No. of contacts	Dimension D	Part no.
20	50.80	IAPS 20 EL 6
20	111.60	IAPS 40 EL 6

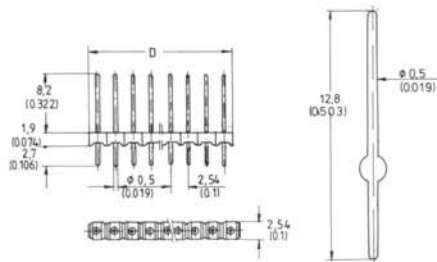

No. of contacts	Dimension D	Part no.
20	50.80	IAPS 20-EL 9
40	111.60	IAPS 40-EL 9

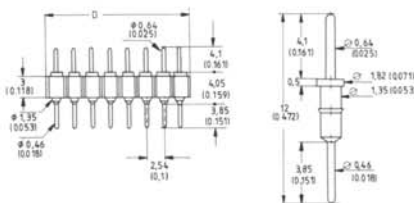

No. of contacts	Dimension D	Part no.
20	50.80	IAPS 20-SP-G
32	81.30	IAPS 32-SP-G

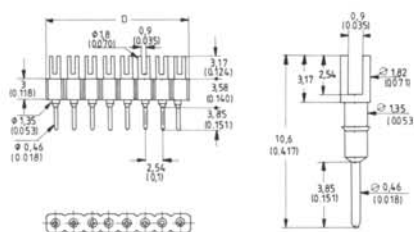

No. of contacts	Dimension D	Part no.
20	50.80	IAPS 20-SF-G
32	81.30	IAPS 32-SF-G



SPECIFICATIONS

Current Rating:	1A/Pin
Contact Material:	Brass
Contact Plating:	Gold
Insulator Material:	Polyester, UL 94 V-0
Temperature Rating:	-65° to 170°C

FEATURES

- Precision turned Swiss small case pins
- Fit standard DIP with 2.54x2.54 mm (1.00"x.100") pin spacing
- Low profile for max. packaging density
- Solder or solder fork pin terminations.