
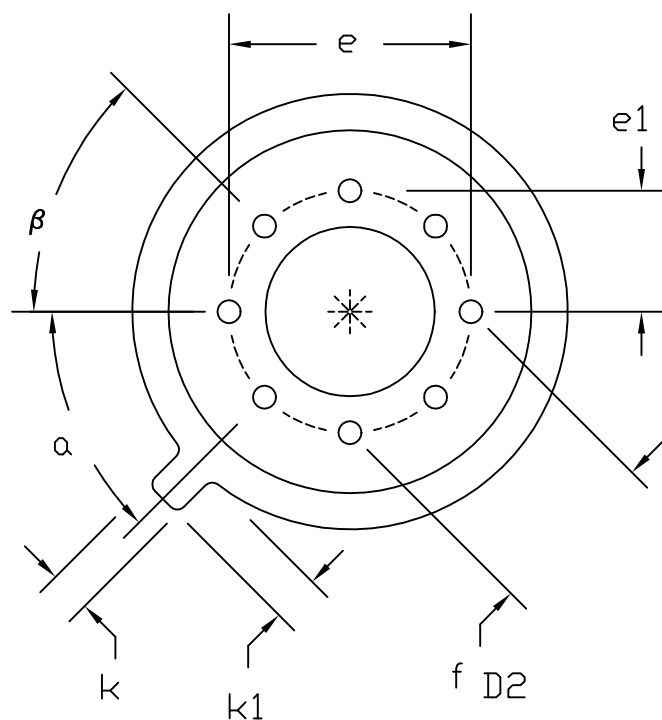


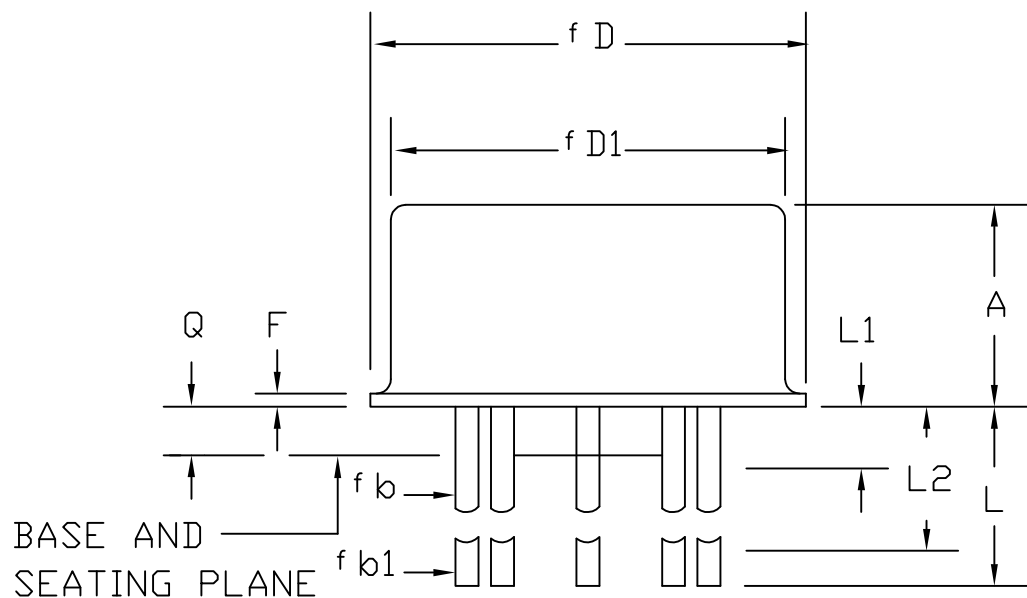

SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	.165	.185	4.19	4.70
f b	.016	.019	0.41	0.48
f b1	.016	.021	0.41	0.53
f b2	.016	.024	0.41	0.61
f D	.335	.375	8.51	9.40
f D1	.305	.335	7.75	8.51
f D2	.110	.160	2.79	4.06
e	.200	BSC	5.08	BSC
e1	.100	BSC	2.54	BSC
F	----	.040	----	1.02
k	.027	.034	0.69	0.86
k1	.027	.045	0.69	1.14
L	.500	.750	12.70	19.05
L1	----	.050	----	1.27
L2	.250	----	6.35	----
Q	.010	.045	0.25	1.14
α	45°	BSC	45°	BSC
β	45°	BSC	45°	BSC

NOTES: DIMENSIONS ARE COMPLIANT TO MIL-STD-1835, A1.

TOLERANCES UNLESS
OTHERWISE SPECIFIED
FRACTIONS DEC ANGLES
± N/A ±.001 ± N/A

MAXIM

PROPRIETARY INFORMATION

DRAWN BY:

DATE:

TITLE:

CASE OUTLINE TO-99, 8LD

APPROVED BY:

DATE:

DOCUMENT CONTROL NO.

REV.

21-0022

A