



## D-subminiature Backshells - Two-Piece D\*H Series

### EMI/RFI Shielded Diecast Backshells


#### 9 and 15 Position

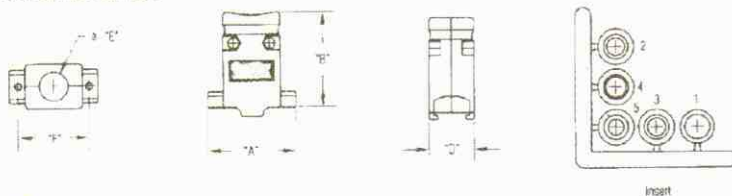

#### 25 Position

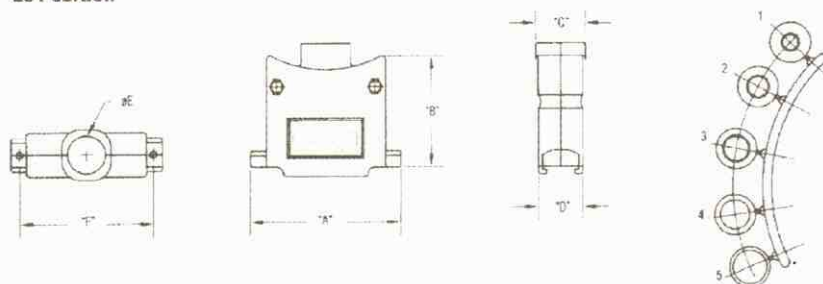

#### 37 and 50 Position

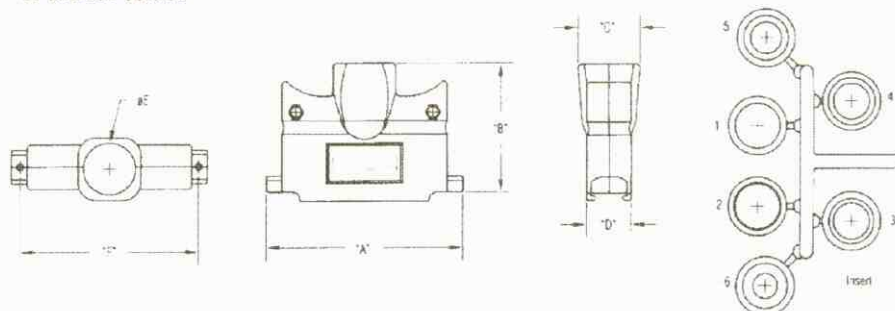

### Dimensions

| Shell Size | A     |       | B     |       | C     |       | D     |       | E     |       | F     |       |
|------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
|            | in    | mm    | in    | mm    | in    | mm    | in    | mm    | in    | mm    | in    | mm    |
| E          | 1.225 | 31.12 | 1.465 | 37.21 | 0.620 | 15.75 | 0.620 | 15.75 | 0.400 | 10.16 | 0.984 | 24.99 |
| A          | 1.540 | 39.12 | 1.600 | 40.64 | 0.620 | 15.75 | 0.620 | 15.75 | 0.400 | 10.16 | 1.312 | 33.32 |
| B          | 2.090 | 53.09 | 1.570 | 39.88 | 0.690 | 17.53 | 0.620 | 15.75 | 0.525 | 13.34 | 1.857 | 47.17 |
| C          | 2.730 | 69.34 | 1.810 | 45.97 | 0.862 | 21.89 | 0.620 | 15.75 | 0.725 | 18.42 | 2.500 | 63.50 |
| D          | 2.624 | 66.65 | 1.800 | 45.72 | 0.862 | 21.89 | 0.730 | 18.54 | 0.725 | 18.42 | 2.406 | 61.11 |

### Ordering Information

#### D\*H Two-Piece Backshells

| Shell Size | Fits Standard Density | Fits HTD 1.5 Density | Cable Entry Style | Plastic | Cable Dia. (in) | Metallized Plastic | Cable Dia. (in) | Diecast Metal | Cable Dia. (in) |
|------------|-----------------------|----------------------|-------------------|---------|-----------------|--------------------|-----------------|---------------|-----------------|
| E          | 9                     | 15                   | Straight (180°)   |         | .210-.320       |                    | .210-.350       |               | .210-.320       |
| A          | 15                    | 26                   | Straight (180°)   |         | .210-.320       |                    | .210-.350       |               | .210-.320       |
| B          | 25                    | 44                   | Straight (180°)   |         | .230-.450       |                    | .230-.450       |               | .230-.450       |
| C          | 37                    | 62                   | Straight (180°)   |         | .350-.650       |                    | .350-.640       |               | .350-.650       |
| D          | 50                    | N/A                  | Straight (180°)   |         | .350-.650       |                    | .350-.640       |               | .350-.640       |