


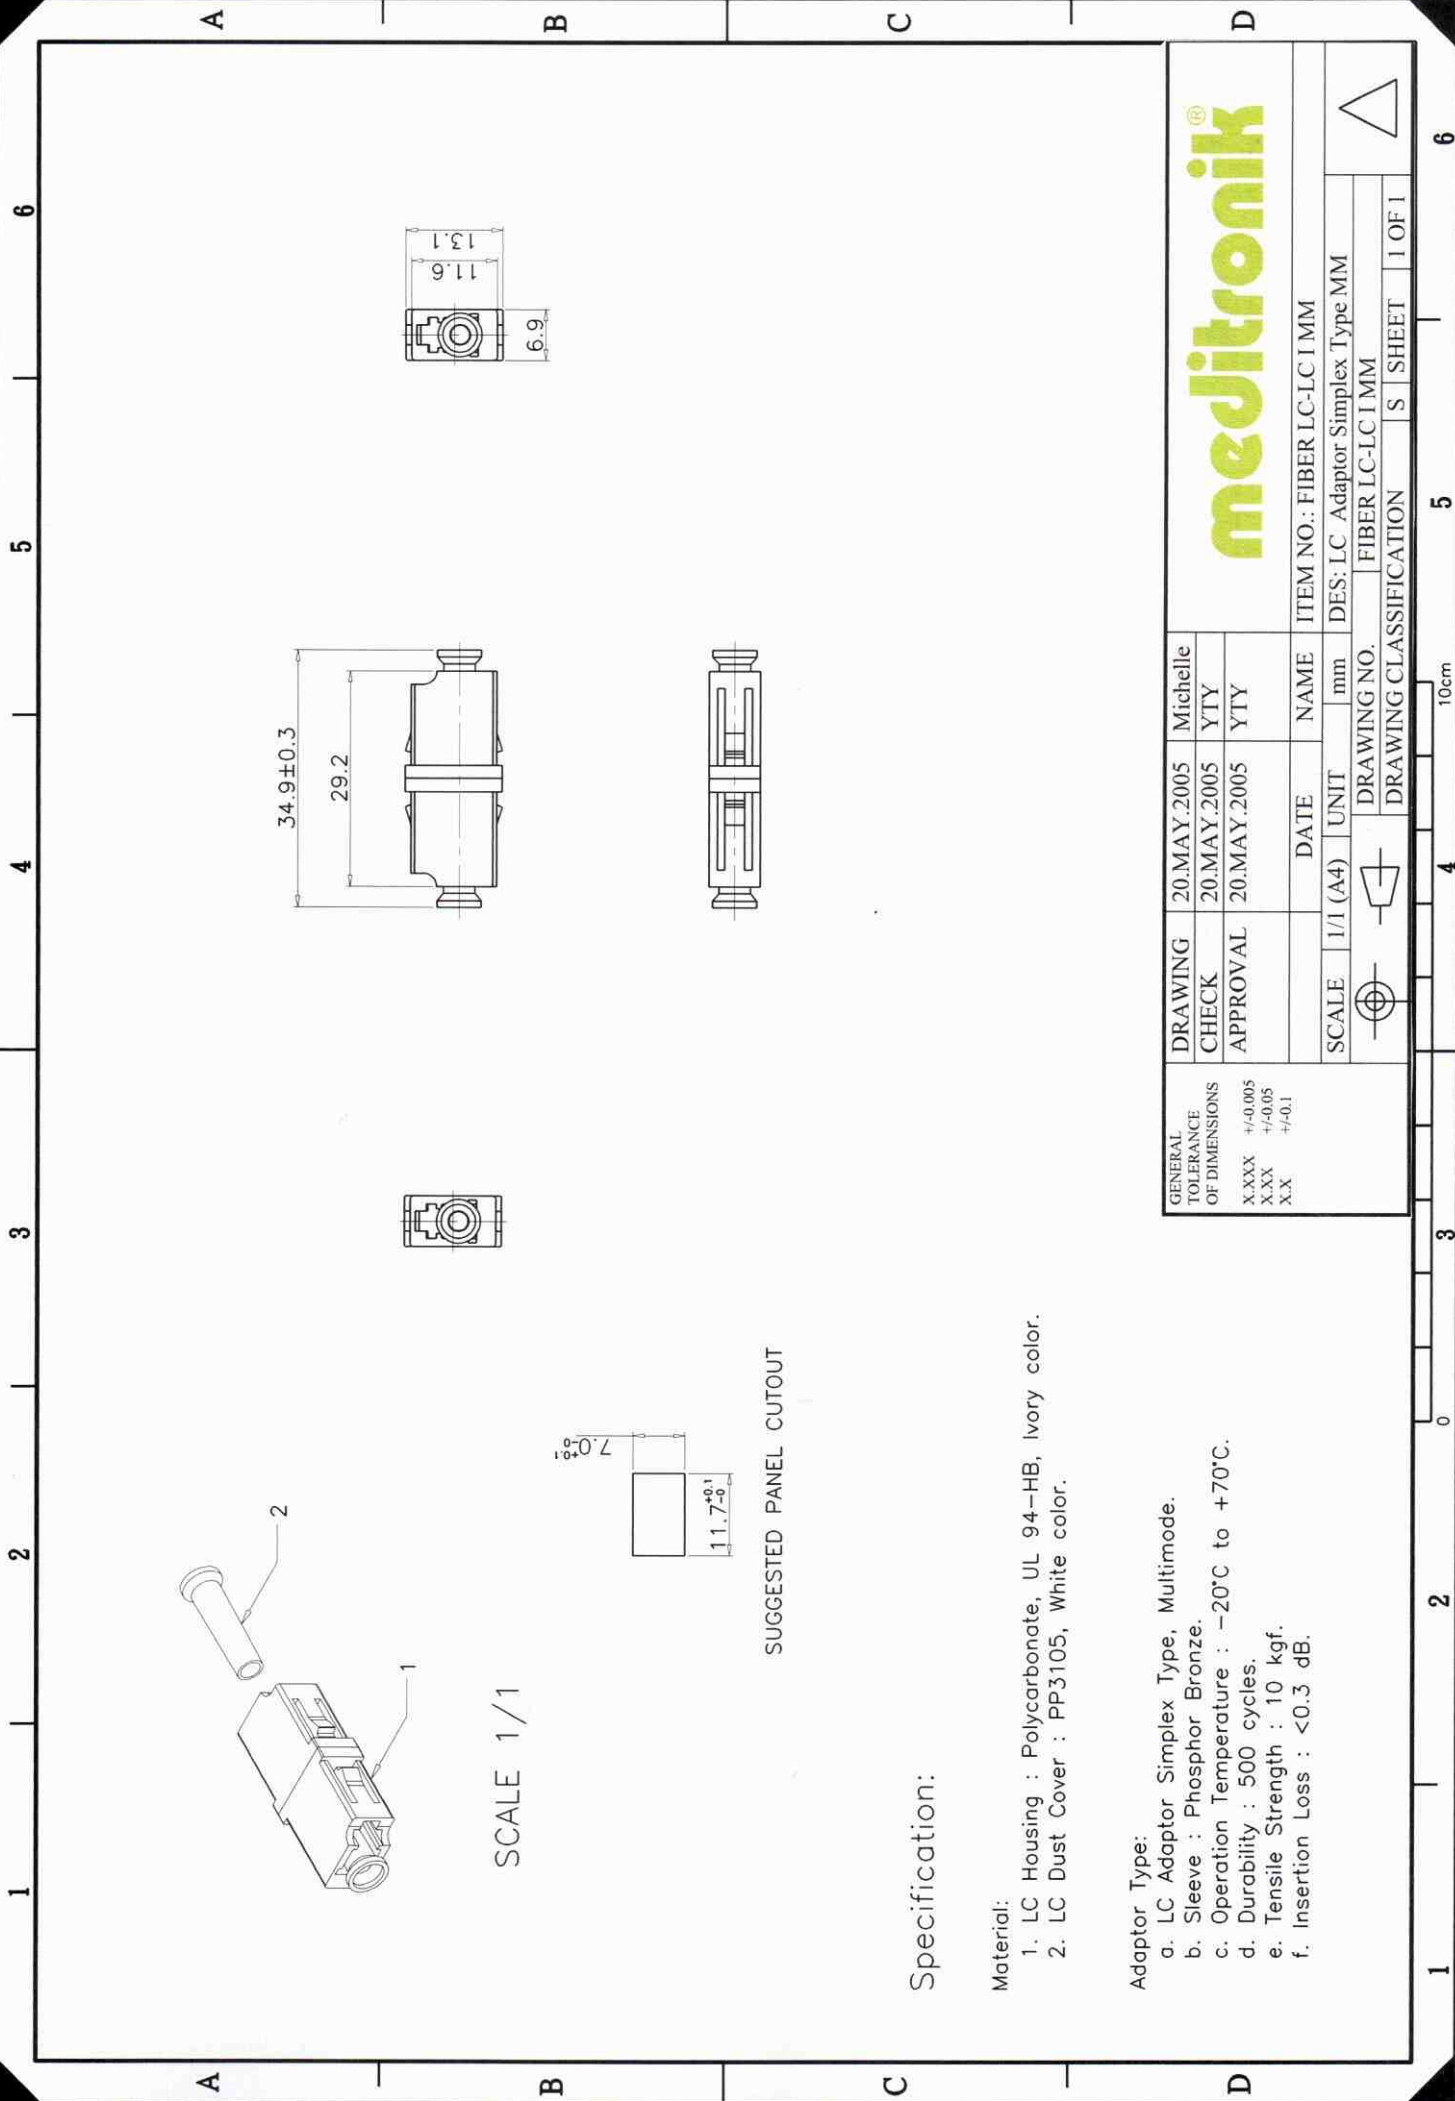

SUGGESTED PANEL CUTOUT

Specification:

Material:

1. LC Housing : Polycarbonate, UL 94-HB, Ivory color.
2. LC Dust Cover : PP3105, White color.

Adaptor Type:

- a. LC Adaptor Simplex Type, Multimode.
- b. Sleeve : Phosphor Bronze.
- c. Operation Temperature : -20°C to +70°C.
- d. Durability : 500 cycles.
- e. Tensile Strength : 10 kgf.
- f. Insertion Loss : <0.3 dB.

GENERAL TOLERANCE OF DIMENSIONS X.XXX ± 0.005 X.XX ± 0.05 X.X ± 0.1		DRAWING	20.MAY.2005	Michelle	meditronik [®] ITEM NO.: FIBER LC-LC I MM DES: LC Adaptor Simplex Type MM FIBER LC-LC I MM	
		CHECK	20.MAY.2005	YTY		
		APPROVAL	20.MAY.2005	YTY		
		SCALE	1/1 (A4)	UNIT	mm	NAME
				DATE		
				DRAWING NO.		
				DRAWING CLASSIFICATION	S	SHEET 1 OF 1



10cm