


SCALE 1/1



SUGGESTED PANEL CUTOUT





### Specification :

#### Material :

1. SC Dust Cover : PP, Black color.
2. SC Housing : PA66, Ivory color.
3. Holder : PBT, UL 94V-0, Ivory color.

#### Adaptor Type :

- a. SC to SC Simplex Type, Multimode.
- b. Sleeve: Phosphor Bronze.
- c. Operation Temperature: -20°C to +70°C.
- d. Durability: 500 cycles.
- e. Tensile Strength: 10 kgf.
- f. Insertion Loss: <0.3 dB.

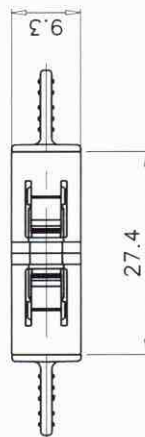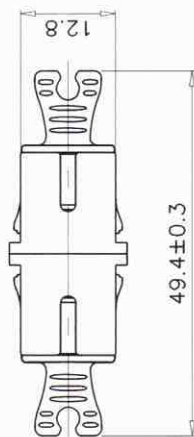

GENERAL  
TOLERANCE  
OF DIMENSIONS  
X.XXX  $\pm 0.005$   
X.XX  $\pm 0.05$   
X.X  $\pm 0.1$

DRAWING  
CHECK 20.MAY.2005 Michelle  
APPROVAL 20.MAY.2005 YTY  
DATE UNIT NAME  
1/1 (A4) mm

**meditronik®**

ITEM NO.: FIBER SC-SC 1 MM FLANGELESS

DES: SC to SC Adaptor Simplex Type MM

FIBER SC-SC 1 MM FLANGELESS

DRAWING CLASSIFICATION S SHEET 1 OF 1

