


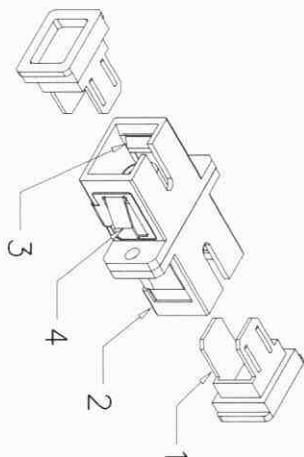




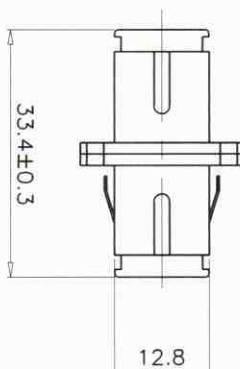

SCALE 1/1



SUGGESTED PANEL CUTOUT



Specification :

Material :

1. SC Dust Cover : PP, Black color.
2. SC Housing : PBT, UL 94V-0, Blue color.
3. Holder : PBT, UL 94V-0, Blue color.
4. Clip : STAINLESS.

Adaptor Type :

- a. SC to SC Simplex Type, Singlemode.
- b. Sleeve : Zirconia.
- c. Operation Temperature : -20°C to +70°C.
- d. Durability : 500 cycles.
- e. Tensile Strength : 10 kgf.
- f. Insertion Loss : <0.2 dB.

GENERAL
TOLERANCE
OF DIMENSIONS
X.XXX ±0.005
X.XX ±0.05
X.X ±0.1

DRAWING	20.MAY.2005	Michelle
CHECK	20.MAY.2005	YTY
APPROVAL	20.MAY.2005	YTY

SCALE	1/1 (A4)	UNIT	mm	NAME	ITEM NO.: FIBER SC-SC I SM
-------	----------	------	----	------	----------------------------

DRAWING NO.	DES: SC to SC Adaptor - Simplex Type SM
DRAWING CLASSIFICATION	FIBER SC-SC I SM
SHEET	1 OF 1

meditronik

