


SCALE 1/1



SUGGESTED PANEL CUTOUT





Specification :

Material :

1. SC Dust Cover : PP, Black color.
2. SC Housing : PA66, Blue color.
3. Holder : PBT, UL 94V-0, Blue color.

Adaptor Type :

- a. SC to SC Simplex Type, Singlemode.
- b. Sleeve: Zirconia.
- c. Operation Temperature: -20°C to $+70^{\circ}\text{C}$.
- d. Durability: 500 cycles.
- e. Tensile Strength: 10 kgf.
- f. Insertion Loss: <0.2 dB.

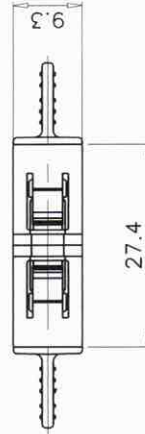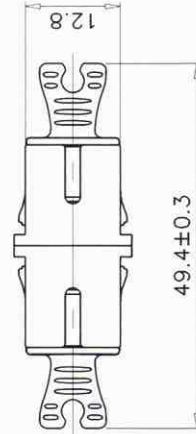

GENERAL
TOLERANCE
OF DIMENSIONS
X.XXX ± 0.005
X.XX ± 0.05
X.X ± 0.1

DRAWING
CHECK 20.MAY.2005 Michelle
APPROVAL 20.MAY.2005 YTY

SCALE 1/1 (A4) UNIT mm NAME DATE

DRAWING NO. FIBER SC-SC I SM FLANGELESS
DRAWING CLASSIFICATION S SHEET 1 OF 1

meditronik

ITEM NO.: FIBER SC-SC I SM FLANGELESS

DES: SC to SC Adaptor-Simplex Type SM
FIBER SC-SC I SM FLANGELESS

