



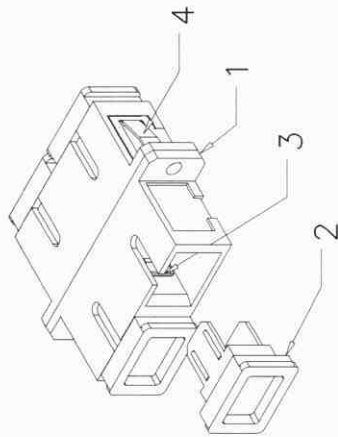

SCALE 1/1



SUGGESTED PANEL CUTOUT



Specification :

Material :

1. SC Housing : PBT, UL 94V-0, Blue color.
2. SC Dust Cover : PP, Black color.
3. Holder : PBT, UL 94V-0, Blue color.
4. Clip : STAINLESS.

Adaptor Type :

- a. SC to SC Duplex Type, Singlemode.
- b. Sleeve : Zirconiã.
- c. Operation Temperature : -20°C to +70°C.
- d. Durability : 500 cycles.
- e. Tensile Strength : 10 kgf.
- f. Insertion Loss : <0.2 dB.

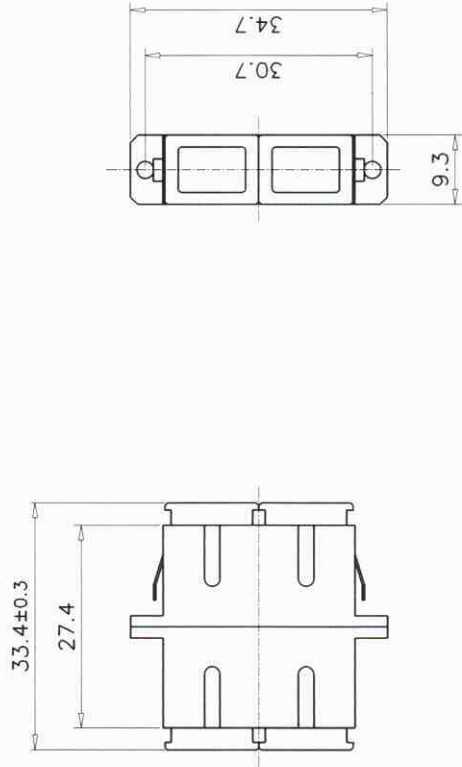

GENERAL TOLERANCE OF DIMENSIONS	
X.XXX	±0.005
X.XX	±0.05
X.X	±0.1

DRAWING CHECK	20.MAY.2005	Michelle YTY
APPROVAL	20.MAY.2005	YTY

ITEM NO.: FIBER SC-SC II SM

DES: SC to SC Adaptor-Duplex Type SM

FIBER SC-SC II SM

DRAWING NO.

DRAWING CLASSIFICATION

S SHEET 1 OF 1

meditronik

