



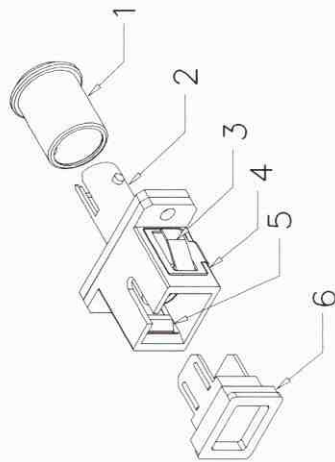

SCALE 1/1



SUGGESTED PANEL CUTOUT



Specification :

Material :

1. ST Dust Cover : PVC, Black color.
2. ST Housing : PBT, UL 94V-0, Blue color.
3. Clip : Stainless.
4. SC Housing : PBT, UL 94V-0, Blue color.
5. Holder : PBT, UL 94V-0, Blue color.
6. SC Dust Cover : PP, Black color.

Adaptor Type :

- a. ST to SC Simplex Type, Singlemode.
- b. Sleeve : Zirconia.
- c. Operation Temperature : -20°C to +70°C.
- d. Durability : 500 cycles.
- e. Tensile Strength : 10 kgf.
- f. Insertion Loss : <0.2 dB.

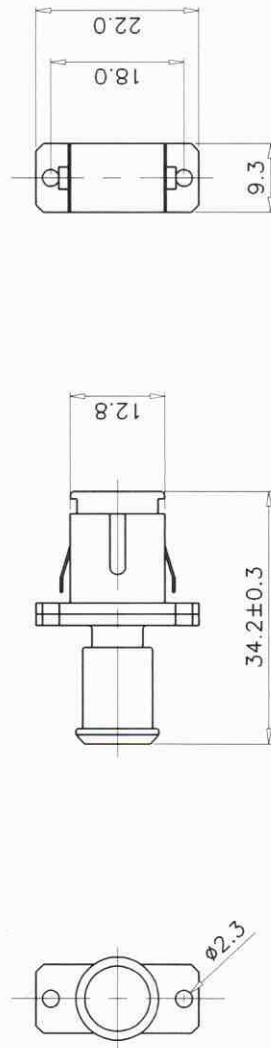

GENERAL
TOLERANCE
OF DIMENSIONS
X.XXX ± 0.005
X.XX ± 0.05
X.X ± 0.1

DRAWING CHECK	20.MAY.2005	Michelle
APPROVAL	20.MAY.2005	YTY
	20.MAY.2005	YTY

SCALE	1/1 (A4)	UNIT	mm	NAME	ITEM NO.:
					FIBER SC-ST I SM
					DES: ST to SC Adaptor-Simplex Type SM
					FIBER SC-ST I SM
					DRAWING CLASSIFICATION
					S SHEET 1 OF 1

meditronik®

ITEM NO.: FIBER SC-ST I SM

DES: ST to SC Adaptor-Simplex Type SM

FIBER SC-ST I SM

DRAWING CLASSIFICATION

S SHEET 1 OF 1