



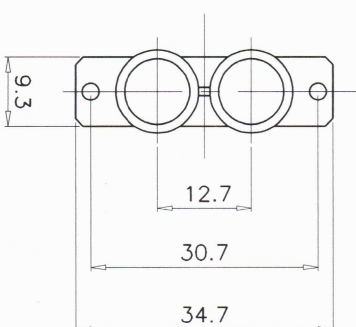


SCALE 1/1



SUGGESTED PANEL CUTOUT



# Specification:

## Material:

1. ST Housing: PBT UL 94V-0, Blue color.
2. ST Dust Cover: PVC, Black color.

## Performance:

- a. ST Duplex Type , Singlemode.
- b. Sleeve: Zirconia.
- c. Operation Temperature: -20°C to +70°C.
- d. Durability: 500 cycles.
- e. Tensile Strength: 10 kgf.
- f. Insertion Loss: <0.2 dB.

GENERAL  
TOLERANCE  
OF DIMENSIONS  
X.XXX ±0.005  
X.XX ±0.05  
X.X ±0.1

**meditronik®**

|          |             |                                    |
|----------|-------------|------------------------------------|
| DRAWING  | 20.MAY.2005 | Michelle                           |
| CHECK    | 20.MAY.2005 | YTY                                |
| APPROVAL | 20.MAY.2005 | YTY                                |
| DATE     | NAME        | ITEM NO.: FIBER ST-ST II SM FLANGE |
| SCALE    | 1/1 (A4)    | UNIT                               |
|          |             | mm                                 |

DRAWING NO. DES: ST Adaptor Duplex Type (SM)

DRAWING CLASSIFICATION FIBER ST-ST II SM FLANGE

S SHEET 1 OF 1

