

MK4 Series

Reed Sensors for Screw Fastening



APPLICATIONS

- **Position and limit switch**
Pneumatic or hydraulic actuator position indication and end travel limit switch
- **Door and window contacts**
Security system applications
- **Level sensor**
Use with magnetic floats for water level detection in coffee makers, washing machines or dishwashers

DESCRIPTION

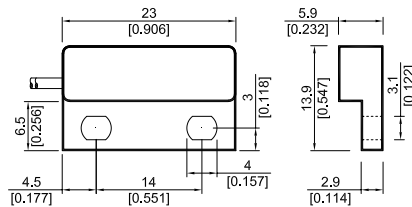
MK4 sensors are magnetically operated Reed proximity switches designed for screw mounting. The sensor should be mounted on a fixed surface with the actuating magnet on the moving surface. Introduction or removal of the magnetic field determines the closing and opening of the Reed Switch.

FEATURES

- Form A, B, and C available
- High power switches available
- Other cables, connectors and colors available
- Various case sizes available
- Five operate sensitivities available
- A choice of cable terminations and lengths are available

DIMENSIONS

All dimensions in mm [inches]



ORDER INFORMATION

Part Number Example

MK4 - 1A66 C - 500 W

1A is the contact form
66 is the switch model
C is the magnetic sensitivity
500 is the cable length (mm)
W is the termination




SERIES	CONTACT FORM	SWITCH MODEL	MAGNETIC SENSITIVITY	CABLE LENGTH (mm)	TERMINATION
MK4 -	XX	XX	X -	XXX	X
OPTIONS	1 Form A	66	B, C, D, E	500 *	W, X, Y
		81	A		
		84			
	1 Form B 1 Form C	90	C, D, E		
* Other cable lengths available.					

MAGNETIC SENSITIVITY

SENSITIVITY CLASS	PULL IN AT RANGE
A	5 - 10
B	10 - 15
C	15 - 20
D	20 - 25
E	25 - 30

TERMINATION

For wire and termination details please consult factory.
 Form C version requires 3 conductors.

W		The cable cut length includes: 5mm of wire stripped and tinned
X		The cable cut length includes: individual crimped terminals
Y		The cable cut length includes: individual spade terminals

MK4 Series

Reed Sensors for Screw Fastening

CONTACT DATA

All data at 20 °C	Switch Model --> Contact Form -->	Switch 66 Form A			Switch 81 Form A			Units
		Min.	Typ.	Max.	Min.	Typ.	Max.	
Contact Ratings	Conditions							
Switching Power	Any DC combination of V & A not to exceed their individual max.'s			10			5	W
Switching Voltage	DC or peak AC			200			90	V
Switching Current	DC or peak AC			0.5			0.5	A
Carry Current	DC or peak AC			1.25			1.0	A
Static Contact Resistance	w/ 0.5V & 10mA			150			200	mΩ
Dynamic Contact Resistance	Measured w/ 0.5V & 50mA 1.5 ms after closure			200			200	mΩ
Insulation Resistance across Contacts	100 Volts applied	10 ¹⁰ *			10 ⁹			Ω
Breakdown Voltage across Contacts	Voltage applied for 60 sec. min.	225 *			100			VDC
Operate Time, incl. Bounce	Measured w/ 100% overdrive			0.5			0.5	ms
Release Time	Measured w/ no coil suppression			0.1			0.1	ms
Capacitance	@ 10kHz across contact		0.2			0.2		pF
Contact Operation **								
Must Operate Condition	Steady state field	10		30	5		10	AT
Must Release Condition	Steady state field	4		27	2		9	AT
Environmental Data								
Shock Resistance	1/2 sine wave duration 11ms			50			30	g
Vibration Resistance	From 10 - 2000 Hz			20			10	g
Ambient Temperature	10 °C/ minute max. allowable	-20		85	-20		85	°C
Storage Temperature	10 °C/ minute max. allowable	-35		85	-35		85	°C
Soldering Temperature	5 sec. dwell			260			260	°C
Please note: The indicated electrical data are maximum values and can vary downwards when using a more sensitive switch. * Insulation resistance of 10 ¹² and breakdown voltage of 480 VDC is available. ** These ranges refer to the uncut / unmodified Reed Switches described in our Reed Switch section. Consult factory if more detail is required.								

CONTACT DATA

All data at 20 °C	Switch Model → Contact Form →	Switch 84 Form A			Switch 90 Form B / C			Units
		Min.	Typ.	Max.	Min.	Typ.	Max.	
Contact Ratings	Conditions							
Switching Power	Any DC combination of V & A not to exceed their individual max's			10			3	W
Switching Voltage	DC or peak AC			400			175	V
Switching Current	DC or peak AC			0.5			0.25	A
Carry Current	DC or peak AC			1.0			1.2	A
Static Contact Resistance	w/ 0.5V & 10mA			150			150	mΩ
Dynamic Contact Resistance	Measured w/ 0.5V & 50mA 1.5 ms after closure			200			250	mΩ
Insulation Resistance across Contacts	100 Volts applied	10 ¹¹			10 ⁹			Ω
Breakdown Voltage across Contacts	Voltage applied for 60 sec. min.	700			200			VDC
Operate Time, incl. Bounce	Measured w/ 100% overdrive			2.0			0.7	ms
Reset Time	Measured w/ no coil suppression			0.1			1.5	ms
Capacitance	@ 10kHz across contact		0.7			1.0		pF
Contact Operation **								
Must Operate Condition	Steady state field	15		30	10		35	AT
Must Reset Condition	Steady state field	6		27	4		30	AT
Environmental Data								
Shock Resistance	1/2 sine wave duration 11ms			50			50	g
Vibration Resistance	From 10 - 2000 Hz			20			20	g
Ambient Temperature	10 °C/ minute max. allowable	-20		85	-20		85	°C
Storage Temperature	10 °C/ minute max. allowable	-35		85	-35		85	°C
Soldering Temperature	5 sec. dwell			260			260	°C
Please note: The indicated electrical data are maximum values and can vary downwards when using a more sensitive switch. ** These ranges refer to the uncut / unmodified Reed Switches described in our Reed Switch section. Consult factory if more detail is required.								