


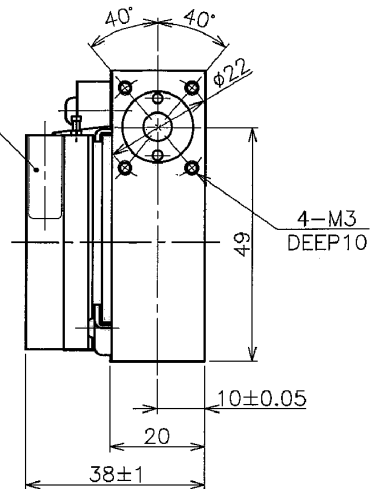


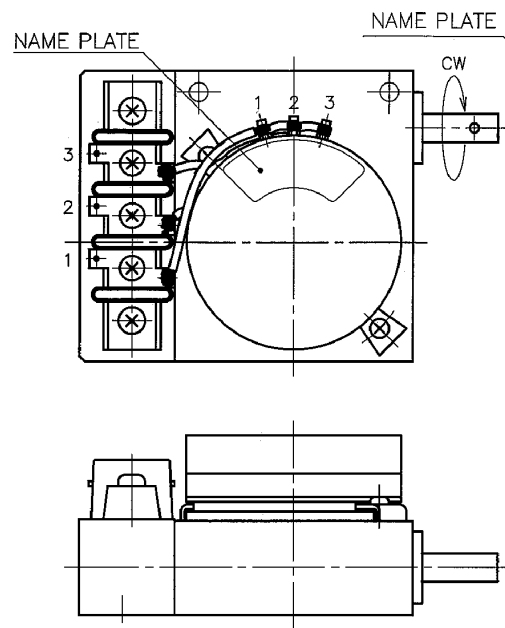

SCHEMATIC



GEAR RATIO : 10 : 1
BACKLASH : 0.03% MAX.
TORQUE : 3.9 mN·m MAX.

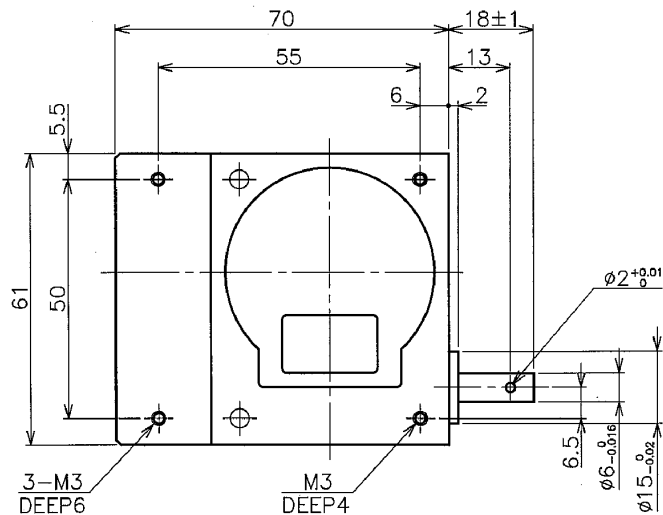

SPECIFICATIONS (CPP-45)

ELECTRICAL TRAVEL : 350°
TOTAL RESISTANCE : 0.5 · 1 · 2 · 5 · 10 · 20kΩ ± 15%
INDEPENDENT LINEARITY : ± 0.5% (AVAILABLE ± 0.1%)
POWER RATING : 3W / 70°C
INSULATION RESISTANCE : 100MΩ MIN. DC1000V
DIELECTRIC STRENGTH : AC1000V 1MINUTE
TEMPERATURE COEFFICIENT OF RESISTANCE : ± 400ppm/°C
OUTPUT SMOOTHNESS : 0.1% MAX.
MECHANICAL TRAVEL : 360° CONTINUOUS

DRAWING FOR APPROVAL				SPEC. NO.	
MODEL: CPP-45-10SX-SC					
APPROVED	TOLERANCE	DATE	3. 6. '01	MIDORI PRECISIONS CO., LTD.	
CHECKED	SCALE	1 / 1		DRAWING NO.	
DRAWN	ANGLE	± 1.5°		A-MPE-B32	
3. 6. '01					

REV	DATE	DESCRIPTION	DRAWN	CHKD
△				