





fscb50a 5k + S -



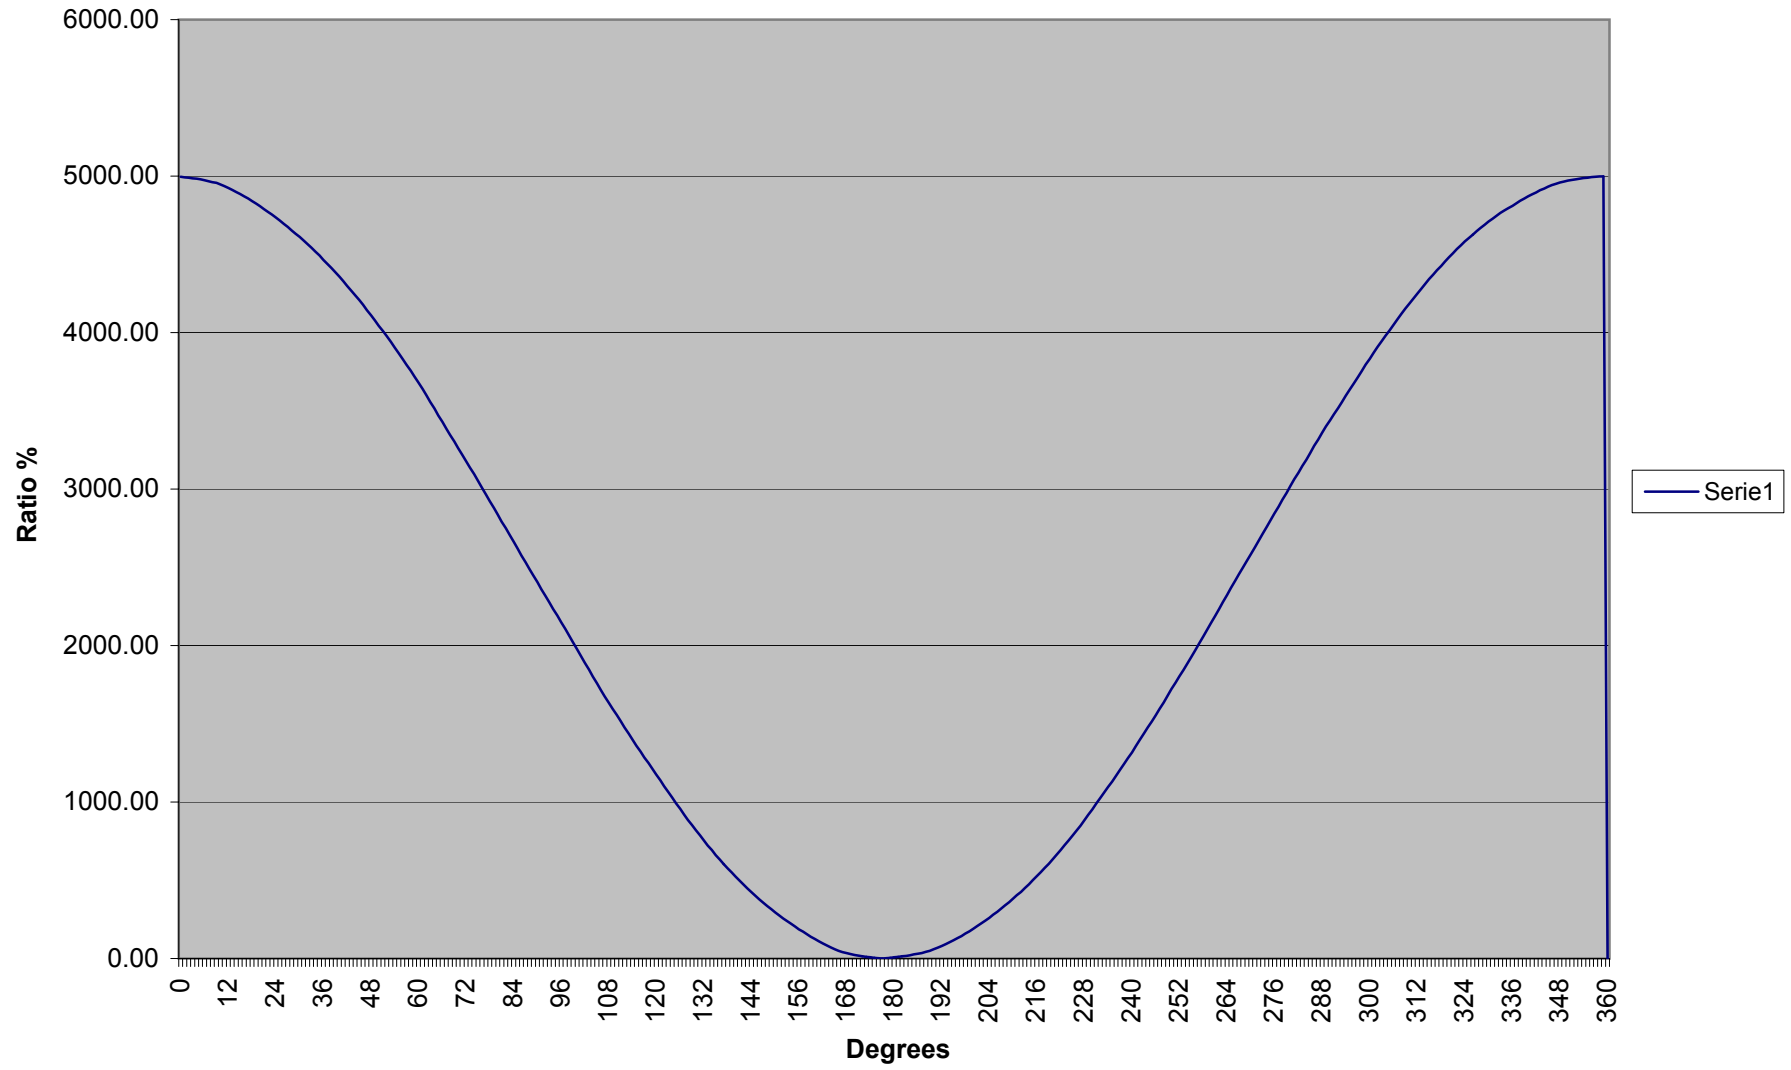


fscb50a 5k + C -

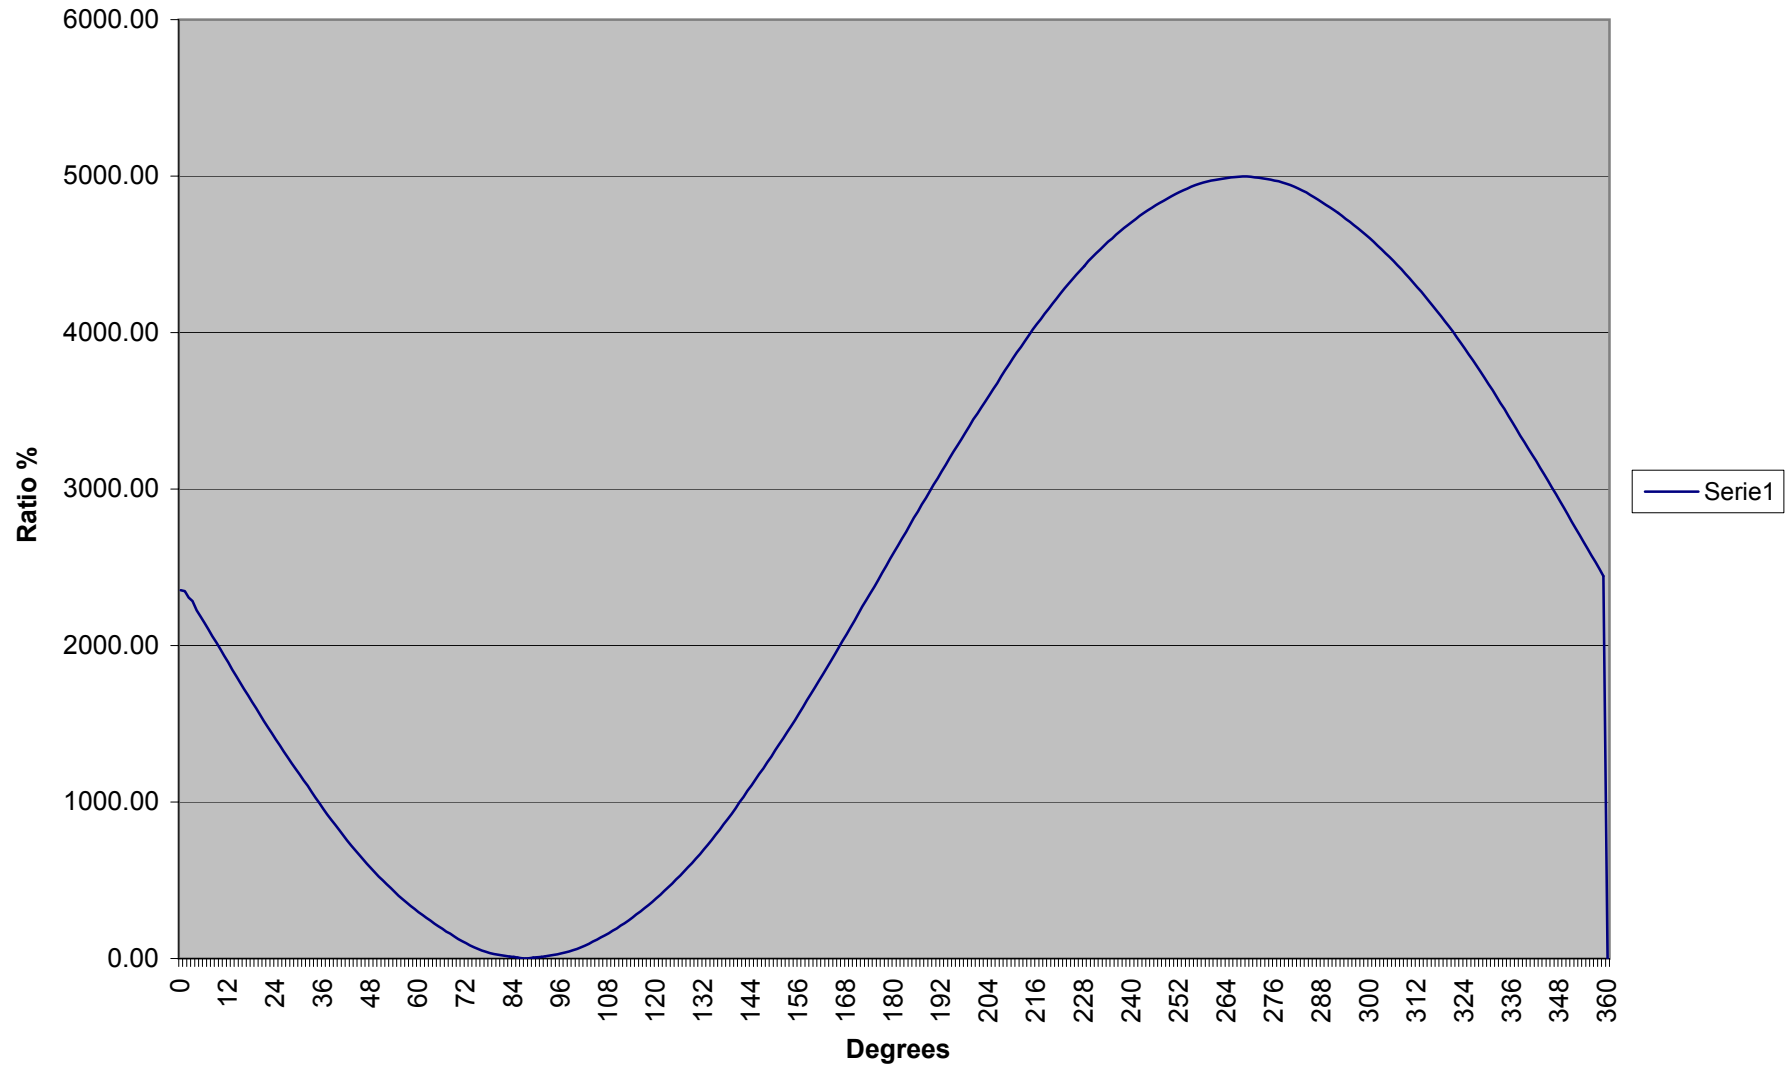



fscb50a 5k + S -

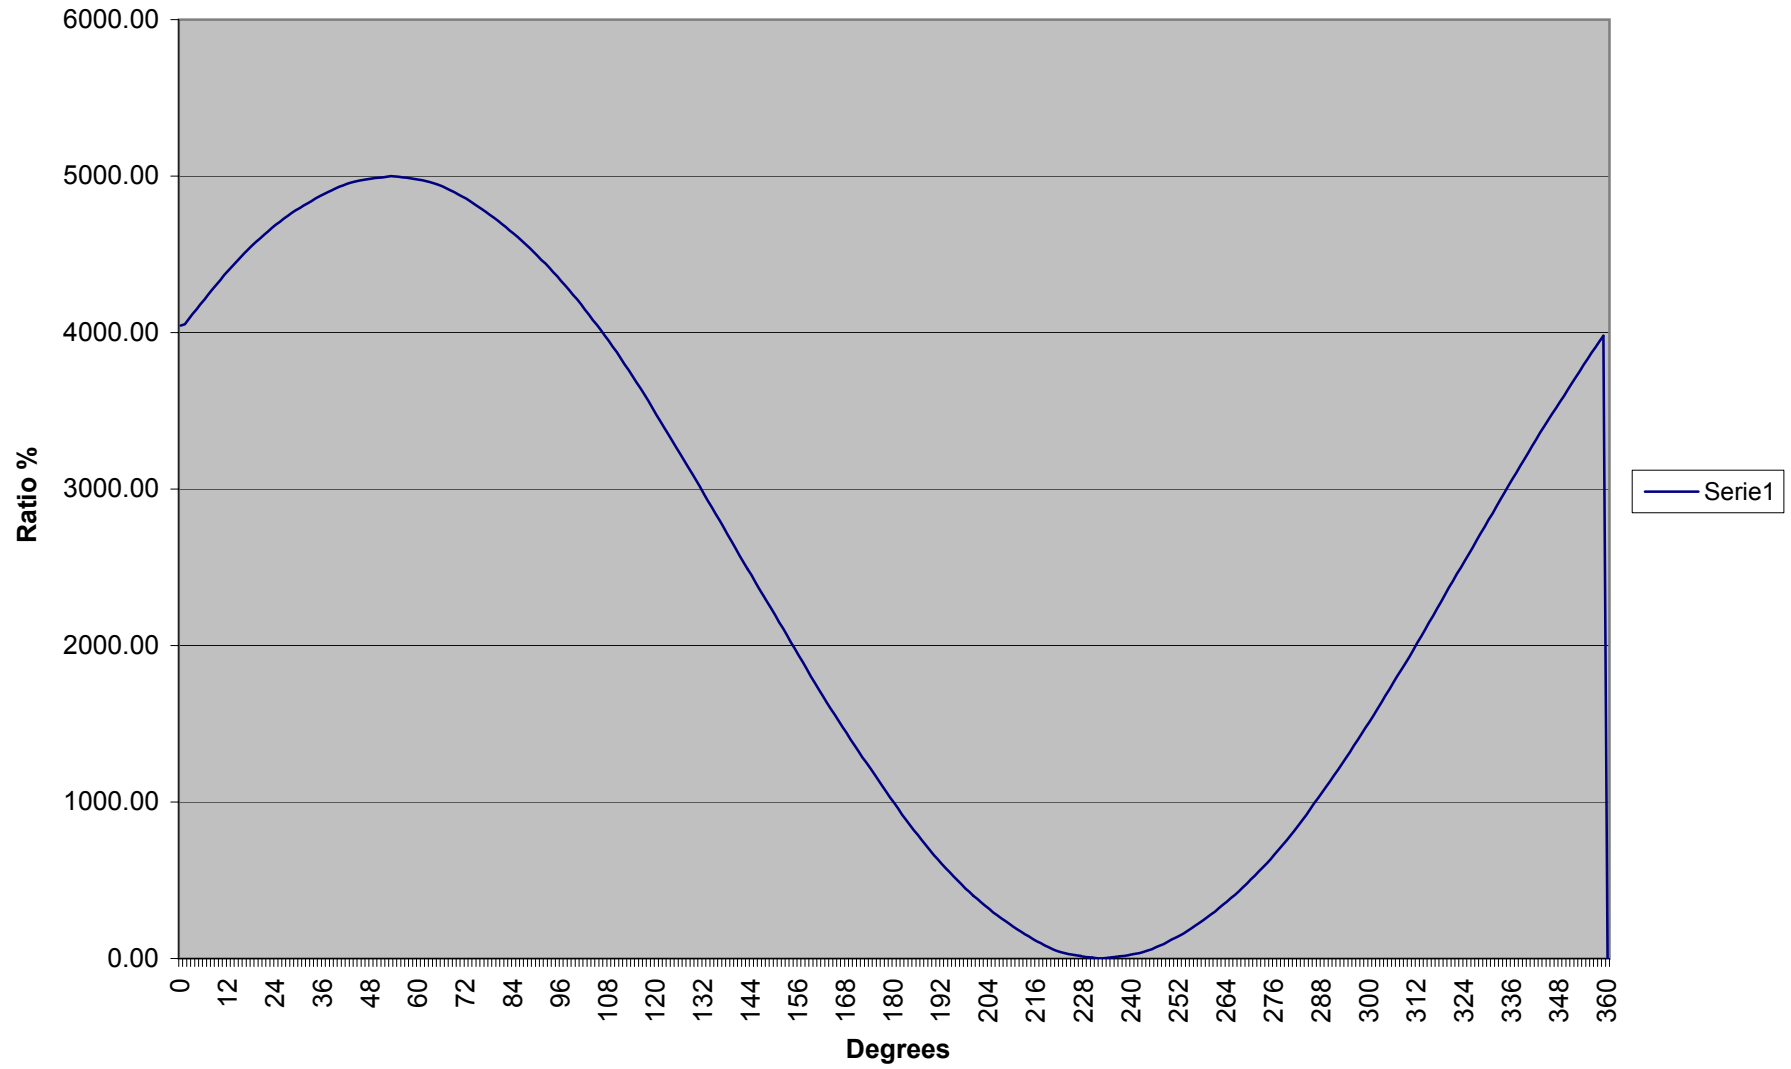




NON-LINEAR POTENTIOMETER

(Precision 1-turn, Wirewound & Conductive Plastic Element)


A precise detection of Sine-Cosine and other Non-Linear function voltage can be obtained through the shaft revolution of **SAKAE Non-Linear Potentiometer Series**. There are 2 kinds of resistive element in this series:

traditional wirewound with high stability and newest conductive plastic featuring long life expectancy and high speed tracking ability.

THE NOMENCLATURE OF SAKAE NON-LINEAR POT. SERIES

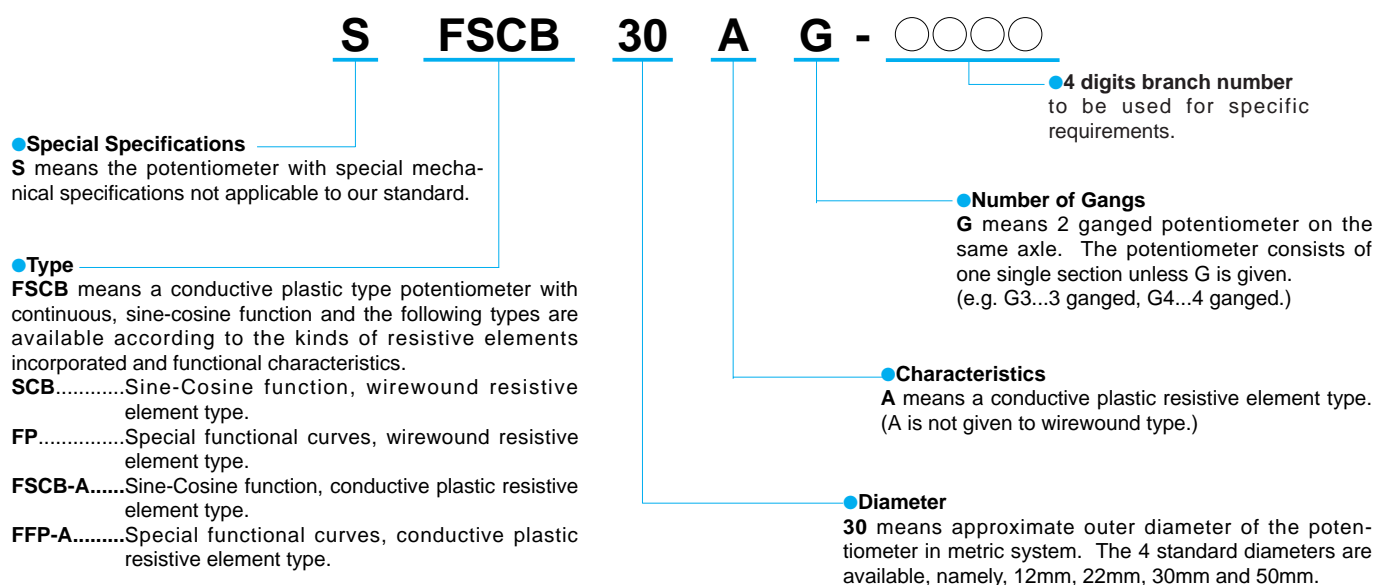

Examples of Non-Linear Function Curves

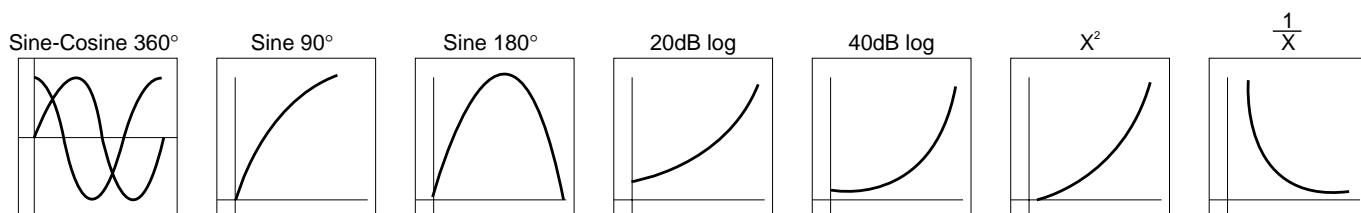

SELECTION GUIDE

Function Characteristics	Kind of Element	Model No.	Features
Sine-Cosine	Wirewound	SCB50	Most popular precision pot. with sine-cosine output.
	Conductive Plastic	FSCB22A, FSCB30A, FSCB50A	Conductive plastic resistive element pot. with essentially infinite resolution and long life expectancy, using a patented multifinger contact.
Special Functional Curves	Wirewound	FP50	Various kinds of special functions are available in this series.
	Conductive Plastic	FFP12A, FFP22A	Various kinds of special functions are available in this series with smaller diameter.

● General Performances

Kind of Element	Model No.	Function Characteristics	Standard Total Resistance Range (Ω)	Special Resistance Values (Ω)	Conformity Tolerance (Peak-Peak) (%)	Special Specifications					
						With Stopper	Front and Rear Shaft Extension	Extra Taps	Simple Sealing Type	With-Switch	Multi-ganged
Wirewound	SCB50	Sin-Cos	500~10k	—	$\pm 1.0 \sim \pm 0.5$	—	○	—	○	—	○
	FP50	$X^2, \frac{1}{X}$, etc.	500~10k	—	$\pm 5.0 \sim \pm 0.5$	○	○	○	○	○	○
Conductive Plastic	FSCB22A	Sin-Cos	1k~10k	500, 20k, 50k	$\pm 2.0 \sim \pm 1.0$	—	○	—	○	—	○
	FSCB30A	Sin-Cos	1k~10k	500, 20k, 50k	$\pm 1.0 \sim \pm 0.7$	—	○	—	○	—	○
	FSCB50A	Sin-Cos	1k~10k	20k, 50k, 100k	$\pm 0.5 \sim \pm 0.2$	—	○	—	○	—	○
	FFP12A	Sin 360° $\frac{1}{X^2}, \frac{1}{X}$, etc.	1k~10k	—	$\pm 5.0 \sim \pm 2.0$	—	○	○	○	—	—
	FFP22A	Sin 180° $\frac{1}{X^2}, \frac{1}{X}$, etc.	1k~10k	—	$\pm 5.0 \sim \pm 1.0$	○	○	○	○	—	○

Note: 1. For detailed performances, please refer to specifications of each model in this catalog.

● Environmental Performances



Model Nos.	SCB50, FP50	FSCB22A, FSCB30A, FSCB50A, FFP12A, FFP22A
Operating Temperature Range	-55°C ~ +105°C	-55°C ~ +105°C
Temperature Cycle	5 cycles under -55°C ~ +105°C Total resistance value variation: below $\pm 5\%$ No mechanical damage	5 cycles under -55°C ~ +105°C Total resistance value variation: below $\pm 10\%$ No mechanical damage
Exposure at Low Temperature	24 hours at -55°C Total resistance value variation: below $\pm 5\%$ No mechanical damage	24 hours at -55°C Total resistance value variation: below $\pm 5\%$ No mechanical damage
Exposure at High Temperature	1,000 hours at 105°C Total resistance value variation: below $\pm 5\%$ No mechanical damage	1,000 hours at 105°C Total resistance value variation: below $\pm 10\%$ No mechanical damage
Vibration	10Hz to 2,000Hz 147m/s ² 12 hours Total resistance value variation: below $\pm 5\%$ No mechanical and electrical damage	10Hz to 2,000Hz 147m/s ² 12 hours Total resistance value variation: below $\pm 2\%$ No mechanical and electrical damage
Shock	490m/s ² 11ms 18 times Total resistance value variation: below $\pm 1\%$ No mechanical and electrical damage	490m/s ² 11ms 18 times Total resistance value variation: below $\pm 1\%$ No mechanical and electrical damage
Moisture Resistance	40°C 95%RH 240 hours Total resistance value variation: below $\pm 10\%$ Insulation resistance: over 10M Ω	40°C 95%RH 120 hours Total resistance value variation: below $\pm 10\%$ Insulation resistance: over 10M Ω
Rotational Life Expectancy (at 25°C)	No load at 40 r.p.m. 1,000,000 shaft revolutions Total resistance value variation: below $\pm 5\%$ against initial value Conformity tolerance: below 150% of specified value Noise: below 500 Ω E.N.R.	No load at 400 r.p.m., inverting every 15 minutes FSCB-A...50,000,000 shaft revolutions FFP-A...10,000,000 shaft revolutions Total resistance value variation: below $\pm 10\%$ against initial value Conformity tolerance: below 150% of specified value Output smoothness: below 150% of specified value

Note: 2. In case of the potentiometer with special resistance values and special specifications, the above performances may change and therefore, please consult us in advance, separately.

3. As for operating temperature range, we can not guarantee that all values of performances can satisfy within this operating temperature range. (Please see page 24 in this catalog for further details.)

4. The above values of performances based on each testings were measured after each testings completed, respectively, under standard conditions. As for the values during testings and other values not mentioning in the above table, please ask us separately.

● Standard Dimensions

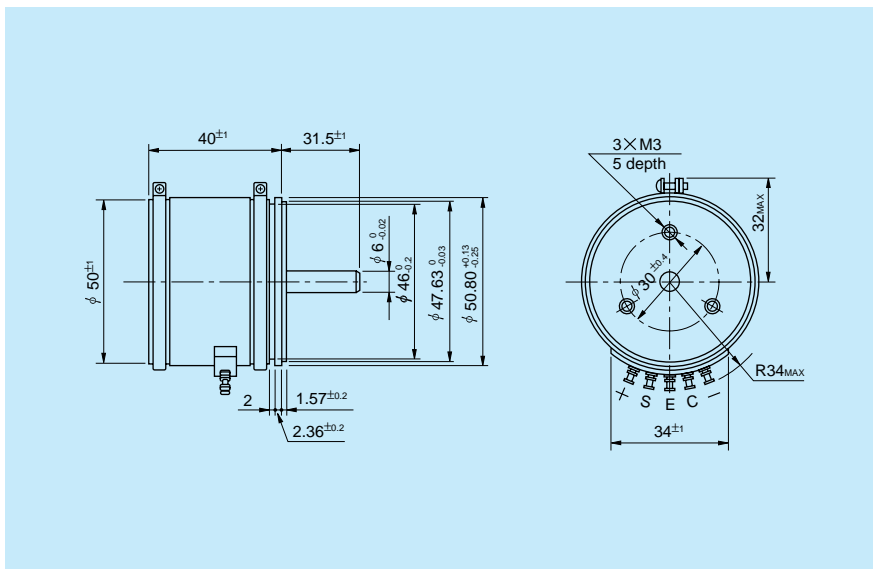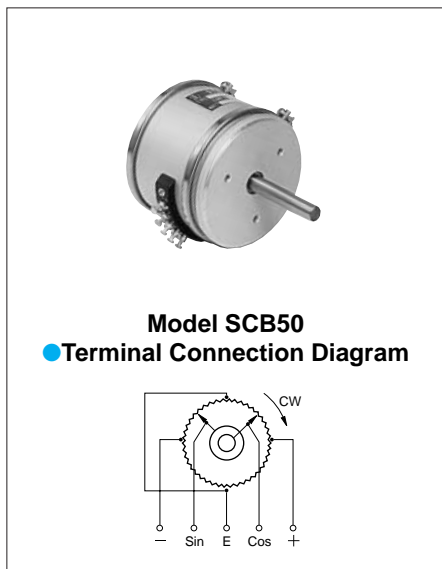

● General Specifications

Standard Resistance

Range: 500Ω to 10kΩ
Max. Practical Resistance Value: 20kΩ
Total Resistance Tolerance: Standard Class $\pm 5\%$ (J)
 Precision Class $\pm 3\%$ (H)

Conformity

Tolerance: Standard Class $\pm 1.0\%$
 Precision Class $\pm 0.5\%$
(Peak-Peak)
Power Rating: 2.0W
Noise: Below 100Ω E.N.R.

Electrical Travel: 360° (Endless)
Mechanical Travel: 360° (Endless)
Insulation Resistance: Over 1,000MΩ at 1,000V.D.C.
 1 minute at 1,000V.A.C.
Dielectric Strength: Below 11mN•m (110gf•cm)
Starting Torque: 250V
Max. Working Voltage: 250V
Resist. Temperature Coefficient of Wire: ± 20 p.p.m./°C
Mass: Approx. 160g

● Standard Resistance Values ■ No. of Wire Turns ■ Resistance Wire Used



Resist. Value (Ω)	500	1k	2k	5k	10k	※ 20k
No. of Wire Turns	1,000	1,400	1,800	1,800	2,000	2,500
Resist. Wire Used	Cu-Ni System			Ni-Cr System		

Note: Mark ※ shows value at special higher practical resistance.

● Special Specifications Available

Multi-ganged (Available up to 3 gangs. Housing length is extended by 30mm per 1 gang), Shaft with front and rear extension (Rear shaft with 6mm dia. and 15mm length), Bushingmount type, Shaft dia. (Ø6.35mm) with inch dimensions, Special machining on the shaft, Oil-filled type.

● Standard Dimensions

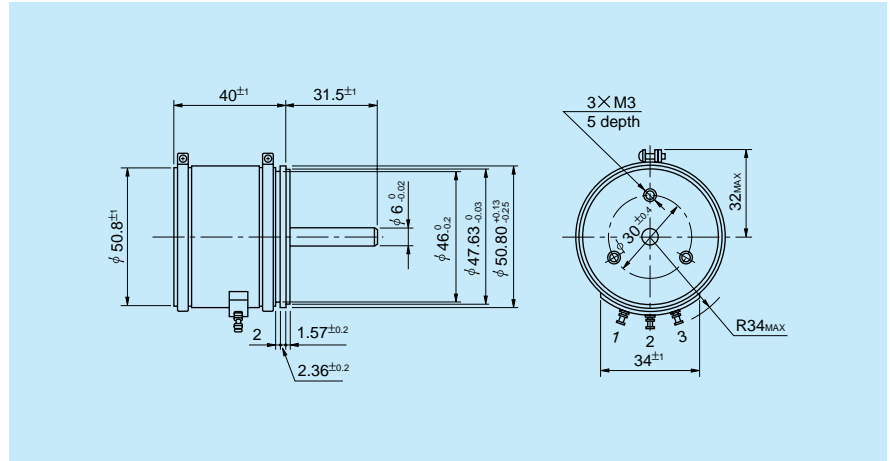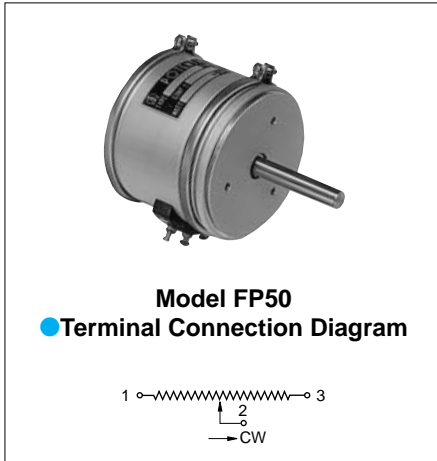


● General Specifications


Standard Resistance Range:	500Ω to 10kΩ	Noise:	Below 100Ω E.N.R.
Total Resistance Tolerance:	Standard Class ±10% (K) Precision Class ±5% (J)	Electrical Travel:	300° ±3°
Function Characteristics (Examples):	20dB log, Sine 90°, Sine 180°, Tan 45° X ² (0 ≤ X ≤ 1) 1/X (1 ≤ X ≤ 10)	Mechanical Travel:	360° (Endless)
Power Rating:	1.5W	Insulation Resistance:	Over 1,000MΩ at 1,000V.D.C.
Conformity Tolerance (Peak-Peak):	Standard Class ±5% Precision Class ±3% Super-precision Class ±1%	Dielectric Strength:	1 minute at 1,000V.A.C.
		Starting Torque:	Below 8mN•m (80gf•cm)
		Max. Working Voltage:	250V
		Resist. Temperature Coefficient of Wire:	±20p.p.m./°C
		Mass:	Approx. 160g

● Special Specifications Available

Extra taps (Available up to 5 taps), Multi-ganged (Available up to 3 gangs. Housing length is extended by 30mm per 1 gang), Shaft with front and rear extension (Rear shaft with 6mm dia. and 15mm length), Bushingmount type, With stopper (Rotating angle becomes 330° and stopper strength is 0.9N•m [9kgf•cm]), Special electrical travel, Shaft dia. (Ø6.35mm) with inch dimensions, Special machining on the shaft, Oil-filled type.

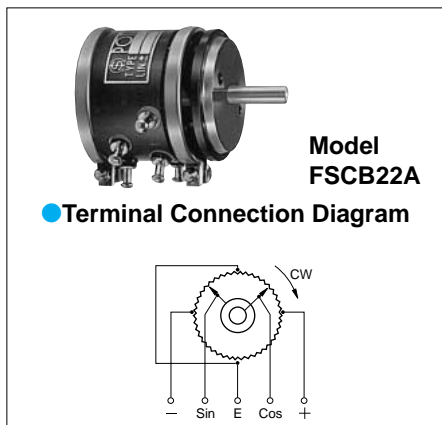

● Standard Dimensions

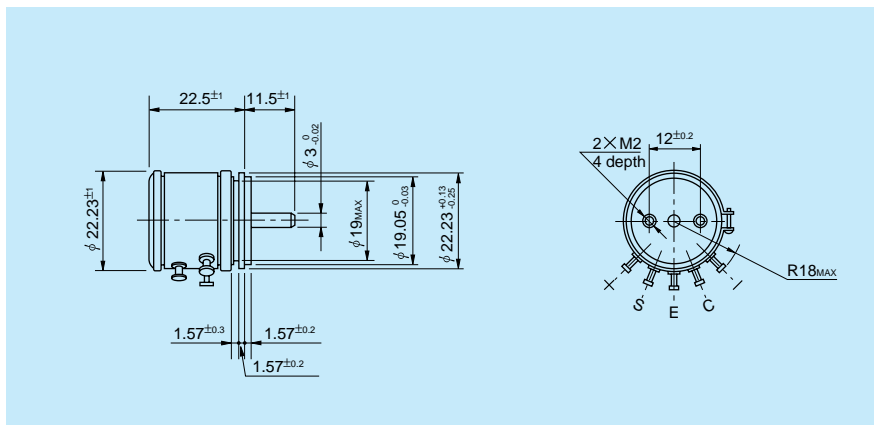


● General Specifications


Standard Resistance Values:	1k, 2k, 5k, 10k (Ω)	Power Rating:	0.5W
Special Practical Resistance Values:	500, 20k, 50k (Ω)	Electrical Travel:	360° (Endless)
Total Resistance Tolerance:	Standard Class $\pm 15\%$ (L) Precision Class $\pm 10\%$ (K)	Mechanical Travel:	360° (Endless)
Conformity Tolerance:	Standard Class $\pm 2.0\%$ Precision Class $\pm 1.0\%$	Insulation Resistance:	Over 1,000M Ω at 500V.D.C.
Resolution:	Essentially infinite	Dielectric Strength:	1 minute at 500V.A.C.
Output Smoothness:	Below 0.1% against input voltage	Starting Torque:	Below 3mN·m (30gf·cm)
Contact Resistance Variation:	Below 8% C.R.V.	Max. Working Voltage:	250V
		Resist. Temperature Coefficient:	± 400 p.p.m./°C
		Mass:	Approx. 20g

● Special Specifications Available

Multi-ganged (Available up to 3 gangs. Housing length is extended by 16mm per 1 gang), Shaft with front and rear extension (Rear shaft with 3mm dia. and 10mm length), Shaft dia. ($\varnothing 3.175$ mm) with inch dimensions, Special machining on the shaft, Oil-filled type.

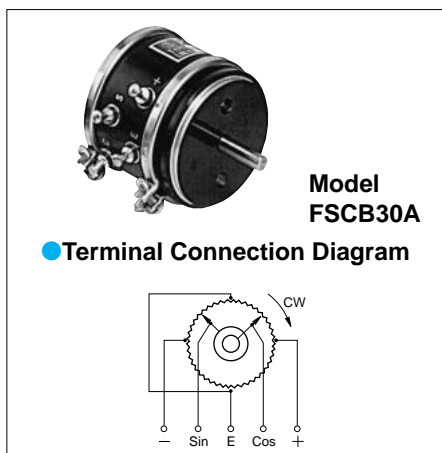

● Standard Dimensions

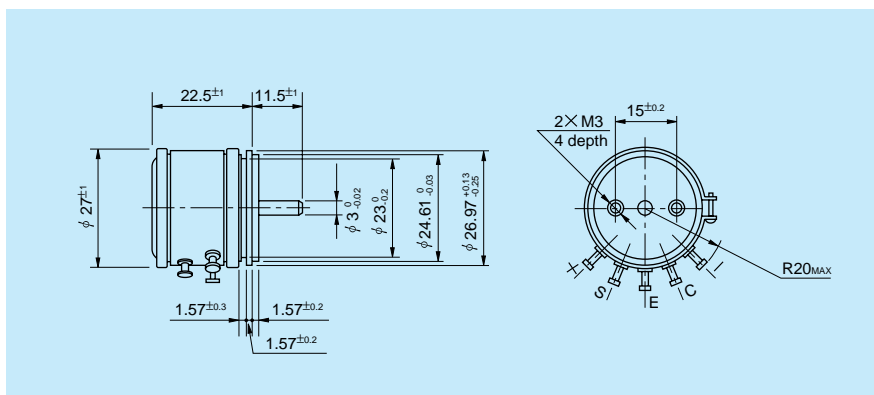

● General Specifications

Standard Resistance

Values: 1k, 2k, 5k, 10k (Ω)

Special Practical

Resistance Values: 500, 20k, 50k (Ω)

Total Resistance

Tolerance: Standard Class ±15% (L)
Precision Class ±10% (K)

Conformity

Tolerance: Standard Class ±1.0%

(Peak-Peak) Precision Class ±0.7%

Resolution: Essentially infinite

Output Smoothness: Below 0.1% against input voltage

Contact Resistance

Variation: Below 8% C.R.V.

Power Rating: 0.75W

Electrical Travel: 360° (Endless)

Mechanical Travel: 360° (Endless)

Insulation Resistance: Over 1,000MΩ at 500V.D.C.

Dielectric Strength: 1 minute at 500V.A.C.

Starting Torque: Below 3mN•m (30gf•cm)

Max. Working Voltage: 250V

Resist. Temperature

Coefficient: ±400p.p.m./°C

Mass: Approx. 30g

● Special Specifications Available



Multi-ganged (Available up to 3 gangs. Housing length is extended by 16mm per 1 gang), Shaft with front and rear extension (Rear shaft with 3mm dia. and 10mm length), Shaft dia. (Ø3.175mm) with inch dimensions, Special machining on the shaft.

Conductive Plastic

MODEL FSCB50A

(Servomount)

● Standard Dimensions

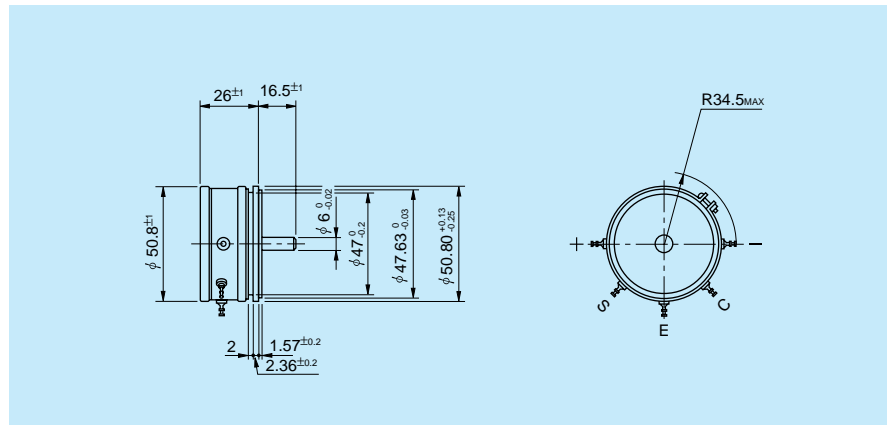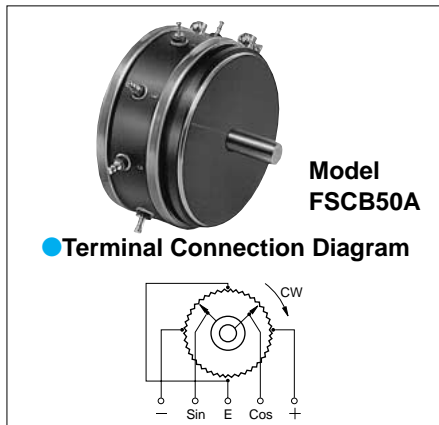

● General Specifications

Standard Resistance

Values: 1k, 2k, 5k, 10k (Ω)

Special Higher

Practical Resistance

Values: 20k, 50k, 100k (Ω)

Total Resistance

Tolerance: Standard Class ±15% (L)
Precision Class ±10% (K)

Conformity Tolerance:

(Peak-Peak) Standard Class ±0.5%

Precision Class ±0.3%

Super Precision Class ±0.2%

Resolution: Essentially infinite

Output Smoothness: Below 0.1% against input voltage

Contact Resistance

Variation: Below 8% C.R.V.

Power Rating: 1.25W

Electrical Travel: 360° (Endless)

Mechanical Travel: 360° (Endless)

Insulation Resistance: Over 1,000MΩ at 1,000V.D.C.

Dielectric Strength: 1 minute at 1,000V.A.C.

Starting Torque: Below 5mN•m (50gf•cm)

Max. Working Voltage: 250V


Resist. Temperature

Coefficient: ±400p.p.m./°C


Mass: Approx. 120g

● Special Specifications Available

Multi-ganged (Available up to 3 gangs. Housing length is extended by 17mm per 1 gang), Shaft with front and rear extension (Rear shaft with 6mm dia. and 15mm length), Bushingmount type, Shaft dia. (Ø6.35mm) with inch dimensions, Special machining on the shaft, Oil-filled type.

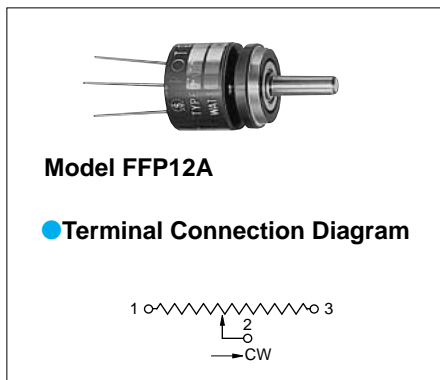

● Standard Dimensions

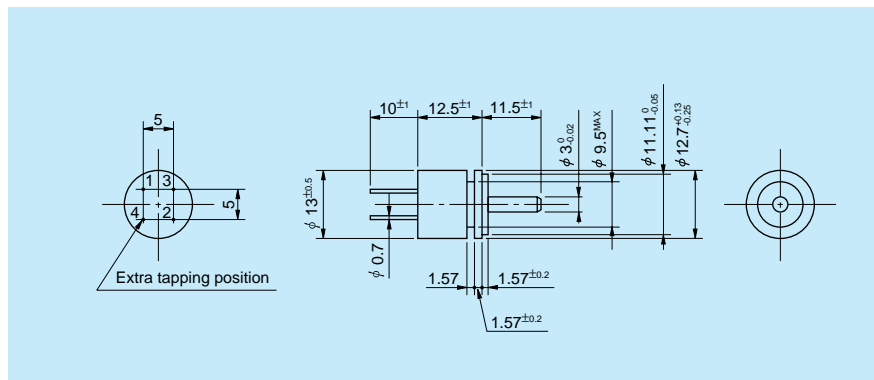

● General Specifications

Standard Resistance

Values: 1k, 2k, 5k, 10k (Ω)

Total Resistance

Tolerance: Standard Class ±15% (L)
Precision Class ±10% (K)

Function

Characteristics: Sine 360° , 20dB log,
X² (0 ≤ X ≤ 1)
1/X (1 ≤ X ≤ 10)

Conformity

Tolerance: Standard Class ±10%
Precision Class ±5%

(Peak-Peak)

Resolution: Essentially infinite

Output Smoothness:

Below 0.1% against input voltage

Power Rating:

0.2W

Electrical Travel:

300° ±5°
(360° in case of Sine 360°)

Mechanical Travel:

360° (Endless)

Insulation Resistance:

Over 1,000MΩ at 500V.D.C.

Dielectric Strength:

1 minute at 500V.A.C.

Starting Torque:

Below 1mN•m (10gf•cm)

Resistance

Temperature

Coefficient:


±400p.p.m./°C

Mass:


Approx. 5g

● Special Specifications Available

Extra taps (Available up to 1 tap), Shaft with front and rear extension (Rear shaft with 1mm dia. and 10mm length), With stopper (Rotating angle becomes 310° and stopper strength is 0.3N•m [3kgf•cm]), Special electrical travel, Shaft dia. (∅3.175mm) with inch dimensions, Special machining on the shaft, Special functions, Bushingmount type (Same dimensions as FCP12AC).

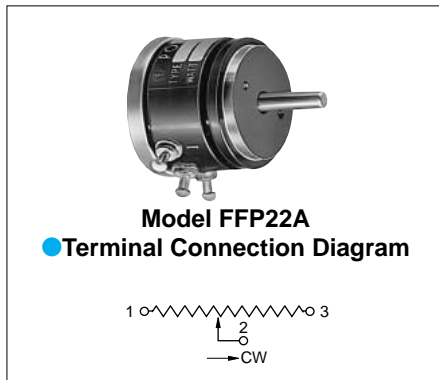

● Standard Dimensions

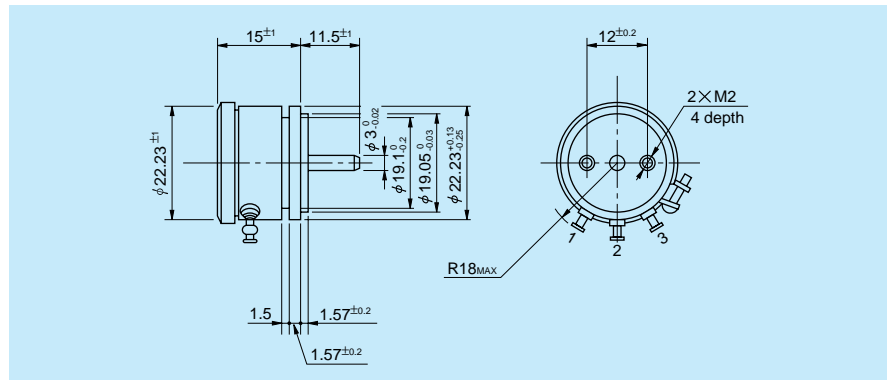

● General Specifications

Standard Resistance

Values: 1k, 2k, 5k, 10k (Ω)

Total Resistance

Tolerance: Standard Class ±15% (L)
Precision Class ±10% (K)

Function

Characteristics: Sine 90°, Sine 180°, 20dB log,
X² (0 ≤ X ≤ 1)
1/X (1 ≤ X ≤ 10)

Conformity

Tolerance: Standard Class ±5%
(Peak-Peak) Precision Class ±2%

Resolution:

Essentially infinite

Output Smoothness: Below 0.1% against input voltage

Power Rating: 0.5W

Electrical Travel: 300° ±5°

Mechanical Travel: 360° (Endless)

Insulation Resistance: Over 1,000MΩ at 500V.D.C.

Dielectric Strength: 1 minute at 500V.A.C.

Starting Torque: Below 3mN·m (30gf·cm)

Resistance

Temperature

Coefficient: ±400p.p.m./°C

Mass: Approx. 20g


● Special Specifications Available

Extra taps (Available up to 1 tap), Shaft with front and rear extension (Rear shaft with 3mm dia. and 10mm length), With stopper (Rotating angle becomes 300° and stopper strength is 0.3N·m [3kgf·cm]), Special electrical travel, Shaft dia. (Ø3.175mm) with inch dimensions, Special machining on the shaft, Special functions.

SPECIALLY ORDERED ITEM

The following item discontinues to manufacture as our standard items and however, we can manufacture them as specially ordered items.

Model SCA30 (Wirewound)
(1-turn Sine-Cosine Pot.)



- Standard Resistance Range : 50Ω ~ 20kΩ
- Total Resistance Tolerance : ±10% (K)
- Conformity tolerance (Peak-Peak) : ±3.0%
- Power Rating : 1W
- Noise : Below 100Ω E.N.R.
- Electrical travel : 360° (Endless)
- Mechanical travel : 360° (Endless)
- Mass : Approx. 25g