

**Setting big things
into motion.**

**Industrial Controllers
Catalog 2015**





Tool for Designers, Engineers and Purchasing Agents

Your tool for finding industrial controllers for cranes, electro-hydraulic systems, floor conveyors, industrial applications, ships, rail vehicles, and construction machinery of any kind, joysticks and masterswitches with electronic interface adjustment for all machines matching our product portfolio. Take advantage of our **fold-out order tool** on this page and the **detailed tables of contents** at the beginning of each position.

Product range

Multi-axis controller
Double-handle controller
Single-axis controller
Control switch
Standard contact-arrangement
Technical data

1

Potentiometer
HG 1
OEC 2
OEC 4
Electronic control unit
MATRIX grip
Hall-push button
Palm grip
Housing

2

Crane control unit
Driver seat
Ordering information
Portable control unit
Control pedestal for offshore

3

Naval cruise controller
Pedal-controller
Gear limit switch
DC-contact
Signal-cam controller

4

As of
2015

Product Portfolio

Gessmann is an international market leader. Our success in the market is based upon our decisive focus on innovative product development and the highest possible standards when it comes to quality. Our product range includes:

- Multi-axis controller, double-handle controller, control switch (master-switch), gear limit switch for hoisting, electro-hydraulic application, material-handling technology and remote control
- Geared limit switch for joisting equipment
- Complete crane control unit, portable control unit, pendant control unit, including wiring for all types of cranes, vehicles and industrial applications
- Operating panels for construction machinery, industrial applications, vehicles and harvesting machines
- Control pedestals, ship-operating transmitters, sensor units and actual-value transmitters for ship drives
- Pedal controllers for welding machines, road and rail vehicles
- Master controllers, panels and control stations for rail vehicles
- Displays for forklifts and construction machinery
- Proportional control electronics for solenoid valves
- Interface electronics with digital and analog outputs matching our controllers
- Interface electronics with Profibus interface or CAN-bus interface matching our controllers (input/output cards)
- DC controllers, selector switches (signal controllers) for high-voltage systems
- Customized solutions for operating devices and electronic units for any type of machinery and vehicles

Management certification:

Multi-axis controller	V6 / VV6	S. 1-5
	V11	S. 6-9
	V8 / VV8	S. 10-13
	V85 / VV85	S. 14-22
	V24	S. 23-26
	V25	S. 27-32
	V14	S. 33-36
	V20	S. 37-38
	V22	S. 39-40
	V23	S. 41-42
	V21	S. 43-44
Double-handle controller	D64 / DD64	S. 45-49
	D8	S. 50-53
	D85	S. 54-59
	D3	S. 60-64
Single-axis controller	S1	S. 65-67
	S11	S. 68-71
	S14	S. 72-74
	S2 / SS 2 / S21	S. 75-79
	S22 / SS22	S. 80-83
	S23	S. 84-86
	S26	S. 87-90
	S27	S. 91-94
	S3	S. 95-98
	S9	S. 99-100
Control switch	N6	S. 101-103
	N9	S. 104-105
Standard contact-arrangement		S. 106-107
Technical data		S. 108-109
Potentiometer		S. 110
HG 1		S. 111-112
OEC 2		S. 113-115
OEC 4		S. 116
Electronic control unit		S. 117-118
MATRIX grip		S. 119
Hall-push button		S. 120-122
Palm grip	B1	S. 123-124
	B2	S. 125-126
	B3	S. 127-129
	B5	S. 130-131
	B6	S. 132-133
	B7 / B8	S. 134-135
	B9	S. 136-137
	B10	S. 138-139
	B14 / B15	S. 140-141
	B20	S. 142-143
	B22	S. 144-145
	B23	S. 146-147
	B24	S. 148-149
	B25	S. 150-151
	B28	S. 152-153
	B29	S. 154-155

Housing		S. 156-157
Crane control unit	KST 4	S. 158-160
	KST 5	S. 161-163
	KST 6	S. 164-166
	KST 7 / KST 75	S. 167-169
	KST 8	S. 170-172
	KST 85	S. 173-174
	KST 10	S. 175-177
	KST 19	S. 178-180
Driver seat	KFS 2	S. 181-182
	KFS 4	S. 183-184
	KFS 82	S. 185-186
	KFS 9	S. 187-188
	KFS 10	S. 189-190
	KFS 11	S. 191-192
	KFS 12	S. 193-194
Ordering information		S. 195-199
Portable control unit	TS 1	S. 200-202
	TS 2	S. 203-205
Control pedestal for offshore	U 22/32	S. 206-208
	U 23/23	S. 209-211
Naval cruise controller	AZ 1	S. 212-213
Pedal-controller	P7 / PP7	S. 214-215
	P8 / PP8	S. 216-217
	P10 / P11 / P12	S. 218-219
Gear limit switch	GE 1/2	S. 220-222
DC-contact	SO / SS	S. 223-224
Signal-cam controller	NU 1	S. 225-227



General Terms and Conditions



For our general conditions for sale and delivery please refer to our website at www.gessmann.com

Please also note:

Our catalog prices do not include value added tax, which is added separately.

The prices are ex-works in Leingarten excluding packaging. Packaging is charged at cost and cannot be returned. For orders below EURO 150.00 our gross prices are applicable. The minimum invoice amount is EURO 80.00, regardless of the value of the delivered goods. Therefore, we recommend combining small orders.

We are entitled to pass on any additional handling and production costs resulting from modifications to the order caused or requested by the customer (both technical modifications and non-compliance with deadlines).

Our periods of payment are: 30 days without a discount.

These conditions of payment shall be deemed agreed and accepted upon receipt of our written confirmation of orders.

All delivered goods shall remain our sole and absolute property until full payment is received.

The delivery period only commences upon clarification of all technical details. Unforeseen circumstances justify an appropriate extension of the delivery period. All documents, such as drawings, dimensional drawings, circuit diagrams, etc., are non-binding. We reserve the right to make any changes necessary, in particular changes which serve the technical advancement.

The exclusive place of jurisdiction is 74072 Heilbronn, Germany.



Warning

Certain parts of this electrical device carry hazardous voltages when in operation.
Installation, maintenance, modification or retrofitting may only be carried out by qualified personnel in consideration of the appropriate safety precautions.
Non-compliance may result in death, severe injuries or substantial property damage.

W. Gessmann GmbH

**P/O Box 11 51
74207 Leingarten
GERMANY**

**Eppinger Straße 221
74211 Leingarten
GERMANY**

**Phone +49 (0) 7131 40 67-0
Fax +49 (0) 7131 40 67-10**

**gessmann@gessmann.com
www.gessmann.com**

Bank details

Deutsche Bank Heilbronn (BLZ 620 700 81) account-no.: 01 94 605
SWIFT-Code: DEUT DE SS 620 · IBAN-Code: DE 14 620 700 81 0019460500
Kreissparkasse Heilbronn (BLZ 620 500 00) account-no.: 4776
SWIFT-Code: HE IS DE 66 · IBAN-Code: DE 22 620 500 000 0004776
Landesbank Baden-Württemberg (BLZ 620 501 01) account-no.: 74 06 50 56 07
SWIFT-Code: SOLA DE ST · IBAN-Code: DE 09 600 501 01 74 06 50 56 07

Tax No.: 65205/74401 Finanzamt Heilbronn
Sale tax ID No.: DE 145786508

Commercial Register
Stuttgart HRB 100312

Managing Director:
Alwin Ehrensperger

Multi-axis controller V6 / VV6



The multi-axis controller V6 / VV6 is available in either single-axis or multi-axis options and is a robust controller used commonly in electro-hydraulic applications. The modular design and many possibilities of combination with our handles enables the switching device to be used universally. The V6 / VV6 is resistant to oil, maritime conditions e.g. offshore / vessels, UV radiation typically from the sun.

Technical data

Mechanical life V6	10 million operating cycles
Mechanical life VV6	20 million operating cycles
Operation temperature	-40°C til +60°C
Degree of protection	IP 54 front



1

	V62L	S5	P	T	Example					
					- 01 Z P	+ 03A R C	- A05 P134	+ A110 C01	- X	
Basic unit										
V62L 2-axis left										
Control-handle extended										
S5 -20 mm										
Gate										
P Cross gate										
Grip / palm grip										
T Dead man										
Axis 1 (direction 1-2)										
01 2 Contacts (2A 250V AC15)										
Z Spring return										
P Potentiometer										
Axis 2 (direction 3-4)										
03A 6 Contacts (4A 250V AC15)										
R Friction brake										
C Opto-electronical encoder										
Description axis 1 (direction 1-2)										
A05 Arrangement MS 21										
P134 Potentiometer T396 2x5 kOhm										
Description axis 2 (direction 3-4)										
A110 Arrangement MS 24-0										
C01 OEC 2-1-1										
Special model										
X Special / customer-specific										

Multi-axis controller V6 / VV6

Combination possibilities with our ball handles

B1  S. 128	B3  S. 132	B5  S. 135	B6  S. 137	B10  S. 143	B14 B15  S. 145	B22  S. 149	B24  S. 153	B28  S. 157
---	---	---	---	--	--	--	--	--

V62L S5 P T - 01 Z P + 03A R C - A05 P134 + A110 C01 - X

Basic unit

V61L	1-axis left
V61R	1-axis right
V61.1	1-axis
V64.1	1-axis
V62L	2-axis left
V62R	2-axis right
V64	2-axis

reinforced version

VV61L	1-axis left
VV61R	1-axis right
VV61.1	1-axis
VV64.1	1-axis
VV62L	2-axis left
VV62R	2-axis right
VV64	2 axis

Control-handle extended*

Standard 180 mm

S3	-40 mm
S5	-20 mm
S8	+20 mm

**Only available in combination with handle!*

Gate

P	Cross gate
P X	Special gate

Grip / palm grip


	Knob (standard)
M	Mechanical zero interlock
MN	Mechanical zero interlock (push down)
T	Dead man
MT*	Mechanical zero interlock + dead man
H	Signal button
MH	Mechanical zero interlock + signal button
D	Push button
MD*	Mechanical zero interlock + push button
DV	Flush push button
MDV*	Mechanical zero interlock + flush push button

**Only possible with VV6!*


B... Palm grip B... (see Palm grip page 128)

Attention! When using some handles reduces the deflection angle to 28 degrees!


Identification of the installation variants with switching directions:




V61L/VV61L




V61R/VV61R




V62L/VV62L




V62R/VV62R



V64.1/VV64.1



V61.1/VV61.1



V64/VV64

V62L S5 P T - 01 Z P + 03A R C - A05 P134 + A110 C01 - X

Axis 1: direction 1-2 left / direction 5-6 right

(Standard contacts gold-plated 2A 250V AC15)

01	<input type="checkbox"/> 2 contacts	Standard contact - arrangement see page 106	
02	<input type="checkbox"/> 4 contacts	z.B.	
03	<input type="checkbox"/> 6 contacts	A980	MS 00
04	<input type="checkbox"/> 8 contacts	A05	MS 21
05	<input type="checkbox"/> 10 contacts	A0500	MS 21-00
06	<input type="checkbox"/> 12 contacts	A110	MS 24-0
A = silver contacts (4A 250V AC15)		A99 contact - arrangement according customer request	

Z Spring return

R Friction brake

(P) Possibility of mounting potentiometer and encoder (Gessmann-types)

P	Potentiometer	P131	T396 2x0,5 kOhm	I max. 1 mA
		P132	T396 2x1 kOhm	I max. 1 mA
		P133	T396 2x2 kOhm	I max. 1 mA
		P134	T396 2x5 kOhm	I max. 1 mA
		P135	T396 2x10 kOhm	I max. 1 mA
		More potentiometer on request!		

C Encoder C... Encoder see page 118

If both axis identical, it's enough to describe one axis!
Beispiel A05P134 + A05P134 => A05P134

V62L S5 P T - 01 Z P + 03A R C - A05 P134 + A110 C01 - X

Axis 2: Direction 3-4 left / Direction 7-8 right

(not applicable to V/VV61, V/VV61.1, V/VV64.1)

(Standard contacts gold-plated 2A 250V AC15)

01	<input type="checkbox"/> 2 contacts	Standard contact - arrangement see page 106	
02	<input type="checkbox"/> 4 contacts	z.B.	
03	<input type="checkbox"/> 6 contacts	A980	MS 00
04	<input type="checkbox"/> 8 contacts	A05	MS 21
05	<input type="checkbox"/> 10 contacts	A0500	MS 21-00
06	<input type="checkbox"/> 12 contacts	A110	MS 24-0
A = Silver contacts (4A 250V AC15)		A99 contact - arrangement according customer request	

Z Spring return

R Friction brake

(P) Possibility of mounting potentiometer and encoder (Gessmann-types)

P	Potentiometer	P131	T396 2x0,5 kOhm	I max. 1 mA
		P132	T396 2x1 kOhm	I max. 1 mA
		P133	T396 2x2 kOhm	I max. 1 mA
		P134	T396 2x5 kOhm	I max. 1 mA
		P135	T396 2x10 kOhm	I max. 1 mA
		More potentiometer on request!		

C Encoder C... Encoder see page 118

Multi-axis controller
V6 / VV6



V62L S5 P T - 01 Z P + 03A R C - A05 P134 + A110 C01 - X


Special model	
X	Special / customer-specific

Special model	
	Indicating labels
	Indicating labels with engraving





1

Multi-axis controller V6 / VV6

T = Dead man's button
H = Signal button
M = Latch for mechanical
zero interlock

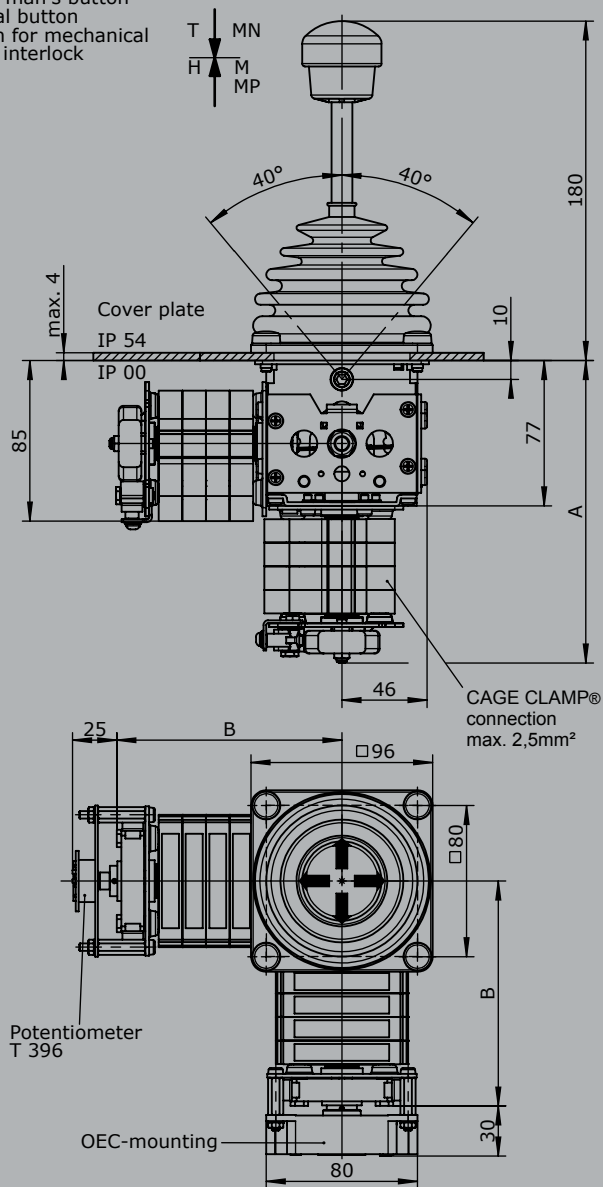

Knob solid
D= Push button

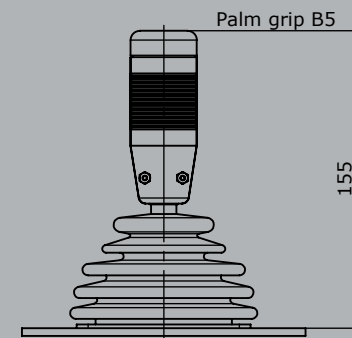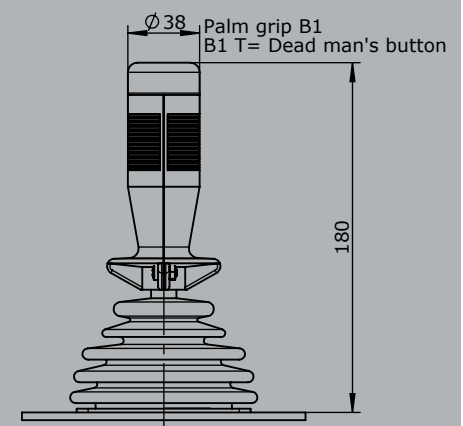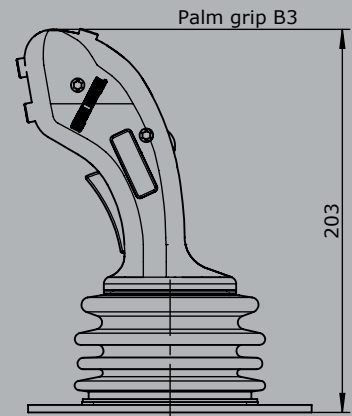

Type	No. of contacts	Dim. A	Dim. B
01	2	119	82
02	4	131	94
03	6	144	107
04	8	156	119
05	10	169	132
06	12	181	144

Multi-axis controller V11



The multi-axis controller V11 is a robust switching device for crane and hoisting applications. The modular design enables the switching device to be used universally. The V11 is resistant to oil, maritime conditions e.g. offshore / vessels, UV radiation typically from the sun.



1 Technical data

Mechanical life	10 million operating cycles
Operation temperature	-40°C til +60°C
Degree of protection	IP 54 front

	V11L	S5	P	T	Example				- A05 P324	+ A110	- X
Basic unit											
V11L 2-axis left											
Control-handle extended											
S5 -20 mm											
Gate											
P Cross gate											
Grip / palm grip											
T Dead man											
Axis 1 (direction 1-2)											
01 2 Contacts (2A 250V AC15)											
Z Spring return											
P Potentiometer											
Axis 2 (direction 3-4)											
03A 6 Contacts (4A 250V AC15)											
R Friction brake											
Description axis 1 (direction 1-2)											
A05 Arrangement MS 21											
P324 Potentiometer T365 2x5 kOhm											
Description axis 2 (direction 3-4)											
A110 Arrangement MS 24-0											
Special model											
X Special / customer-specific											

Multi-axis controller V11

Combination possibilities with our ball handles



V11L S5 P T - 01 Z P + 03A R P - A05 P324 + A110 P325 - X

Basic unit

V11L 2-axis left
V11R 2-axis right
V11.1L 1-axis left
V11.1R 1-axis right

Control-handle extended*

Standard 120 mm
S5 -20 mm
S8 +20 mm

**Only available in combination with handle!*


Gate

P Cross gate
P X Special gate

Grip / palm grip

Knob (included in basic unit!)
M Mechanical zero interlock
MN Mechanical zero interlock (push down)
T Dead man
H Signal button
D Push button
DV Flush push button
B... Palm grip B... (see page palm grip 128)

Identification of the installation variants with switching directions:

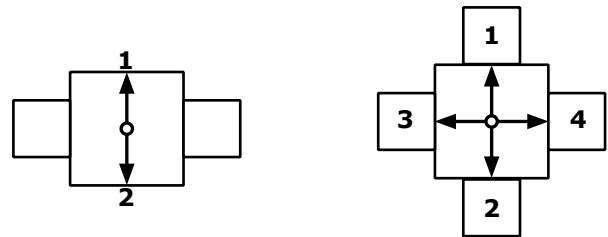

V11.1

V11

V11L S5 P T - 01 Z P + 03A R P - A05 P324 + A110 P325 - X

Axis 1: direction 1-2 left / direction 5-6 right

(Standard contacts gold-plated 2A 250V AC15)

01 ☐ 2 contacts
02 ☐ 4 contacts
03 ☐ 6 contacts

Standard contact - arrangement see page 106
z.B.
A980 MS 00
A05 MS 21
A0500 MS 21-00
A110 MS 24-0

A = Silver contacts (4A 250V AC15)

A99 contact - arrangement according customer request

Z Spring return
R Friction brake
(P) Possibility of mounting potentiometer and encoder (Gessmann-types)

P Potentiometer
P324 T316 2x5 kOhm I max. 1 mA
P325 T316 2x10 kOhm I max. 1 mA
More potentiometer on request!

C Encoder
C... Encoder see page 118

If both axis identical, it`s enough to describe one axis!
example: ...A05P324 + A05P324 => A05P324

V11L S5 P T - 01 Z P + 03A R P - A05 P324 + A110 P325 - X

Axis 2: direction 3-4 left / direction 7-8 right			(not applicable to V11.1)	
(Standard contacts gold-plated 2A 250V AC15)				
01	<input type="checkbox"/>	2 contacts (2A 250V AC15)	Standard contact - arrangement see page 106	
02	<input type="checkbox"/>	4 contacts (2A 250V AC15)	z.B.	
03	<input type="checkbox"/>	6 contacts (2A 250V AC15)	A980	MS 00
			A05	MS 21
			A0500	MS 21-00
			A110	MS 24-0
	<input checked="" type="checkbox"/>	Silver contacts (4A 250V AC15)	A99 contact - arrangement according customer request	
Z	Spring return			
R	Friction brake			
(P)	Possibility of mounting potentiometer and encoder (Gessmann-types)			
P	Potentiometer	P324	T365 2x5 kOhm	I max. 1 mA
		P325	T365 2x10 kOhm	I max. 1 mA
	More potentiometer on request!			
C	Encoder	C... Encoder see page 118		

V11L S5 P T - 01 Z P + 03A R P - A05 P324 + A110 P325 - X

Special model	
X	Special / customer-specific


Special model	
Indicating labels	
Indicating labels with engraving	

Multi-axis controller


V11

1





T = Dead man's button
H = Signalbutton
M = Latch for mechanical zero interlock

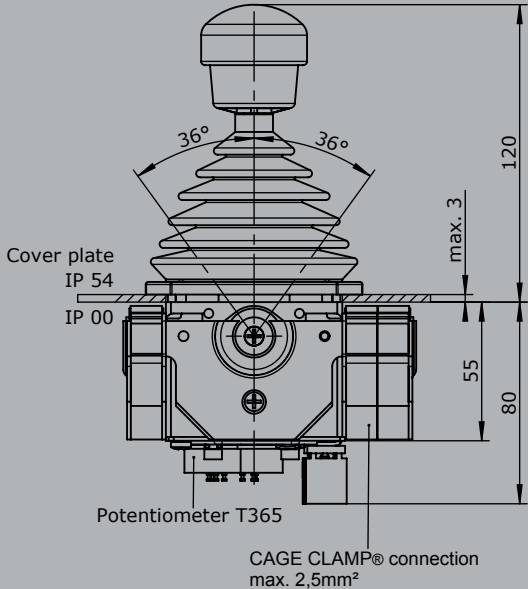

Knob solid
D= Push button



Palm grip B1

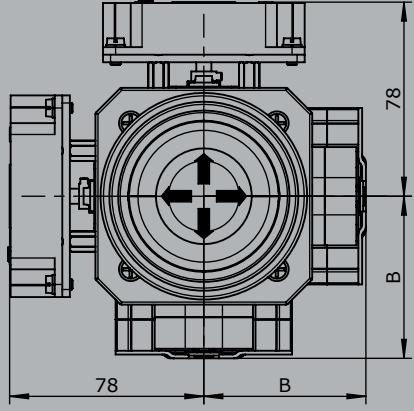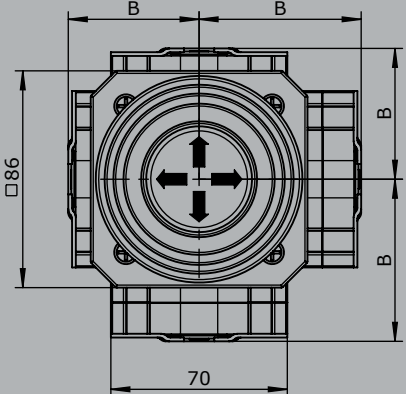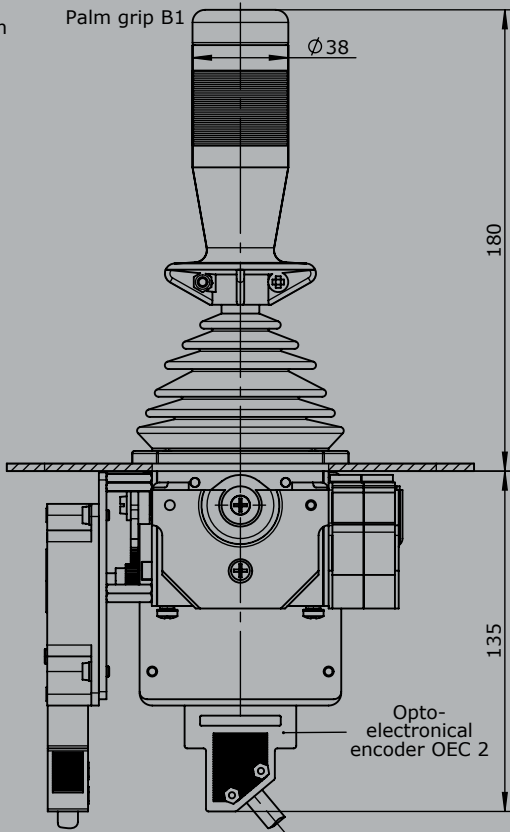

Type	No. of contacts	Dim. B
01	2	51
02	4	64
03	6	76

Multi-axis controller V8 / VV8



The multi-axis controller V8/VV8 is available in either single-axis or multi-axis options and is a robust controller used commonly in electro-hydraulic applications. With many output options including voltage, amperage and switch contacts and many handle options the V8 / VV8 series is hugely customisable. The V8 / VV8 is resistant to oil, maritime conditions e.g. offshore / vessels, UV radiation typically from the sun.



1 Technical data

Mechanical life V8	10 million operating cycles
Mechanical life VV8	20 million operating cycles
Operation temperature	-40°C til +60°C
Degree of protection	IP 54

		Example										
		VV8	S5	P	T	- 2RP	+ 3ZP	- B	- A05 P184	+ A050 P184	E9012	- X
Basic unit												
VV8	2-axis, reinforced version											
Control-handle extended												
	Standard											
S5	-20 mm											
S8	+20 mm											
*Only available in combination with handle!												
Gate												
P	Cross gate											
P X	Special gate											
Grip / palm grip												
T	Dead man											
Axis 1												
2	2 Contacts											
R	Friction brake											
P	Potentiometer											
Axis 2												
3	Contacts											
Z	Spring return											
P	Potentiometer											
Cover housing												
B	Cover housing											
Description axis 1 (direction 1-2)												
A050	Arrangement MSP 21-0											
P184	Potentiometer T301 2x5 kOhm											
Description axis 2 (direction 3-4)												
A05	Arrangement MSP 21											
P184	Potentiometer T301 2x5 kOhm											
Interface (description see on the following pages)												
E9012	Potentiometer output for proportional valve PVG32											
Special model												
X	Special / customer-specific											

Technical details may vary based on configuration or application! Technical data subject to change without notice!

Multi-axis controller

V8 / VV8

Combination possibilities with our ball handles



VV8 S5 P T - 2 R P + 3 Z P - B - A05 P184 + A050 P184 E9012 - X

Basic unit

V81 1-axis

V8 2-axis

reinforced version

VV81 1-axis

VV8 2-axis

Control-handle extended

S5 -20 mm

S8 +20 mm

Gate

P Cross gate

P X Special gate

Grip/ palm grip

Knob (included in basic unit!)

M Mechanical zero interlock

MH Mechanical zero interlock + signal contact

T Dead man

H Signal button

D Push button

DV Flush push button

B... Palm grip B... (see page palm grip 128)

Axis 1: direction 1-2

1 1 contact

2 2 contacts

3 3 contacts

Standard contact - arrangement see page 106

z.B.

A98 MS 0

Zero position contact

A05 MS 21

Direction contact

A050 MS 21-0

Direction contact + zero position contact

Z Spring return

R Friction brake only possible with VV8!

(P) Mounting options for potentiometer

P Potentiometer

P181 T301 2x0,5 kOhm I max. 1 mA

P182 T301 2x1 kOhm I max. 1 mA

P183 T301 2x2 kOhm I max. 1 mA

P184 T301 2x5 kOhm I max. 1 mA

P185 T301 2x10 kOhm I max. 1 mA

More potentiometer on request!

Hall-Potentiometer

P43

T1360

0,5...2,5...4,5V/4,5V...2,5...0,5

Technical details may vary based on configuration or application! Technical data subject to change without notice!

If both axis identical, it's enough to describe one axis!
example: ...A05P43 + A05P43 => A05P43

VV8 S5 P T - 2 R P + 3 Z P - B - A05 P184 + A050 P184 E9012 - X

Axis 2: direction 3-4 (not applicable to V81/VV81)

01	1 contact	Standard contact - arrangement see page 106		
02	2 contacts	z.B.		
03	3 contacts	A98	MS 0	Zero position contact
		A05	MS 21	Direction contact
		A050	MS 21-0	Direction contact + zero position contact

Z Spring return

R Friction brake only possible with VV8!

(P) Mounting options for potentiometer

P	Potentiometer	P181	T301 2x0,5 kOhm	I max. 1 mA
		P182	T301 2x1 kOhm	I max. 1 mA
		P183	T301 2x2 kOhm	I max. 1 mA
		P184	T301 2x5 kOhm	I max. 1 mA
		P185	T301 2x10 kOhm	I max. 1 mA
		More potentiometer on request!		

Hall-Potentiometer P43 T1360 0,5...2,5...4,5V/4,5V...2,5...0,5

VV8 S5 P T - 2 R P + 3 Z P - B - A05 P184 + A050 P184 E9012 - X

Cover housing

B Cover housing

Interface


	Potentiometer output
E901	Potentiometer output for proportional valve PVG32
	0,25...0,5...0,75Us
1	1 axis
2	2 axis
3	3 axis
4	4 axis

Special model





X Special / customer-specific

Multi-axis controller V8 / VV8

T = Dead man's button
H = Signal button
M = Latch for mechanical
zero interlock

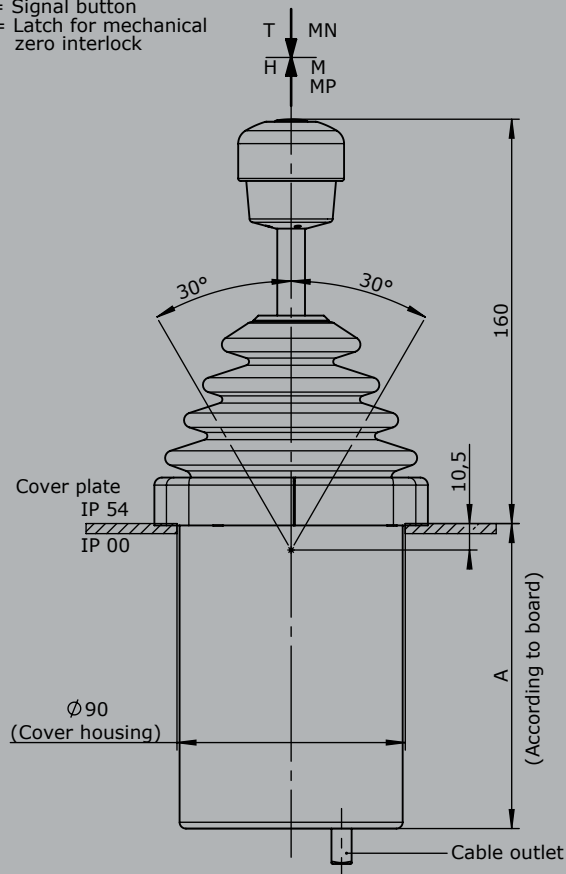

Knob solid
D= Push button

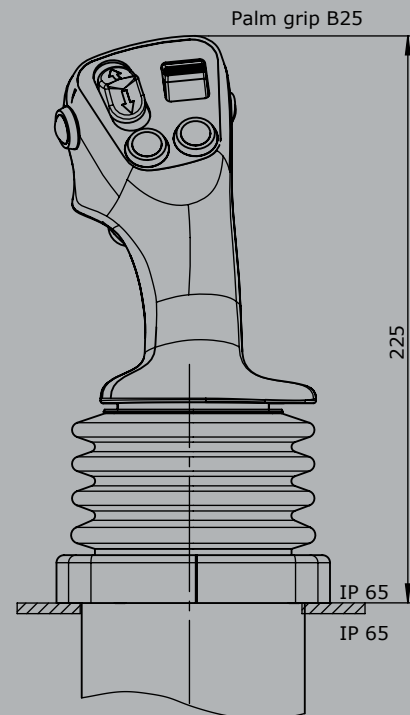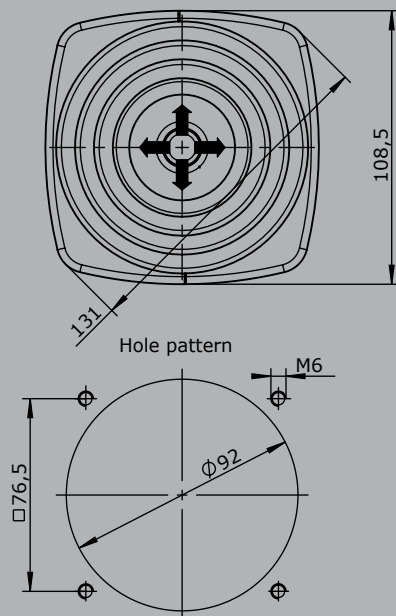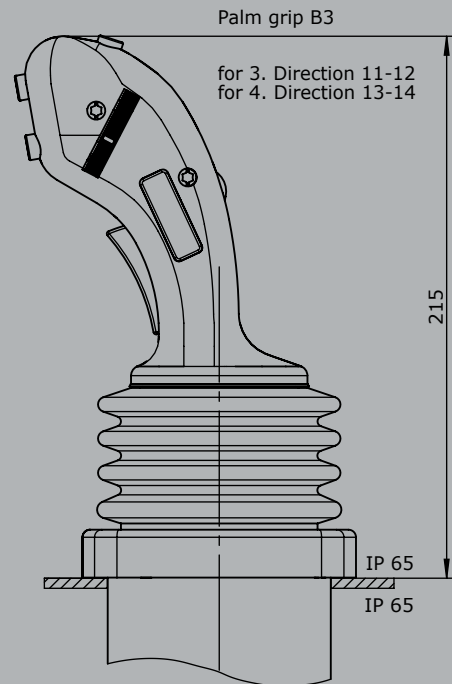

Multi-axis controller V85 / VV85



The multi-axis controller V85/VV85 is available in either single-axis or multi-axis options and is a robust controller used commonly in electro-hydraulic applications. With many output options including voltage, amperage and switching contacts and many handle options the V85/VV85 series is hugely customisable. The V85/VV85 is resistant to oil, maritime conditions e.g. offshore / vessels, UV radiation typically from the sun.



1

Technical data

Mechanical life V85	10 million operating cycles
Mechanical life VV85	20 million operating cycles
Supply voltage	see interface
Operation temperature	-40°C til + 60°C
Degree of protection	IP 54
Functional safety	PLd (EN ISO 13849) possible

	VV85	S8	P	Example T	- Z	+ R	- B	- E...	- X
Basic unit									
V85.1 1-axis									
V85 2-axis									
Reinforced version									
VV85.1 1-axis									
VV85 2-axis									
Control-handle extended									
Standard 160 mm									
S5 -20 mm									
S8 +20 mm									
<i>*Only available in combination with handle!</i>									
Gate									
P Cross gate									
P X Special gate									
Grip / palm grip									
Knob (included in basic unit!)									
Knob with Mechanical zero interlock									
T Dead man									
H Signal button									
D Push button									
B... Palm grip B... (see page palm grip 128)									
Axis 1									
Z Spring return									
R Friction brake only possible with VV85!									
Axis 2 (not applicable to V/VV85.1)									
Z Spring return									
R Friction brake only possible with VV85!									
Cover housing									
B Cover housing (included in basic unit!)									
Interface (description see on the following pages)									
E0xx Switching output									
E1xx Voltage output									
E2xx Current output									
E3xx CAN-interface									
E4xx CANOpen Safety interface									
E5xx Profibus DP-interface									
E6xx Profinet									
E7xx Profinet Safe									
Special model									
X Special / customer-specific									

Technical details may vary based on configuration or application! Technical data subject to change without notice!

Multi-axis controller

V85 / VV85

Combination possibilities with our ball handles

 S. 128	 S. 130	 S. 132	 S. 135	 S. 137	 S. 139	 S. 141	 S. 143	 S. 145
 S. 147	 S. 149	 S. 151	 S. 153	 S. 155	 S. 157	 S. 159		

Digital output

Supply voltage	9-32VDC
Current carrying capacity	Direction signal 150 mA Zero position signal 500 mA
Mounting depth A	85 mm
Wiring	Cable 500 mm long with plug connector (male) CPC 17 - 14-pole

2 Direction signal + 1 zero position signal (galvanically isolated) per axis	1 axis	E001 1
	2 axis	2

Voltage output (not stabilized)

Supply voltage	4,75-5,25VDC
Current carrying capacity	Direction signal 8 mA
Mounting depth A	85 mm
Wiring	Cable 500 mm long with plug connector (male) CPC 17 - 14-pole 2. Cable (for axis 3+4 or grip functions) 500 mm long with plug connector (female) CPC17-14-pole

0,5...2,5...4,5V redundant + 2 direction signal per axis	1 axis	E104 1	<input type="checkbox"/>
	2 axis	2	<input type="checkbox"/>

Voltage output

Supply voltage	9-32VDC (*11,5-32)
Current carrying capacity	Direction signal 150 mA Zero position signal 500 mA
Mounting depth A	85 mm
Wiring	Cable 500 mm long with plug connector (male) CDC 17 - 14-pole 2. Cable (for axis 3+4 or grip functions) 500 mm long with plug connector (female) CPC17-14-pole

0,5...2,5...4,5V redundant + 2 direction signal + 1 zero position signal (galvanically isolated) per axis	1 axis	E112 1	<input type="checkbox"/>
	2 axis	2	<input type="checkbox"/>
	3 axis*	3	<input type="checkbox"/>
	4 axis*	4	<input type="checkbox"/>

0...5...10V redundant + 2 direction signal + 1 zero position signal (galvanically isolated) per axis, supply voltage 11,5 - 32VDC

1 axis	E132 1	<input type="checkbox"/>
2 axis	2	<input type="checkbox"/>
3 axis*	3	<input type="checkbox"/>
4 axis*	4	<input type="checkbox"/>

10...0...10V 2 direction signal + 1 zero position signal (galvanically isolated) per axis, supply voltage 11,5 - 32VDC,
sensor redundant, 1 output with signal monitoring

1 axis	E136 1
2 axis	2
3 axis*	3
4 axis*	4

Current output

Supply voltage	9-32VDC
Current carrying capacity	Direction signal 150 mA Zero position signal 500 mA
Mounting depth A	85 mm
Wiring	Cable 500 mm long with plug connector (male) CDC 17 - 14-pole 2. Cable (for axis 3+4 or grip functions) 500 mm long with plug connector (female CPC17 - 14-pole)

0...10...20 mA 2 direction signal + 1 zero position signal (galvanically isolated) per axis, sensor redundant,
1 output with signal monitoring

1 axis	E206 1
2 axis	2
3 axis*	3
4 axis*	4

20...0...20 mA 2 direction signal + 1 zero position signal (galvanically isolated) per axis, sensor redundant,
1 output with signal monitoring

1 axis	E208 1
2 axis	2
3 axis*	3
4 axis*	4

4...12...20 mA 2 direction signal + 1 zero position signal (galvanically isolated) per axis, sensor redundant,
1 output with signal monitoring

1 axis	E214 1
2 axis	2
3 axis*	3
4 axis*	4

20...4...20 mA 2 direction signal + 1 zero position signal (galvanically isolated) per axis, sensor redundant,
1 output with signal monitoring

1 axis	E216 1
2 axis	2
3 axis*	3
4 axis*	4

**Axis for handle functions, interface can vary depending upon actuation element!*

Voltage output with other value on request!

CAN		
Supply voltage	9-36VDC	
Idle current consumption	120 mA	
Mounting depth A	85 mm (Expansion stage 1)	
	85 mm (Expansion stage 2)	
	85 mm (Expansion stage 3)	
	100 mm (Expansion stage 4)	
Protocol	CANopen CiA DS 301 or SAE J 1939	
Baudrate	125 kBit/s til 1 Mbit/s	
Output value	0...128...255	
Wiring	CAN (IN) cable 500 mm with plug connector M12 (male)	
	CAN (OUT) cable 500 mm with plug connector M12 (female)	
	External in-/outputs cable 500 mm with plug connector CPC 23-37 (female)	
CAN Expansion stage 1		E304 1 <input type="checkbox"/>
- 3 analog joystick axis		
- 14 digital joystick functions		
or 10 digital joystick functions + 4 LED-outputs		
CAN Expansion stage 2		E305 1 <input type="checkbox"/>
- 5 analog joystick axis		
- 14 digital joystick functions		
- Input for capacitive sensor		
<i>*external LED-outputs can be used in the grip for LED`s</i>		
with additional external in-/outputs		
- 4 external LED-outputs, 8 external digital inputs		2 <input type="checkbox"/>
CAN Expansion stage 3		E306 1 <input type="checkbox"/>
- 8 analog joystick axis		
- 14 digital joystick functions		
- Input for capacitive sensor		
<i>*external LED-outputs can be used in the grip for LED`s</i>		
with additional external in-/outputs		
- 8 external LED-outputs, 8 external digital inputs		2 <input type="checkbox"/>
- 8 external LED-outputs, 16 external digital inputs		3 <input type="checkbox"/>
- 24 external digital inputs		4 <input type="checkbox"/>
- 8 external LED-outputs, 24 external digital inputs		5 <input type="checkbox"/>
CAN Expansion stage 4		E307 1 <input type="checkbox"/>
- 9 analog joystick axis		
- 14 digital joystick functions		
- 2 inputs für capacitive sensor		
<i>*external LED-outputs can be used in the grip for LED`s</i>		
with additional external in-/outputs		
- 8 external LED-outputs, 8 external digital inputs		2 <input type="checkbox"/>
- 8 external LED-outputs, 16 external digital inputs		3 <input type="checkbox"/>
- 24 external digital inputs		4 <input type="checkbox"/>
- 8 external LED-outputs, 24 external digital inputs		5 <input type="checkbox"/>
with additional signals separately wired (not CAN)		

CANOpen Safety			
Supply voltage	9-36VDC		
Idle current consumption	120 mA		
Mounting depth A	85 mm (Expansion stage 1)		
	85 mm (Expansion stage 2)		
	85 mm (Expansion stage 3)		
	100 mm (Expansion stage 4)		
Protocol	CAN Safety CIA 304		
Baudrate	125 kBit/s til 1 MBit/s		
Output value	0...128...255		
Wiring	CAN (IN) cable 500 mm with plug connector M12 (male)		
	CAN (OUT) cable 500 mm with plug connector M12 (female)		
	External in-/outputs cable 500 mm with plug connector CPC 23-37 (female)		
CANOpen Safety expansion stage 1		E404 1	<input type="checkbox"/>
- 3 analog joystick axis			
- 14 digital joystick functions			
or 10 digital joystick functions + 4 LED-outputs			
CANOpen Safety expansion stage 2		E405 1	<input type="checkbox"/>
- 5 analog joystick axis			
- 14 digital joystick functions			
- Input for capacitive sensor			
<i>*external LED-outputs can be used in the grip for LED`s</i>			
with additional external in-/outputs			
- 4 external LED-outputs, 8 external digital inputs		2	<input type="checkbox"/>
CANOpen Safety expansion stage 3		E406 1	<input type="checkbox"/>
- 8 analog joystick axis			
- 14 digital joystick functions			
- Input for capacitive sensor			
<i>* external LED-outputs can be used in the grip for LED`s</i>			
with additional external in-/outputs			
- 8 external LED-outputs, 8 external digital inputs		2	<input type="checkbox"/>
- 8 external LED-outputs, 16 external digital inputs		3	<input type="checkbox"/>
- 24 external digital inputs		4	<input type="checkbox"/>
- 8 external LED-outputs, 24 external digital inputs		5	<input type="checkbox"/>
CANOpen Safety expansion stage 4		E407 1	<input type="checkbox"/>
- 9 analog joystick axis			
- 14 digital joystick functions			
- Input for capacitive sensor			
<i>*external LED-outputs can be used in the grip for LED`s</i>			
with additional external in-/outputs			
- 8 external LED-outputs, 8 external digital inputs		2	<input type="checkbox"/>
- 8 external LED-outputs, 16 external digital inputs		3	<input type="checkbox"/>
- 24 external digital inputs		4	<input type="checkbox"/>
- 8 external LED-outputs, 24 external digital inputs		5	<input type="checkbox"/>
with additional signals separately wired (not CAN)			
- 2 direction signal + 1 zero position signal (potential free) per main-axis			<input type="checkbox"/>

Profibus DP

Supply voltage	18-30VDC
Baudrate	til 12MBit/s
Output value	0...128...255
Mounting depth A	100 mm
Wiring	Profibus, cable 100 mm with plug connector D-Sub 9 Power supply (contact wiring) cable 500 mm with plug connector CPC 13-9 (male) external in-/outputs, cable 500 mm with plug connector CPC 23-37 (female)

Profibus DP

- 4 analog joystick axis
- 16 digital joystick functions
- Input for capacitive sensor

**external LED-outputs can be used in the grip for LED`s*

with additional external in-/outputs

- 8 external LED-outputs, 8 external digital inputs
- 16 external LED-outputs, 16 external digital inputs

E501 1 ☐

2 ☐

3 ☐

with additional contact equipment separately wired (not profibus)

- 2 direction contact + 1 zero position contact (not potential-free) per main-axis
- 1 zero position contact (potential free) per main-axis

1

2

Profinet

Supply voltage	18-30VDC
Baudrate	til 12MBit/s
Output value	0...128...255
Mounting depth A	100 mm
Wiring	Profinet (IN), cable 300 mm with M12 plug connector (female) Profinet (OUT), cable 300 mm with M12 plug connector (female) Power supply (contact wiring) cable 500 mm with plug connector CPC 13-9 (male) External in-/outputs, cable 500 mm with plug connector CPC 23-37 (female)

Profinet

- 4 analog joystick axis
- 16 digital joystick functions
- Input for capacitive sensor

**external LED-outputs can be used in the grip for LED`s*

with with additional external in-/outputs

- 8 external LED-outputs, 8 external digital inputs
- 16 external LED-outputs, 16 external digital inputs

E601 1 ☐

2 ☐

3 ☐

with additional signals separately wired (not with profinet)

- 2 direction signal + zero position signal (potential free) per main-axis

3

Profinet Safe

Supply voltage	18-30VDC		
Baudrate	til 12 MBit/s		
Output value	0...128...255		
Mounting depth A	100 mm		
Wiring	Profinet (IN), cable 300 mm with M12 plug connector (female)		
	Profinet (OUT), cable 300 mm with M12 plug connector (female)		
	Power supply (contact wiring) cable 500 mm with plug connector CPC 13-9 (male)		
	External in-/outputs, cable 500 mm with plug connector CPC 23-37 (female)		
- 4 analog joystick axis		E701 1	<input type="checkbox"/>
- 16 digital joystick functions			
- Input for capacitive sensor			
<i>*external LED-outputs can be used in the grip for LED`s</i>			
with with additional external in-/outputs			
- 8 external LED-outputs, 8 external digital inputs		2	<input type="checkbox"/>
- 16 external LED-outputs, 16 external digital inputs		3	<input type="checkbox"/>
with additional signals separately wired (not with profinet safe)			
- 2 direction signal + zero position signal (potential free) per main-axis			<input type="checkbox"/>

Other outputs

Voltage output for PVG32 0,25...0,5...0,75Us, power supply 12 VDC			
Wiring: Cable 500 mm long with plug CPC 17-14 (male)			
	1 axis	E902 1	<input type="checkbox"/>
	2 axis	2	<input type="checkbox"/>
	3 axis	3	<input type="checkbox"/>
	4 axis	4	<input type="checkbox"/>
with additional direction contacts per main-axis			<input type="checkbox"/>
Voltage output for PVG32 0,25...0,5...0,75Us, power supply 12 VDC			
Wiring: Cable 500 mm long with plug CPC 17-14 (male)			
	1 axis	E906 1	<input type="checkbox"/>
	2 axis	2	<input type="checkbox"/>
	3 axis	3	<input type="checkbox"/>
	4 axis	4	<input type="checkbox"/>
with additional direction contacts per main-axis			<input type="checkbox"/>
8 Bit Gray-Code with direction signals per main-axis, supply voltage 9-36 VDC			
Wiring: 1 Cable 500 mm with plug CPC 23-37 (female) axis 1-2			
1 Cable 500 mm with plug CPC 23-37 (male) axis 3-4			
	1 axis	E903 1	
	2 axis	2	
	3 axis	3	
	4 axis	4	

Multi-axis controller

V85 / VV85

8 Bit Binär-Code with direction signals per main-axis, supply voltage 9-36 VDC

Wiring: 1 Cable 500 mm with plug CPC 23-37 (female) axis 1-2
1 Cable 500 mm with plug CPC 23-37 (male) axis 3-4

1 axis	E904 1
2 axis	2
3 axis	3
4 axis	4

Special model

Mating connector AMP CPC 17 14-pole (male insert)	5300000209
Mating connector AMP CPC 17 14-pole (male insert) with 2 m cable	5300000210
Mating connector AMP CPC 17 14-pole (female contact)	5300000211
Mating connector AMP CPC 17 14-pole (female contact) with 2 m cable	5300000213
Mating connector AMP CPC 23 37-pole (male insert)	5300000214
Mating connector AMP CPC 23 37-pole (male insert) with 2 m cable	5300000215
Mating connector AMP CPC 23 37-pole (female contact)	5300000216
Mating connector AMP CPC 23 37-pole (female contact) with 2 m cable	5300000217
Mating connector (CAN) M12 (male insert) with 2 m cable	20201140
Mating connector (CAN) M12 (female contact) with 2 m cable	20202298
Mating connector (Profibus) straight	22201440
Mating connector (Profibus) 90° angled	22201741
Mating connector (Profinet IN) M12 (male insert) with 2 m cable	5300000222
Mating connector (Profinet OUT) M12 (male insert) with 2 m cable	5300000223





Multi-axis controller V85 / VV85

T = Dead man's button
H = Signal button


Knob solid
D= Push button

Palm grip B3

for 3. Direction 11-12
for 4. Direction 13-14

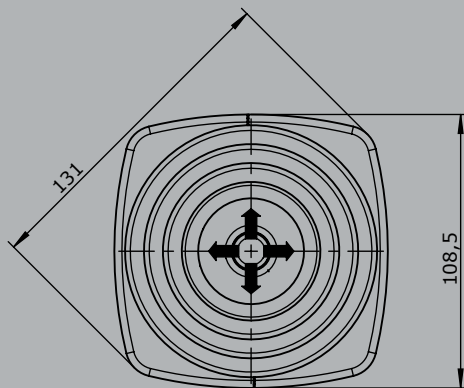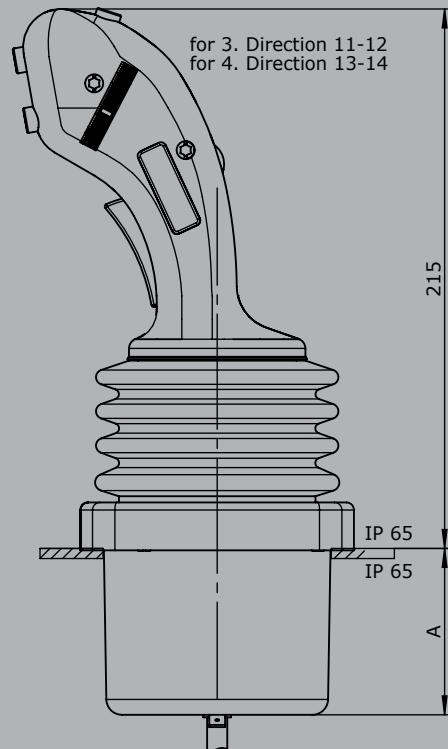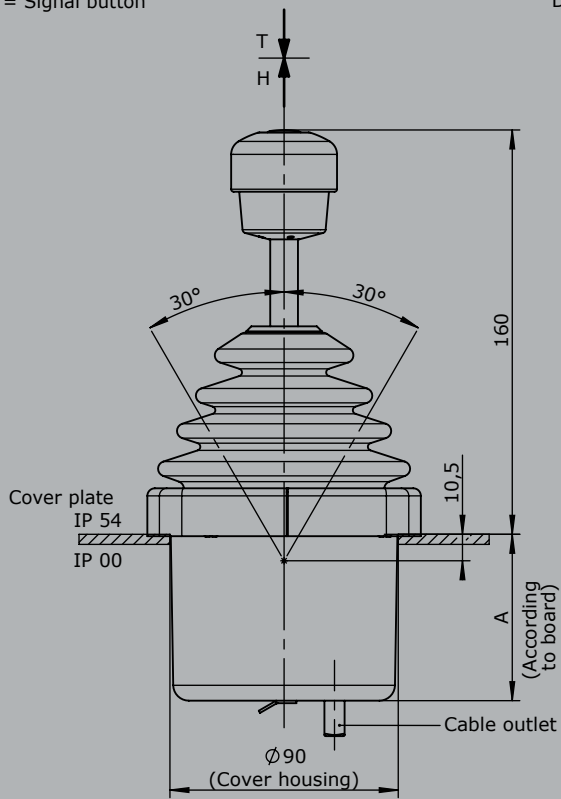

Palm grip B25

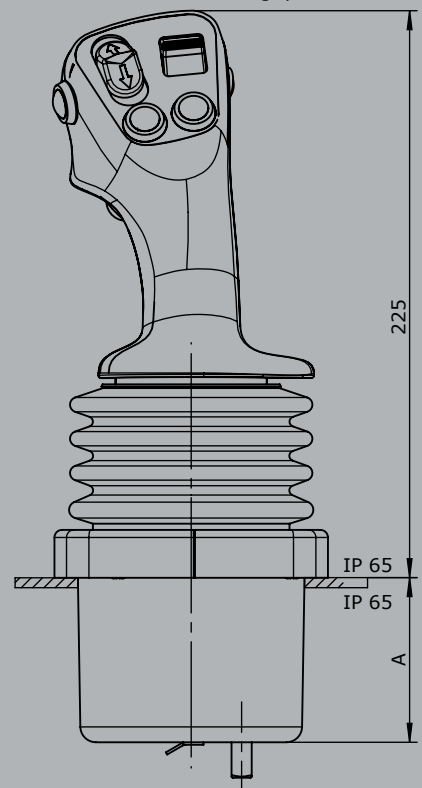

Multi-axis controller V24



The association drive V24 is designed as a driving joystick for construction and agricultural machinery. It has a parking position which can be inserted in the zero position. The V24 is characterized by its extremely rugged design. Through its various interfaces and the many possibilities of combination with our numerous ball handles the V24 is very flexible.

Technical data

Mechanical life V24	20 million operating cycles
Supply voltage	see interface
Operation temperature	-40°C til +60°C
Degree of protection	IP 54
Functional safety	PLd (EN ISO 13849) possible



1

	V24	Example P1	T	- R	- E...	- X
Basic unit						
V24.1 Multi-axis controller, 1-axis						
V24L Multi-axis controller, 1-axis with parking position left						
V24R Multi-axis controller, 1-axis parking position right						
Gate						
P1 T-gate main axis axial <i>(included in basic unit!)</i>						
P2 T-gate main axis right outside						
P3 T-gate main axis left outside						
PX Special gate						
Grip / Palm grip						
Knob <i>(included in basic unit!)</i>						
T Dead man						
H Signal button						
D Push button						
B... Palm grip B... <i>(see page palm grip 128)</i>						
Main axis						
R Friction brake adjustable <i>(included in basic unit!)</i>						
Interface <i>(description see on the following pages)</i>						
E3xx CAN-interface						
E4xx CANOpen Safety interface						
Special model						
X Special / customer-specific						

Multi-axis controller
V24

Combination possibilities with our ball handles

 S. 128	 S. 130	 S. 132	 S. 135	 S. 137	 S. 139	 S. 141	 S. 143	 S. 145
 S. 147	 S. 149	 S. 151	 S. 153	 S. 155	 S. 157	 S. 159		

CAN

Supply voltage	9-36VDC
Idle current consumption	120 mA
Mounting depth A	60 mm
Protocol	CANopen CiA DS 301 or SAE J 1939
Baudrate	125 kBit/s til 1 Mbit/s
Output value	0...128...255
Wiring	CAN (IN) cable 500 mm with plug connector M12 (male) CAN (OUT) cable 500 mm with plug connector M12 (female) Digital-/analog outputs cable 500 mm with plug connector CPC 17-14 (female)

CAN V24

- 5 analog joystick axis
- 22 digital joystick functions
- or 18 digital joystick functions + 8 LED-outputs
- Input for capacitive sensor

E308 1 ☐

with additional digital-/ analog outputs for the main axis

- 2 direction signals + 1 zero position signal (potential free) per axis 1
- 0,5...2,5...4,5V redundant contra rotating + 2 direction signals + 1 zero position signal (galvanically isolated) direction 1-2 and 2 direction signals + 1 zero position signal (galvanically isolated) direction 3-4 2
- 0,5...2,5...4,5V redundant contra rotating + 2 direction signals + 1 zero position signal (galvanically isolated) direction 1-2 and 0,5...2,5...4,5V redundant contra rotating direction 3-4 3
- 4...12...20mA redundant contra rotating + 2 direction signals + 1 zero position signal (galvanically isolated) direction 1-2 and 2 direction signals + 1 zero position signal (galvanically isolated) direction 3-4 4
- 4...12...20mA redundant contra rotating + 2 direction signals + 1 zero position signal (galvanically isolated) direction 1-2 and 4...12...20mA redundant contra rotating direction 3-4 5

CANOpen Safety

Supply voltage	9-36VDC
Idle current consumption	120 mA
Mounting depth A	60 mm
Protocol	CANOpen Safety CIA 304
Baudrate	125 kBit/s til 1 Mbit/s
Output value	0...128...255
Wiring	CAN (IN) cable 500 mm with plug connector M12 (male) CAN (OUT) cable 500 mm with plug connector M12 (female) Digital-/ analog outputs cable 500 mm with plug connector CPC 17-14 (female)

CANOpen Safety V24

- 5 analog joystick axis
- 14 digital joystick functions
- or 10 digital joystick functions + 4 LED-outputs
- Input for capacitive sensor


E408 1 ☐

with additional digital-/ analog outputs for the main axis

- 2 direction signals + 1 zero position signal (potential free) per axis 1
- 0,5...2,5...4,5V redundant contra rotating + 2 direction signals + 1 zero position signal (galvanically isolated) direction 1-2 and 2 direction signals + 1 zero position signal (galvanically isolated) direction 3-4 2
- 0,5...2,5...4,5V redundant contra rotating + 2 direction signals + 1 zero position signal (galvanically isolated) direction 1-2 and 0,5...2,5...4,5V redundant contra rotating direction 3-4 3
- 4...12...20mA redundant contra rotating + 2 direction signals + 1 zero position signal (galvanically isolated) direction 1-2 and 2 direction signals + 1 zero position signal (galvanically isolated) direction 3-4 4
- 4...12...20mA redundant contra rotating + 2 direction signals + 1 zero position signal (galvanically isolated) direction 1-2 and 4...12...20mA redundant contra rotating direction 3-4 5

Special model

Mating connector AMP CPC 17 14-pole (male insert)	5300000209
Mating connector AMP CPC 17 14-pole (male insert) with 2 m cable	5300000210
Mating connector (CAN) M12 (male insert) with 2 m cable	20201140
Mating connector (CAN) M12 (female contact) with 2 m cable	20202298

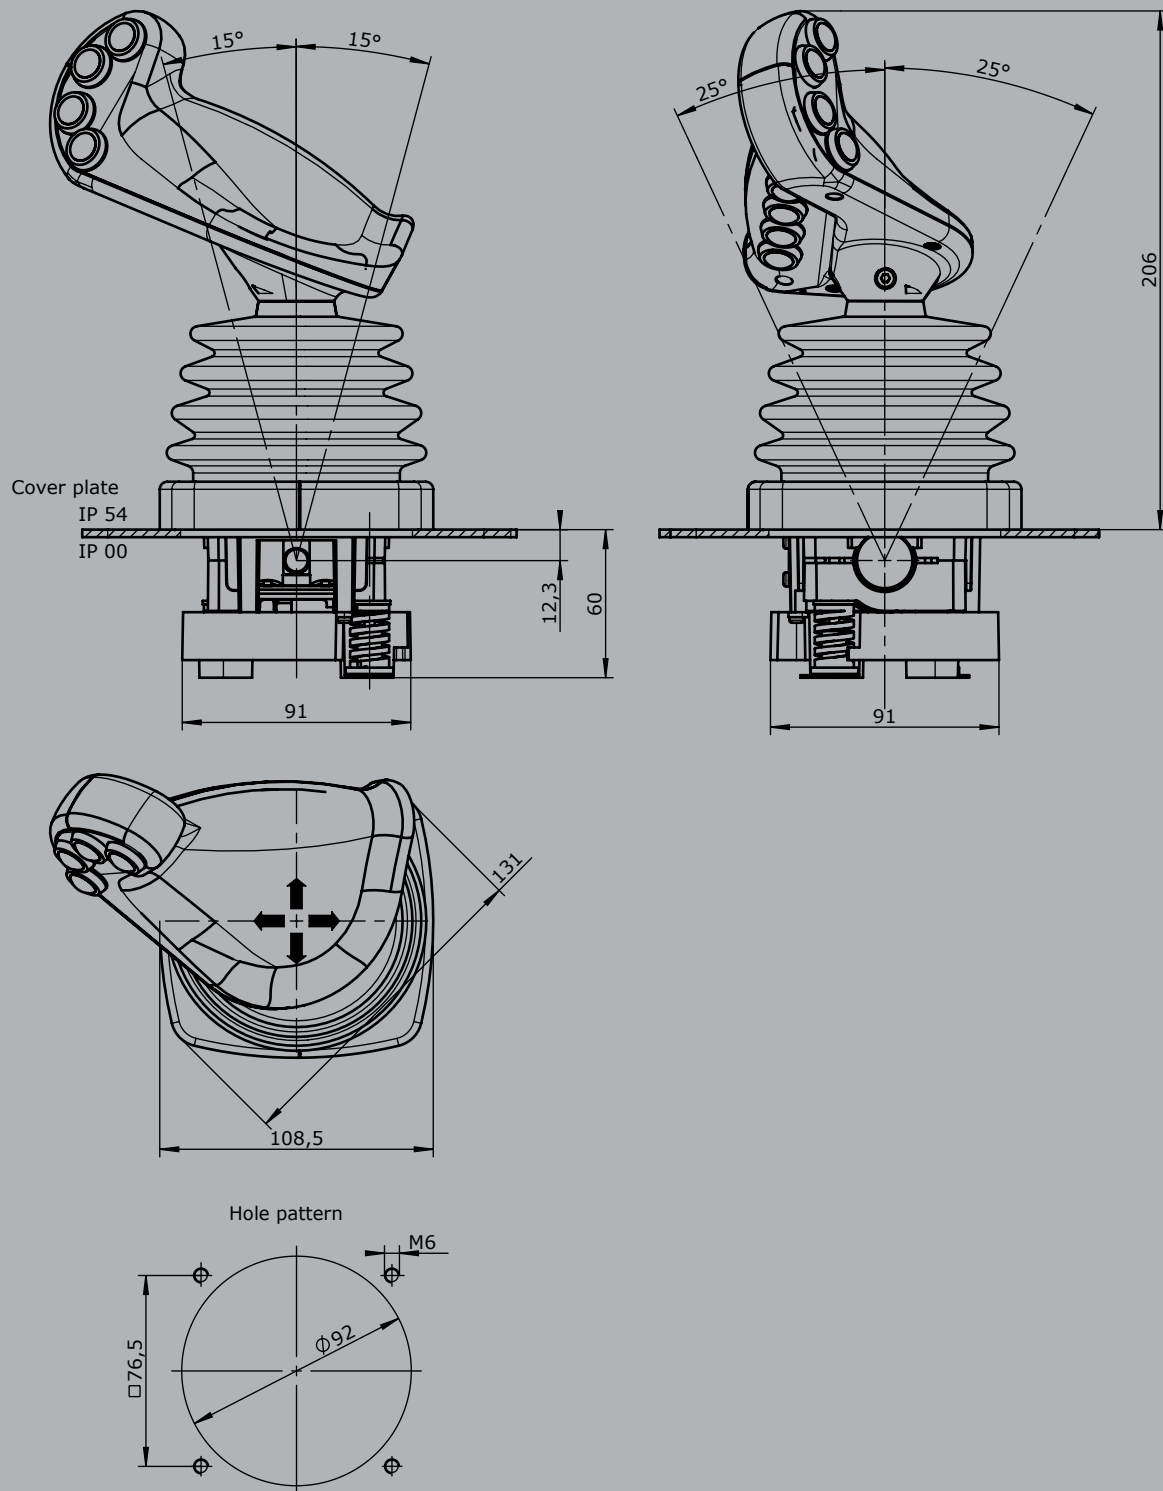

Multi-axis controller V25



The multi-axis controller V25 is available in either single-axis or multi-axis options and is a robust controller used commonly in electro-hydraulic applications. With many output options including voltage, amperage and switching contacts and many handle options the V25 series is hugely customisable. The V25 is resistant to oil, maritime conditions e.g. offshore / vessels, UV radiation typically from the sun.

Technical data

Mechanical life V25	8 million operating cycles
Supply voltage	see interface
Operation temperature	-40°C til +60°C
Degree of protection	IP 54
Functional safety	PLd (EN ISO 13849) possible



1

	V25	S8	P	Example T	- Z	- B	- E...	- X
Basic unit								
V25.1 1-axis								
V25 2-axis								
Control-handle long								
Standard 100 mm								
S8 +20 mm								
<i>*Only available in combination with handle!</i>								
Gate								
P Cross gate								
Grip / palm grip								
Knob (included in basic unit!)								
M Mechanical zero interlock								
T Knob with dead man								
H Knob with signal button								
D Knob with push button KDA/70								
B ... Palm grip B... (see page palm grip 128)								
Spring return (included in basic unit!)								
Z Spring return								
Cover housing (description see page 161)								
B Cover housing								
Interface (description see on the following page)								
E0xx Switching output								
E1xx Voltage output								
E2xx Current output								
E3xx CAN-interface								
E4xx CANOpen Safety interface								
Special model								
X Special / customer-specific								

Multi-axis controller

V25

Combination possibilities with our ball handles

 S. 128	 S. 130	 S. 132	 S. 135	 S. 137	 S. 139	 S. 141	 S. 143	 S. 145
 S. 147	 S. 149	 S. 151	 S. 153	 S. 155	 S. 157	 S. 159		

Digital output

Supply voltage	9-32VDC	
Current carrying capacity	Direction signal 150 mA Zero position signal 500 mA	
Wiring	Cable 500 mm long with plug connector (male) CPC 17 - 14-pole	
2 Direction signal + 1 zero position signal (galvanically isolated) per axis		
	1 axis	E001 1

Voltage output (not stabilized)

Supply voltage	4,75-5,25VDC	
Current carrying capacity	Direction signal 8 mA	
Mounting depth A	60 mm	
Wiring	Cable 500 mm long with plug connector (male) CPC 17 - 14-pole	
	2. cable (for axis 3+4 or grip functions) 500 mm long with plug connector (female) CPC 17-14-pole	Characteristic: <input type="checkbox"/> = contra rotating, <input checked="" type="checkbox"/> = concurrently rotating
0,5...2,5...4,5V redundant + 2 direction signal per axis		
	1 axis	E104 1 <input type="checkbox"/>

Voltage output

Supply voltage	9-32VDC (*11,5-32V)	
Current carrying capacity	Direction signal 150 mA Zero position signal 500 mA	
Wiring	Cable 500 mm long with plug connector (male) CPC 17 - 14-pole	
	2. cable (for axis 3+4 or grip functions) 500 mm long with plug connector (female) CPC 17-14-pole	Characteristic: <input type="checkbox"/> = contra rotating, <input checked="" type="checkbox"/> = concurrently rotating
0,5...2,5...4,5V redundant + 2 direction signal + 1 zero position signal (galvanically isolated) per axis		
	1 axis	E112 1 <input type="checkbox"/>
	2 axis	2 <input type="checkbox"/>
	3 axis*	3 <input type="checkbox"/>
	4 axis*	4 <input type="checkbox"/>
0...5...10V redundant + 2 direction signal + 1 zero position signal (galvanically isolated) per axis, supply voltage 11,5 - 32VDC		
	1 axis	E132 1 <input type="checkbox"/>
	2 axis	2 <input type="checkbox"/>
	3 axis*	3 <input type="checkbox"/>
	4 axis*	4 <input type="checkbox"/>

Technical details may vary based on configuration or application! Technical data subject to change without notice!

Multi-axis controller V25

10...0...10V 2 direction signal + 1 zero position signal (galvanically isolated) per axis, supply voltage 11,5 - 32VDC, sensor redundant, 1 output with signal monitoring

1 axis	E136	1
2 axis		2
3 axis *		3
4 axis *		4

**Axis for handle functions, interfaces may vary depending upon actuation element!*

Voltage output with other value on request!

Current output

Supply voltage	9-32VDC
Current carrying capacity	Direction signal 150 mA Zero position signal 500 mA
Mounting depth A	60 mm 75 mm (from 3 axis)
Wiring	Cable 500 mm long with plug connector (male) CPC 17 - 14-pole 2. cable (for axis 3+4 or grip functions) 500 mm long with plug connector (female) CPC 17-14-pole

0...10...20mA 2 direction signal + 1 zero position signal (galvanically isolated) per axis, sensor redundant, 1 output with signal monitoring

1 axis	E206	1
2 axis		2
3 axis*		3
4 axis*		4

20...0...20mA 2 direction signal + 1 zero position signal (galvanically isolated) per axis, sensor redundant, 1 output with signal monitoring

1 axis	E208	1
2 axis		2
3 axis*		3
4 axis*		4

4...12...20mA 2 direction signal + 1 zero position signal (galvanically isolated) per axis, sensor redundant, 1 output with signal monitoring

1 axis	E214	1
2 axis		2
3 axis*		3
4 axis*		4

20...4...20mA 2 direction signal + 1 zero position signal (galvanically isolated) per axis, sensor redundant, 1 output with signal monitoring


1 axis	E216	1
2 axis		2
3 axis*		3
4 axis*		4

**Axis for handle functions, interfaces may vary depending upon actuation element!*


Voltage output with other value on request!

Identification of the installation variants with switching directions:

V25.1



V25



CAN		
Supply voltage	9-36VDC	
Idle current consumption	120 mA	
Mounting depth A	60 mm (Expansion stage 1) 75 mm (Expansion stage 2) 95 mm (Expansion stage 3)	
Protocol	CANopen CiA DS 301 or SAE J 1939	
Baudrate	125 kBit/s til 1 Mbit/s	
Output value	0...128...255	
Wiring	CAN (IN) cable 500 mm with plug connector M12 (male) CAN (OUT) cable 500 mm with plug connector M12 (female) External in-/outputs cCable 500 mm with plug connector CPC 23-37 (female)	
CAN expansion stage 1		E301 1 <input type="checkbox"/>
- 3 analog joystick axis - 14 digital joystick functions or 11 digital Joystick functions + 4 LED-outputs		
CAN expansion stage 2		E302 1 <input type="checkbox"/>
- 6 analog joystick axis - 14 digital joystick functions - Input for capacitive sensor <i>*external LED-outputs can be used in the grip for LED`s</i>		
with additional external in-/outputs - 4 external LED-outputs, 16 external digital inputs		2 <input type="checkbox"/>
CAN expansion stage 3		E303 1 <input type="checkbox"/>
- 9 analog joystick axis - 14 digital joystick functions - 2 inputs für capacitive sensor <i>*external LED-outputs can be used in the grip for LED`s</i>		
with additional external in-/outputs - 8 external LED-outputs, 8 external digital inputs		2 <input type="checkbox"/>
- 8 external LED-outputs, 16 external digital inputs		3 <input type="checkbox"/>
- 24 external digital inputs		4 <input type="checkbox"/>
with additional contact equipment separately wired (not CAN)		
- 2 direction contact + 1 zero position contact (not potential-free) per axis		<input type="checkbox"/>
- 1 zero position contact (potential free) per axis		<input type="checkbox"/>

CANOpen Safety

Supply voltage	9-36VDC
Idle current consumption	120 mA
Baudrate	125 kBit/s til 1MBit/s
Output value	0...128...255
Mounting depth	60 mm (Expansion stage 1) 75 mm (Expansion stage 2) 95 mm (Expansion stage 3)
Protocol	CANOpen Safety CIA 304
Wiring	CAN (IN) cable 500 mm with plug connector M12 (male) CAN (OUT) cable 500 mm with plug connector M12 (female) External in-/outputs cable 500 mm with plug connector (female) CPC 23 37-pole

CANOpen Safety expansion stage 1

E401 1 ☐

- 3 analog joystick axis
- 14 digital joystick functions
- or 10 digital joystick functions + 4 LED-outputs

CANOpen Safety expansion stage 2

E402 1 ☐

- 6 analog joystick axis
- 14 digital joystick functions
- input for capacitive sensor
- *external LED-outputs can be used in the grip for LED`s*

with additional external in-/outputs

- 4 external LED-outputs, 16 external digital inputs

2 ☐

CANOpen Safety expansion stage 3

E403 1 ☐

- 9 analog joystick axis
- 14 digital joystick functions
- 2 inputs for capacitive sensor
- *external LED-outputs can be used in the grip for LED`s*

with additional external in-/outputs

- 8 external LED-outputs, 8 external digital inputs
- 8 external LED-outputs, 16 external digital inputs
- 24 external digital inputs

2 ☐

3 ☐

4 ☐

with additional signals separately wired (not CAN)

- 2 direction signals + 1 zero position signal (potential free) per axis

3 ☐





Special model

Mating connector AMP CPC 17 14-pole (male insert)	5300000209
Mating connector AMP CPC 17 14-pole (male insert) with 2 m cable	5300000210
Mating connector AMP CPC 17 14-pole (female contact)	5300000211
Mating connector AMP CPC 17 14-pole (female contact) with 2 m cable	5300000213
Mating connector AMP CPC 23 37-pole (male insert)	5300000214
Mating connector AMP CPC 23 37-pole (male insert) with 2 m cable	5300000215
Mating connector M12 male insert with 2 m cable	20201140
Mating connector M12 female insert with 2 m cable	20202298



T = Dead man's button
H = Signal button
M = Latch for mechanical
zero interlock

Palm grip B1

Palm grip B3

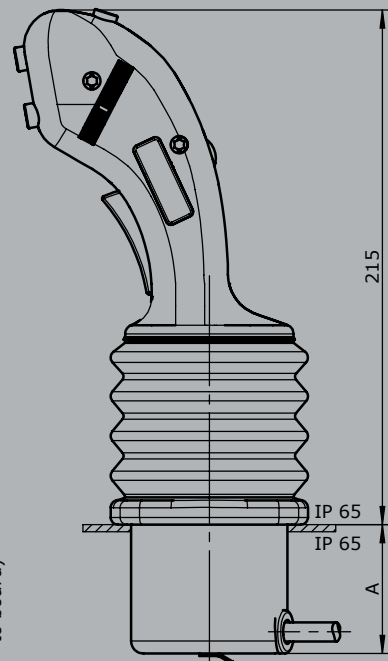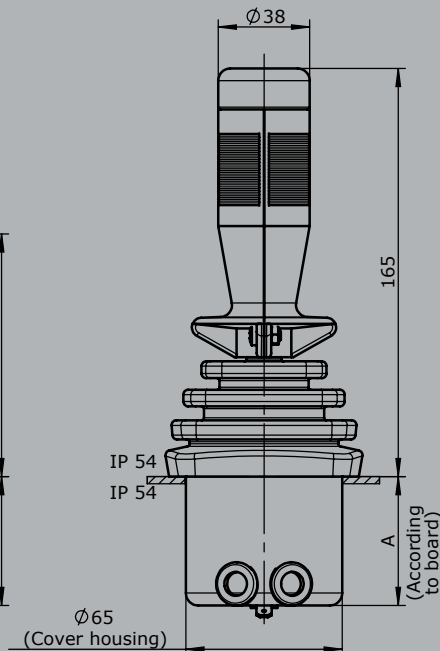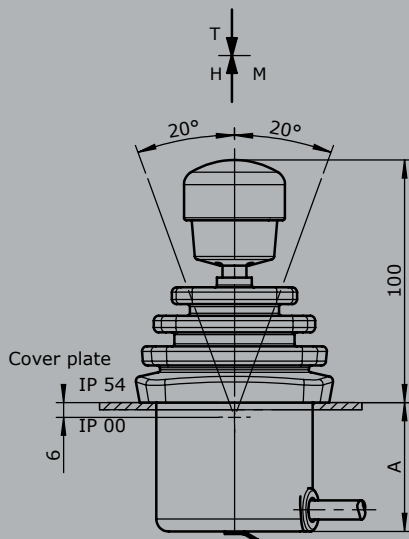

Palm grip B25

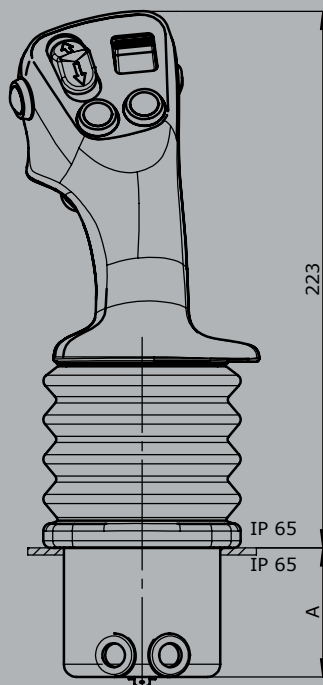

Multi-axis controller V14



The multi-axis controller V14 is a robust switching device for remote control and eletro-hydraulic applications.
The modular design enables the switching device to be used universally.
The V14 is resistant to oil, maritime conditions e.g. offshore / vessels, UV radiation typically from the sun.

Technical data

Mechanical life V14	6 million operating cycles
Operation temperature	-40°C til +60°C
Degree of protection	IP 65



1

	V14L	S8	P	T	Example				
					- 01 Z C	+ 03 R	- A05 C61	+ A110	- X
Basic unit									
V14L 2-axis left									
Control-handle extended									
Standard									
S8 +20 mm									
<i>*Only available in combination with handle!</i>									
Gate									
P Cross gate									
Grip / Palm grip									
T Dead man									
Axis 1 (direction 1-2)									
01 2 contacts (2A 250V AC15)									
Z Spring return									
C Mechanical encoder									
Axis 2 (direction 3-4)									
03 6 contacts (2A 250V AC15)									
R Friction brake									
Description axis 1 (direction 1-2)									
A05 Arrangement MSP 21									
C61 Mechanical encoder MEC 1-2									
Description axis 2 (direction 3-4)									
A110 Arrangement MS 24-0									
Special model									
X Special / customer-specific									


Multi-axis controller V14

Combination possibilities with our ball handles




	V14L	S8	P	T	-	01 Z C	+	03 R	-	A05	C61	+	A110	-	X
Basic unit															
V14.1L 1-axis left															
V14.1R 1-axis right															
V14L 2-axis left															
V14R 2-axis right															
Control-handle extended															
Standard															
S8 +20 mm															
Gate															
P Cross gate															
P X Special gate															
Grip / palm grip															
Knob 25 mm (standard)															
M Mechanical zero interlock															
MH Mechanical zero interlock + signal contact															
T Dead man															
H Signal button															
GK1 Knob 42 mm															
GK1M Mechanical zero interlock															
GK1MN Mechanical zero interlock (push down)															
GK1T Dead man															
GK1H Signal button															
GK1MH Mechanical zero interlock + signal contact															
GK1D Push button															
GK1DV Flush push button															
GSP Twist grip 2x5 kOhm + direction tracks I _{max} = 1 mA															
B... Palm grip B... (see page palm grip 128)*															


Identification of the installation variants with switching directions:




V14.1L



V14L



V14.1R



V14R

*Attention! The multi-axis controller V14 is not suitable for large palm grips (B3, B7/B8, B9...)

	V14L	S8	P	T	-	01 Z C	+	03 R	-	A05	C61	+	A110	-	X
Axis 1: direction 1-2 left / direction 5-6 right															
(Standard contacts gold-plated 2A 250V AC15)															
01 2 contacts															
02 4 contacts															
03 6 contacts															
Standard contact - arrangement see page 106															
z.B.															
A05 MS 21															
A0500 MS 21-00															
A110 MS 24-0															
A99 contact - arrangement according customer request															

Technical details may vary based on configuration or application! Technical data subject to change without notice!

V14L S8 P T - 01 Z C + 03 R - A05 C61 + A110 - X

Z Spring return (included in basic unit!)

R Friction brake

C Mechanical encoder

C61	MEC 1-2	
	EA/02-10	I max. 1 mA
	Potentiometer track	2x10 kOhm
	Direction tack	Arrangement MS 26-0
C62	MEC 1-7	
	EA/10-10	I max. 1 mA
	Potentiometer track	2x5 kOhm
	Direction track	Arrangement MS 26-0-1
C66	MEC 1-10	
	EA/17-10	I max. 10 mA
	Potentiometer track	2x1,5 kOhm
	Direction track	Arrangement MS 21-0+MS21
C63	MEC 1-6	
	EA/09-10	
	6 Bit Gray Code	
C64	MEC 1-6-5	
	ER/36-10	Us=18-30V
	Current output 20...4...20mA	
C65	MEC 1-6-8	
	ER/36-12	Us=18-30V
	Current output 20...0...20mA	
C67	MEC 1-6-9	
	ER/36-11	Us=18-30V
	Voltage output 10...0...10V	

Potentiometer on request!

If both axis identical, it`s enough to describe one axis!

Beispiel: ...A05C61 + A05C61 => A05C61

V14L S8 P T - 01 Z C + 03 R - A05 C61 + A110 - X

Axis 2: direction 3-4 left / direction 7-8 right

(not applicable to V14.1L and V14.1R)

See descripton axis 1!

Special model


X Special / customer-specific

1

Multi-axis controller

V14

1

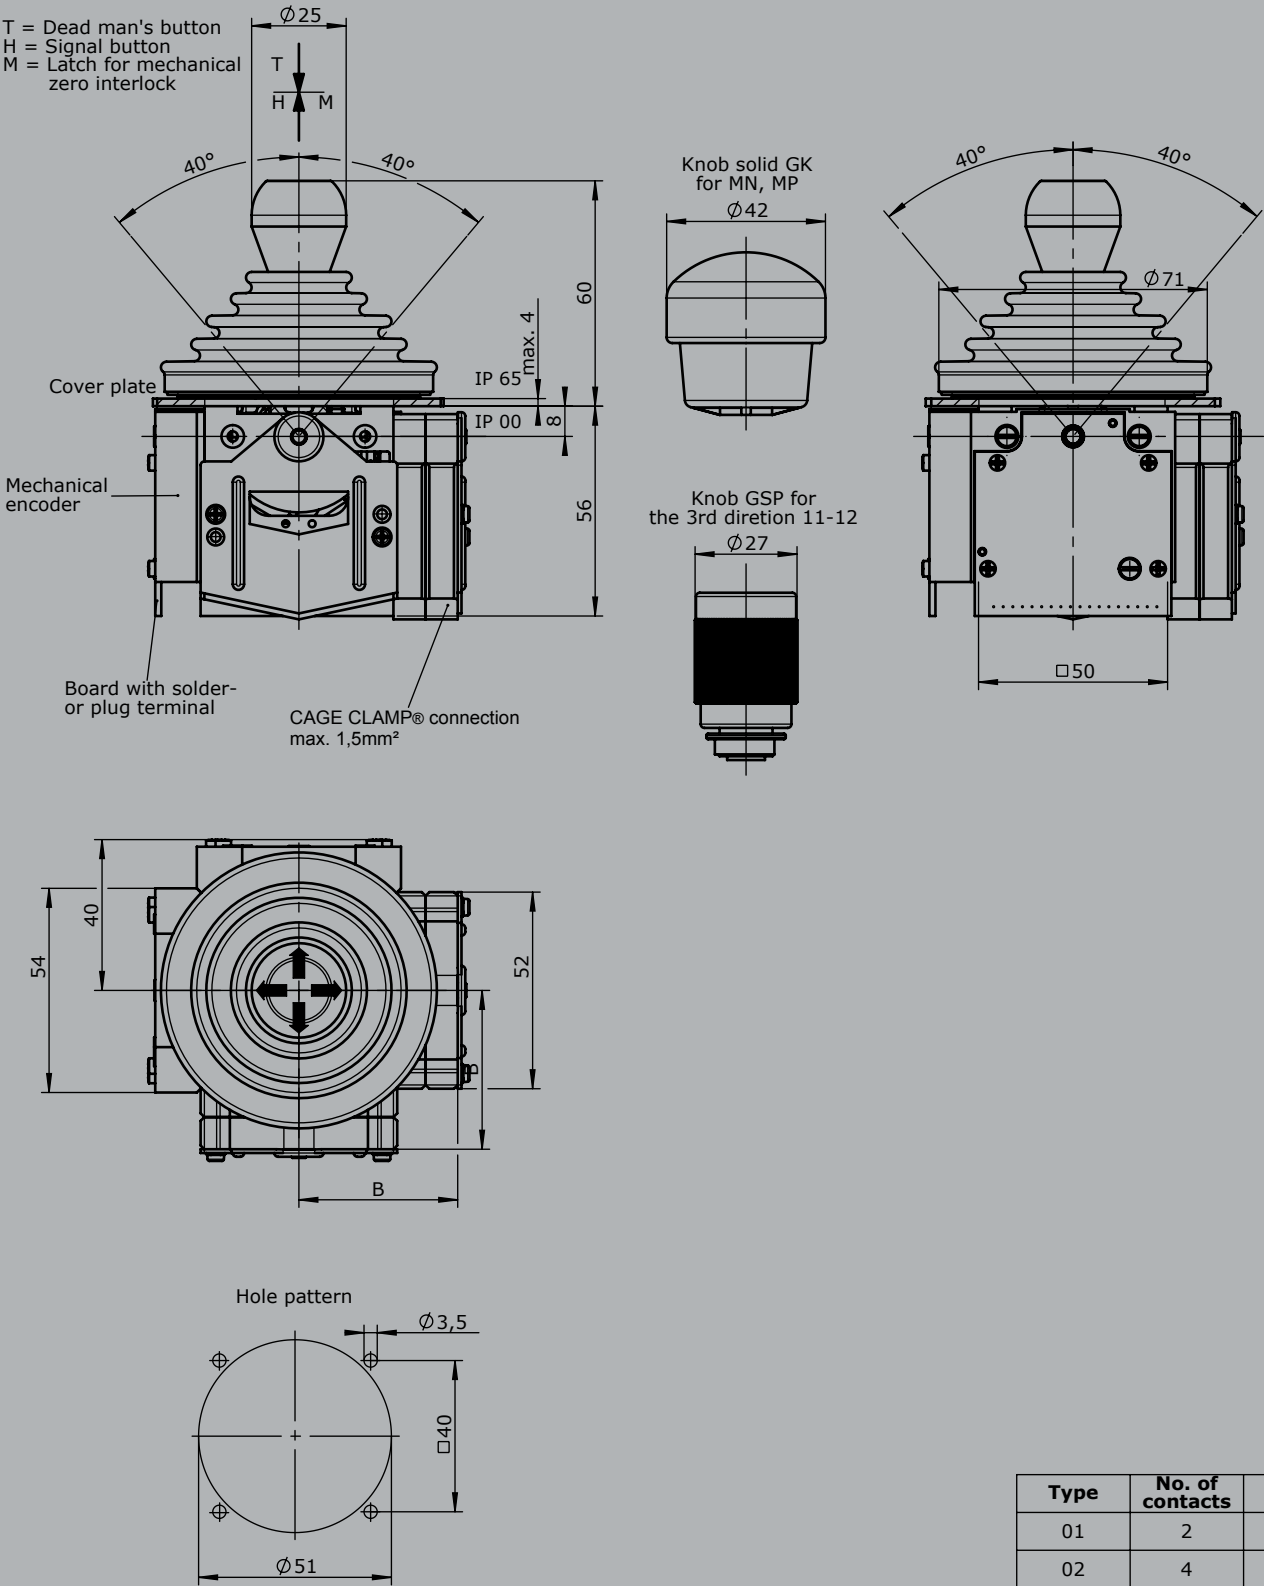

Type	No. of contacts	Dim. B
01	2	36
02	4	45
03	6	54

Multi-axis controller V20

The multi-axis controller V20 is a rugged switching device for remote control.
The multi-axis controller is resistant to oil, maritime conditions e.g. offshore / vessels, UV radiation typically from the sun.

Technical data

Mechanical life V20	3 million operating cycles
Operation temperature	-40°C til +60°C
Degree of protection	IP 65






1




		V20	- P	D	- C71	+ C71	- B	- X
Basic unit								
V20.1	1-axis with spring return							
V20	2-axis with spring return							
V20.1A	1-axis with spring return, IP 67 front							
V20A	2-axis with spring return, IP 67 front							
Gate								
p	Cross gate							
P X	Special gate							
Grip								
	Knob (standard)							
D	Push button							
GSP	Rotation grip 2x5 kOhm + direction tracks I _{max} = 1mA							
Axis 1: direction 1-2								
C70	Mechanical encoder							
	MEC 2-1							
	EA/15-10							
	Potentiometer track							
	Direction track							
C71	Mechanical encoder							
	MEC 2-2							
	EA/11-10							
	Potentiometer track							
	Direction track							
C72	Mechanical encoder							
	MEC 2-5							
	EA/21-10							
	Potentiometer track							
	Direction track							
Axis 2: direction 3-4								
See description axis 1!								
Cover housing								
B	Cover housing KBQ 905 (IP 65)							
Special model								
X	Special / customer-specific							

Technical details may vary based on configuration or application! Technical data subject to change without notice!

V20 Standard degree of protection front IP 65

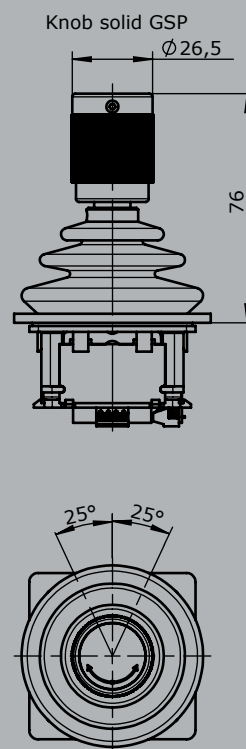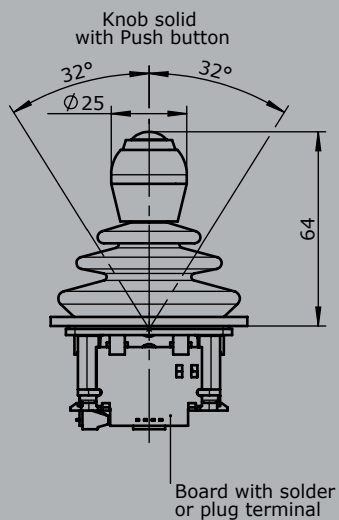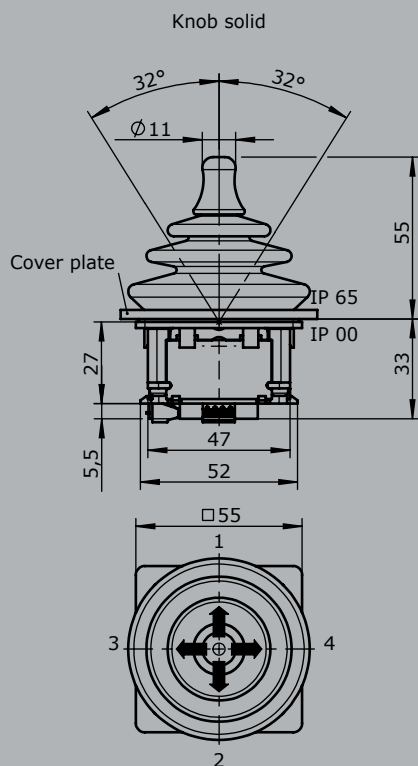

V20 Degree of protection front IP 67

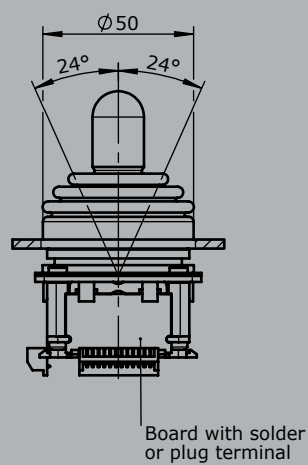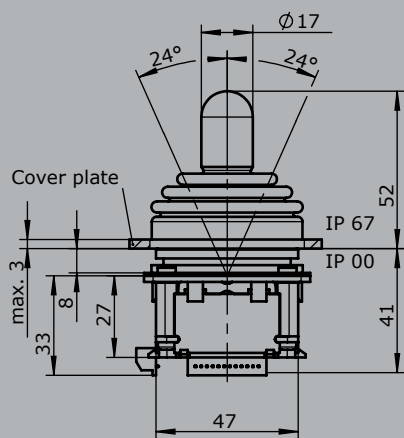

Multi-axis controller V22



The multi-axis controller V22 is a robust switching device for remote control. The multi-axis controller is resistant to oil, maritime conditions e.g. offshore / vessels, UV radiation typically from the sun.

Technical data

Mechanical life V22	3 million operating cycles
Operation temperature	-40°C til +60°C
Degree of protection	IP 65





1



		Example			
		V22A	- P	- E10321	- X
Basic unit					
V22.1A	1-axis with spring return, installation from below				
V22A	2-axis with spring return, installation from below				
V22.1B	1-axis with spring return, installation from top				
V22B	2-axis with spring return, installation from top				
Gate					
P	Cross gate				
P X	Special gate				
Interface					
Voltage output					
E103	1 <input type="checkbox"/> 0,5...2,5...4,5V redundant by Ub=5V				1 axis
	2 <input type="checkbox"/>				2 axis
Characteristic: <u>1</u> = contra rotating, <u>2</u> = concurrently rotating					
Special model					
X	Special / customer-specific				
Attachment					
Mating connector JST 8-pole				5300000260	
Mating connector JST 8-pole with single wire 500 mm long				5300000261	

V22A

Installed from below

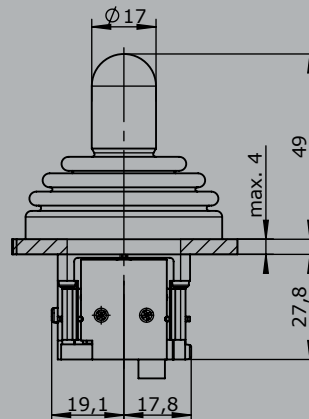
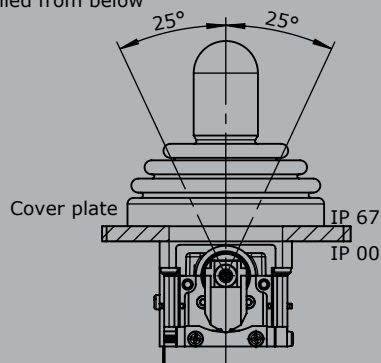


Hole pattern
(installed from below)





V22B

Installed from the top

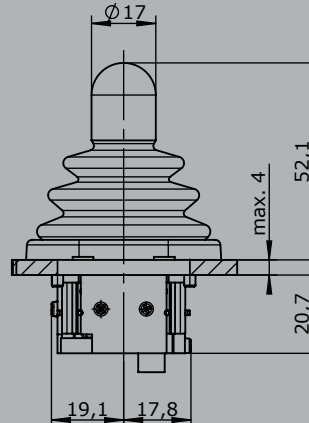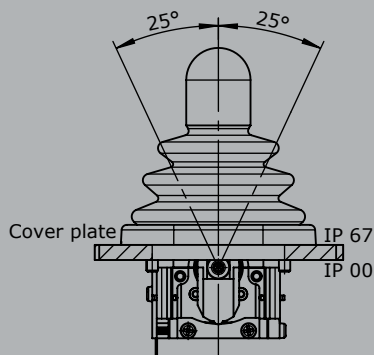

Hole pattern
(installed from the top)



Multi-axis controller V23



The multi-axis controller V23 is a robust switching device for remote control applications. The multi-axis controller is resistant to oil, maritime conditions e.g. offshore / vessels, UV radiation typically from the sun.

Technical data

Mechanical life V23	3 million operating cycles
Operation temperature	-40°C til + 60°C
Degree of protection	IP 67 front





1



	V23A	- P	- C80	+ C80	- X
<i>Example</i>					
Basic unit					
V23.1A	1-axis with spring return, installation from below				
V23A	2-axis with spring return, installation from below				
V23.1B	1-axis with spring return, installation from top				
V23B	2-axis with spring return, installation from top				
Gate					
P	Cross gate				
P X	Special gate				
Axis 1: direction 1-2					
C80	Mechanical encoder				
	MEC 3-1				
	EA/26-10				
	Potentiometer resistance				
	Contact arrangement				
	with 12-pol. JST-connector				
		I max. 1 mA			
		2x5 kOhm			
		Arrangement MS 24			
Axis 2: direction 3-4 (not applicable to V23.1)					
<i>See description axis 1!</i>					
Special model					
X	Special / customer-specific				
Attachment					
Mating connector JST 12-polig <i>(included in delivery!)</i>		5300000263			
Mating connector JST 12-pole with single wire 500 mm long		5300000264			

V23A

Installed from below

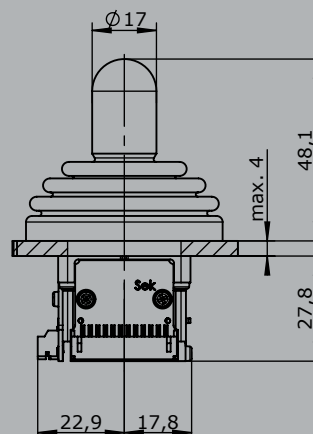
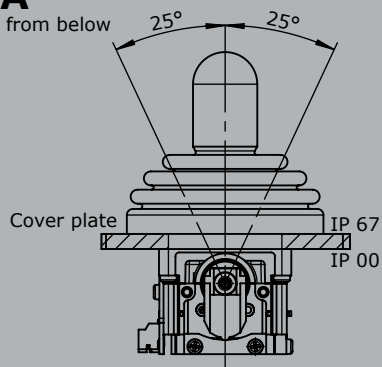


Hole pattern
(installed from below)





V23B

Installed from the top

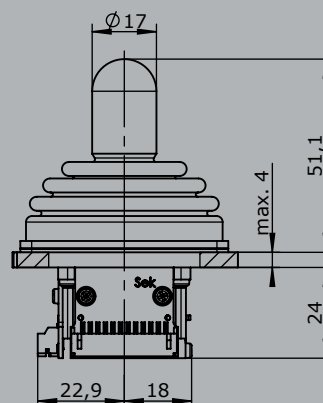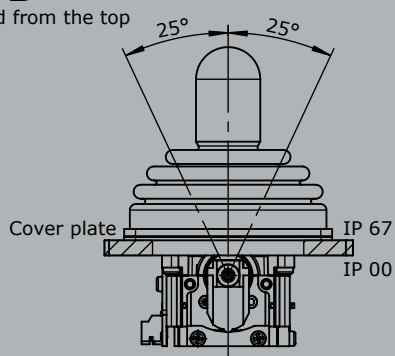

Hole pattern
(installed from the top)



Multi-axis controller V21



The multi-axis controller V21 is a robust hallsensor switching device for electro-hydraulic applications.
The V21 is especially suitable for installation in our ball handles.
The multi-axis controller is resistant to oil, maritime conditions e.g. offshore / vessels, UV radiation typically from the sun.

Technical data


Mechanical life	5 million operating cycles
Operating force	1,6 til 3,5N
Supply voltage	5VDC stabilized
Operation temperature	-40°C til +60°C
Degree of protection	IP 67




1

			V21	Example P	- 1	- E1032	- X
Basic unit							
V21.1	1-axis, installation from top with fixing nut						
V21	2-axis, installation from top with fixing nut						
V21.1A	1-axis, with flange, installation from below						
V21A	2-axis, with flange, installation from below						
V21.1B	1-axis, with flange, installation from top						
V21B	2-axis, with flange, installation from top						
Gate							
P	Cross gate						
P X	Special gate						
Knob							
	Standard						
1	KBAD 980						
Interface							
Voltage output							
E103	1	<input type="checkbox"/>	0,5...2,5...4,5V redundant by Ub=5V	1 axis			
	2	<input type="checkbox"/>		2 axis			
Characteristic: <input type="checkbox"/> = concurrently rotating, <input type="checkbox"/> = contra rotating							
Special model							
X	Special / customer-specific						





Standard
installed from the top

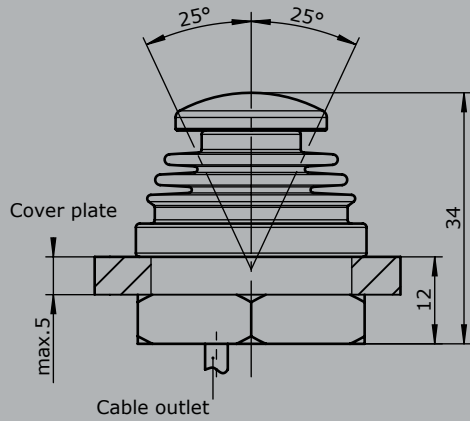


Version A with flange
installed from below

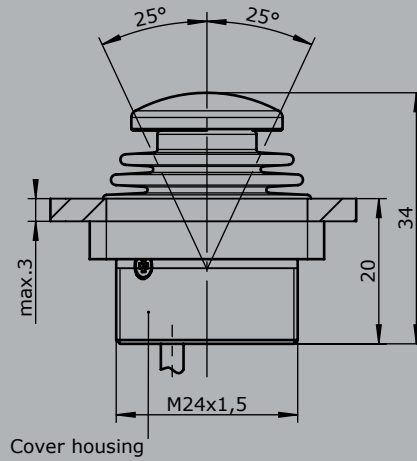


Version B with flange
installed from the top
with actuator KBAD 980

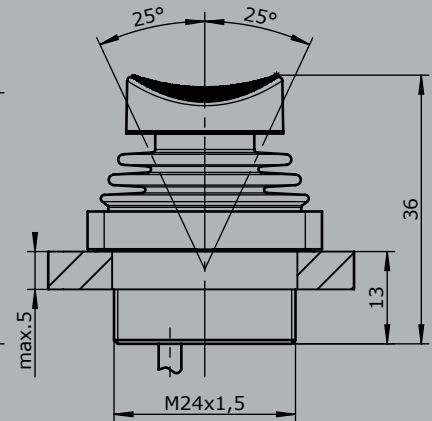


Hole pattern



Hole pattern



Hole pattern



Double-handle controller

D64 / DD64



The double-handle controller D64/DD64 is available in either single-axis or multi-axis options and is a robust controller used commonly in electro-hydraulic applications. The modular design enables the switching device to be used universally. The double-handle controller is resistant to oil, maritime conditions e.g. offshore / vessels, UV radiation typically from the sun.

Technical data

Mechanical life D64	10 million operating cycles
Mechanical life DD64	20 million operating cycles
Operation temperature	-40°C til +60°C
Degree of protection	IP 54 front



1

Example

	D64	S5	Q	/	Q	- 01 Z P	+ 03A R C	- A05 P134	+ A110 C01	- X
Basic unit										
D64										
Control-handle extended										
S5 -20 mm										
Grip- control handle left										
Q T-grip										
Grip- control handle right										
Q T-grip										
Axis 1 (direction 1-2)										
01 2 contacts (2A 250V AC15)										
Z Spring return										
P Potentiometer										
Axis 2 (direction 3-4)										
03A 6 contacts (4A 250V AC15)										
R Friction brake										
C Opto-electronical encoder										
Description axis 1 (direction 1-2)										
A05 Arrangement MSP 21										
P134 Potentiometer T396 2x5 kOhm										
Description axis 2 (direction 3-4)										
A110 Arrangement MSP 24-0										
C01 OEC 2-1-1										
Special model										
X Special / customer-specific										

Double-handle controller


D64 / DD64

Combination possibilities with our ball handles



	D64	S5	Q	/	Q	- 01 Z P	+ 03 A R C	- A05	P134	+ A110	C01	- X
Basic unit												
D64												
reinforced version												
DD64												
Control-handle long*												
Standard 180 mm												
S5 -20 mm												
S8 +20 mm												
<i>*Only in combination with knob!</i>												
Grip- control handle left												
Knob												
M Mechanical zero interlock												
T Dead man												
H Signal button												
D Push button												
DV Flush push button												
Q T-grip												
QM T-grip with mechanical zero interlock												
QMH T-grip with mechanical zero interlock + signal contact												
QH T-grip + signal button												
QD T-grip + push button side												
B10 Palm grip B10... (see page 143)												
Grip- control handle right												
Knob												
M Mechanical zero interlock												
T Dead man												
H Signal button												
D Push button												
DV Flush push button												
Q T-grip												
QM T-grip with mechanical zero interlock												
QMH T-grip with mechanical zero interlock + signal contact												
QH T-grip with signal button												
QD T-grip push button side												
B10... Palm grip B10... (see page 143)												

Identification of the installation variants with switching directions:



D64 / DD64

Double-handle controller

D64 / DD64

D64L S5 Q / Q - 01 Z P + 03 A R C - A05 P134 + A110 C01 - X

Axis 1: direction 1-2

(Standard contacts gold-plated 2A 250V AC15)

01	<input type="checkbox"/>	2 contacts	Standard contacts - see arrangement page 106	
02	<input type="checkbox"/>	4 contacts	z.B.	
03	<input type="checkbox"/>	6 contacts	A980	MS 00
04	<input type="checkbox"/>	8 contacts	A05	MS 21
05	<input type="checkbox"/>	10 contacts	A0500	MS 21-00
06	<input type="checkbox"/>	12 contacts	A110	MS 24-0
<input checked="" type="checkbox"/> = silver contact (4A 250V AC15)			A99 contact - arrangement according customer request	

Z Spring return

R Friction brake

(P) Mounting options for potentiometer and encoder (Gessmann-types)

P	Potentiometer	P131	T396 2x0,5 kOhm	I max. 1 mA
		P132	T396 2x1 kOhm	I max. 1 mA
		P133	T396 2x2 kOhm	I max. 1 mA
		P134	T396 2x5 kOhm	I max. 1 mA
		P135	T396 2x10 kOhm	I max. 1 mA
More potentiometer on demand!				

C Encoder C... Encoder see page 118

If both axis identical, it's enough to describe one axis!
example: A05P134 + A05P134 => A05P134

D64 S5 Q / Q - 01 Z P + 03 A R C - A05 P134 + A110 C01 - X

Axis 2: direction 3-4

(Standard contacts gold plated 2A 250V AC15)

01	<input type="checkbox"/>	2 contacts	Standard contact - see arrangement on page 106	
02	<input type="checkbox"/>	4 contacts	z.B.	
03	<input type="checkbox"/>	6 contacts	A980	MS 00
04	<input type="checkbox"/>	8 contacts	A05	MS 21
05	<input type="checkbox"/>	10 contacts	A0500	MS 21-00
06	<input type="checkbox"/>	12 contacts	A110	MS 24-0
<input checked="" type="checkbox"/> = silver contacts (4A 250V AC15)			A99 contact - arrangement according customer request	

Z Spring return

R Friction brake

(P) Mounting options for potentiometer and encoder (Gessmann-types)

P	Potentiometer	P131	T396 2x0,5 kOhm	I max. 1 mA
		P132	T396 2x1 kOhm	I max. 1 mA
		P133	T396 2x2 kOhm	I max. 1 mA
		P134	T396 2x5 kOhm	I max. 1 mA
		P135	T396 2x10 kOhm	I max. 1 mA
More potentiometer on demand!				

C Encoder C... Encoder see page 118

Double-handle controller

D64 / DD64



D64 S5 Q / Q - 01 Z P + 03 A R C - A05 P134 + A110 C01 - X

Special model	
X	Special / customer-specific

Attachment	
	Indicating labels
	Indicating labels engraved

1



Double-handle controller

D64 / DD64




T = Dead man's button
H = Signal button
M = Latch for mechanical
zero interlock

Knob solid
D= Push button

T - grip
D = Push button

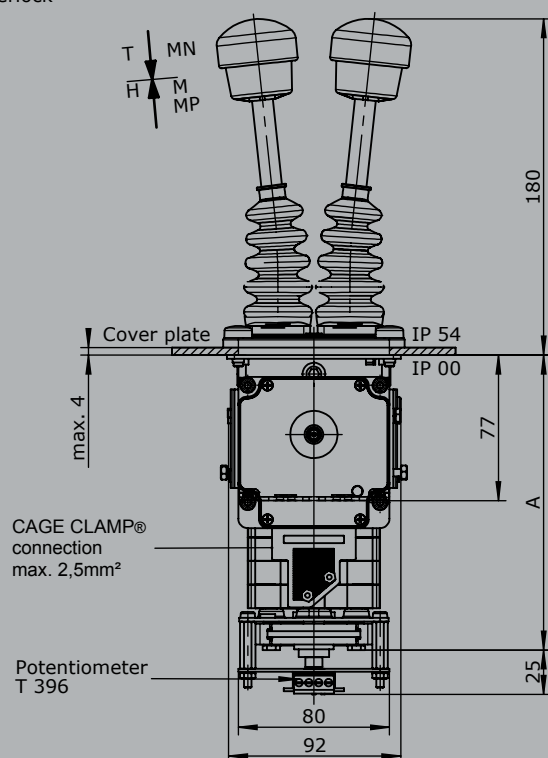

To build in:
Direction 1-2
Direction 3-4

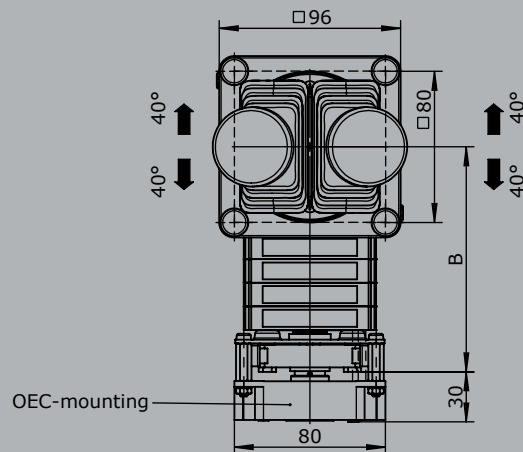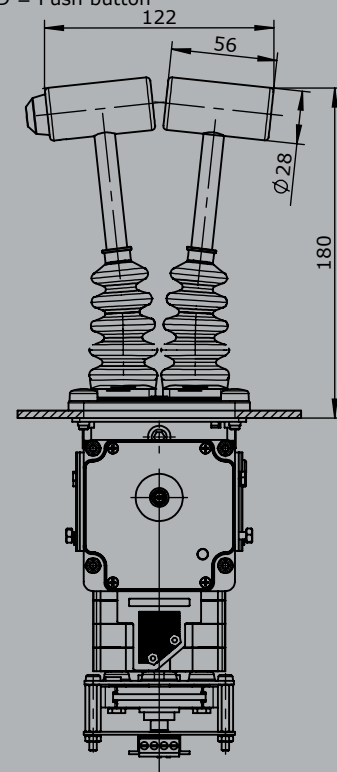

Type	No. of contacts	Dim. A	Dim. B
01	2	119	82
02	4	131	94
03	6	144	107
04	8	156	119
05	10	169	132
06	12	181	144

Double-handle controller D8



The double-handle controller D8 is a robust switching device for the hoisting applications. The modular design enables the switching device to be used universally. The double-handle controller is resistant to oil, maritime conditions e.g. offshore /vessels, UV radiation typically from the sun.



Technical data

Mechanical life D8	10 million operating cycles
Operation temperature	-40°C til +60°C
Degree of protection	IP 54 front


		D8	S5	Q / Q	- 2ZP	+ 3 RP	- B	- A05 P184	+ A050 P184	- E9012	- X
<i>Example</i>											
Basic unit											
D8											
Control-handle extended											
S5	-20 mm										
Grip- control-handle left											
Q	T-grip										
Grip- control-handle right											
Q	T-grip										
Axis 1 (direction 1-2)											
2	2 contacts (1,5A 24VDC13)										
Z	Spring return										
P	Potentiometer										
Axis 2 (direction 3-4)											
3	3 contacts (1,5A 24VFC13)										
R	Friction brake										
P	Potentiometer										
Cover housing											
B	Cover housing										
Description axis 1 (direction 1-2)											
A05	Arrangement MSP 21										
P184	Potentiometer T301 2x5 kOhm										
Description axis 2 (direction 3-4)											
A050	Arrangement MSP 21-0										
P184	Potentiometer T301 2x5 kOhm										
Interface											
E9012	Potentiometer output for proportional valve PVG32										
Special model											
X	Special / customer-specific										

Technical details may vary based on configuration or application! Technical data subject to change without notice!

Double-handle controller

D8

	D8	S5	Q / Q	- 2 Z P	+ 3 R P	- B	- A05	P184	+ A050	P184	- E9012	- X
Basic unit												
D8												
Control-handle extended*												
Standard 160 mm												
S5 -20 mm												
S8 +20 mm												
<i>*Only in combination with knob!</i>												
Grip- control-handle left												
Knob												
M Mechanical zero interlock												
T Dead man												
H Signal button												
D Push button												
Q T-grip												
QD T-grip with push button side												
B10... Palm grip B10... (see page 143)												
Grip- control-handle right												
Knob												
M Mechanical zero interlock												
T Dead man												
H Signal button												
D Push button												
Q T-grip												
QD T-grip with push button side												
B10... Ball handle B10... (see page 143)												



1

	D8	S5	Q / Q	- 2 Z P	+ 3 R P	- B	A05	P184	+ A050	P184	- E9012	- X
Axis 1: direction 1-2 left												
1 1 contact												
2 2 contacts												
3 3 contacts												
Z Spring return												
R Friction brake												
(P) Mounting options for potentiometer and encoder (Gessmann-types)												
P Potentiometer												
	P181	T301	2x0,5 kOhm	I max. 1 mA								
	P182	T301	2x1 kOhm	I max. 1 mA								
	P183	T301	2x2 kOhm	I max. 1 mA								
	P184	T301	2x5 kOhm	I max. 1 mA								
	P185	T301	2x10 kOhm	I max. 1 mA								
	<i>More potentiometer on demand!</i>											
Hall-potentiometer	P43	T1360	0,5...2,5...4,5V / 4,5...2,5...0,5V									

Technische Angaben können je nach Konfiguration oder Einsatzfall abweichen! Technische Änderungen vorbehalten!

Double-handle controller

D8

Combination possibilities with our ball handles



1

If both axis identical, it's enough to describe one axis!
example:...A05P184 + A05P184 => A05P184

D8 S5 Q / Q - 2 Z P + 3 R P - B A05 P184 + A050 P184 - E9012 - X

Axis 2: direction 3-4				
1	1 contacts	Standard contact - arrangement see page 106 z.B. A98 A05 A050 <i>A99 contact - arrangement for customer request</i>		
2	2 contacts			
3	3 contacts			
Z	Spring return			
R	Friction brake			
(P)	Mounting options for potentiometer and encoder (Gessmann-types)			
P	Potentiometer	P181	T301 2x0,5 kOhm	I max. 1 mA
		P182	T301 2x1 kOhm	I max. 1 mA
		P183	T301 2x2 kOhm	I max. 1 mA
		P184	T301 2x5 kOhm	I max. 1 mA
		P185	T301 2x10 kOhm	I max. 1 mA
		<i>More potentiometer on demand!</i>		
	Hall-Potentiometer	P43	T1360	0,5...2,5...4,5V / 4,5...2,5...0,5V

D8 S5 Q / Q - 2 Z P + 3 R P - B A05 P184 + A050 P184 - E9012 - X


Cover housing			
B	Cover housing		
Interface			
E901	1	Potentiometer output for proportional valve PVG32 0,25...0,5...0,75Us	1 axis
	2		2 axis
Special model			
X	Special / customer-specific		

Double-handle controller


D8

1

T = Dead man's button
H = Signal button
M = Latch for mechanical
zero interlock



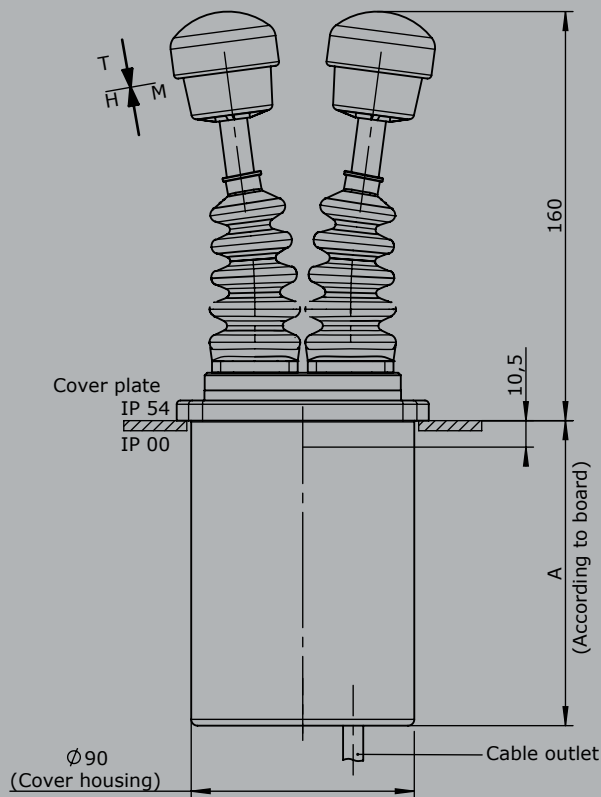


Knob solid
D = Push button



To build in:
Direction 1-2
Direction 3-4

T - grip
D = Push button

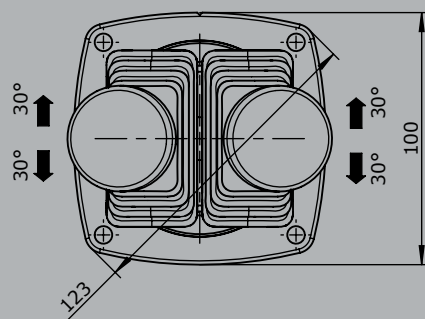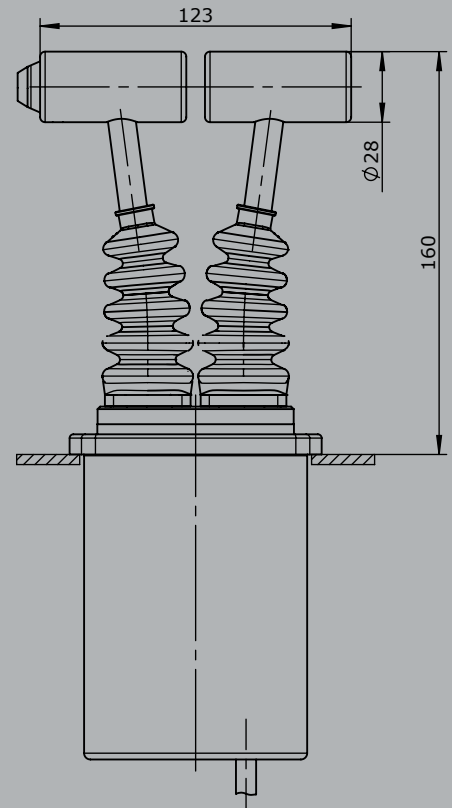

Double-handle controller D85



The double-handle controller D85 is a robust switching device for hoisting applications. The modular design enables the switching device to be used universally. The double-handle controller is resistant to oil, maritime conditions e.g. offshore /vessels, UV radiation typically from the sun.



Technical data

Mechanical life D85	8 million operating cycles
Operation temperature	-40°C til +60°C
Degree of protection	IP 54 front

	D85	S5	Q	/	Q	-	Z	+	R	-	B	-	E...	-	X
Basic unit															
D85															
Control-handle extended															
Standard 160 mm															
S5 -20 mm															
S8 +20 mm															
<i>*Only available in combination with handle!</i>															
Grip- control-handle left															
Knob															
M Mechanical zero interlock															
T Dead man															
H Signal button															
D Push button															
Q T-grip															
QD T-grip with push button side															
B10... Palm grip B10... (see page 143)															
Grip- control-handle right															
see grip-control-handle left															
Axis 1: direction 1-2 left															
Z Spring return															
R Friction brake															
Axis 2: direction 3-4 left															
Z Spring return															
R Friction brake															
Cover housing															
B Cover housing															
Interface (description see following pages)															
E1xx Voltage output															
E2xx Current output															
E3xx CAN-interface															
E4xx CANOpen Safety interface															
Special model															
X Special/ customer-specific															

Technical details may vary based on configuration or application! Technical data subject to change without notice!

Double-handle controller D85

Voltage outputs (not stabilized)

Supply voltage	4,75-5,25VDC		
Mounting depth A	105 mm		
Wiring	Cable 500 mm long with plug (male) CPC 17 - 14-pole		
0,5...2,5...4,5V with 2 direction contacts per axis			
	1 axis	E102	1
	2 axis		2

Voltage output

Supply voltage	9-32VDC (*11,5-32)		
Mounting depth A	105 mm		
Wiring	Cable 500 mm long with plug (male) CPC 17 - 14-pole 2. cable (for grip function) 500 mm long with plug (female) CPC 17 - 14-pole		
0,5...2,5...4,5V + 2 direction contacts per axis			
	1 axis	E110	1
	2 axis		2
0...5...10V + 2 direction contacts per axis			
	1 axis	E130	1
	2 axis		2
10...0...10V + 2 direction contacts per axis			
	1 axis	E144	1
	2 axis		2
<i>Voltage output with other value on request!</i>			

Current outputs

Supply voltage	9-32VDC		
Mounting depth A	105 mm		
Wiring	Cable 500 mm long with plug (male) CPC 17 - 14-pole 2. cable (for grip function) 500 mm long with plug (female) CPC 17 - 14-pole		
0...10...20 mA + 2 direction contacts per axis			
	1 axis	E202	1
	2 axis		2
20...0...20 mA + 2 direction contacts per axis			
	1 axis	E220	1
	2 axis		2
4...12...20 mA + 2 direction contacts per axis			
	1 axis	E210	1
	2 axis		2
20...4...20 mA + 2 direction contacts per axis			
	1 axis	E221	1
	2 axis		2
<i>Voltage output with other value on request!</i>			

Double-handle controller D85

CAN		
Supply voltage	9-36VDC	
Idle current consumption	120 mA	
Mounting depth A	105 mm (Expansion stage 1)	
	105 mm (Expansion stage 2)	
	120 mm (Expansion stage 3)	
Protocol	CANOpen CiA DS 301 or SAE J 1939	
Baudrate	125 kBit/s til 1 Mbit/s	
Output value	0...128...255	
Wiring	CAN (IN) cable 500 mm with plug M12 (male)	
	CAN (OUT) cable 500 mm with plug M12 (female)	
	External in-/outputs cable 500 mm with plug connector CPC 23-37 (female)	
CAN expansion stage 1		E304 1 <input type="checkbox"/>
- 3 analog joystick axis		
- 14 digitale joystick functions		
or 10 digital joystick functions + 4 LED-outputs		
CAN expansion stage 2		E305 1 <input type="checkbox"/>
- 5 analog joystick axis		
- 14 digital joystick functions		
- Input for capacitive sensor		
<i>*external LED-outputs can be used in the grip for LED`s!</i>		
with additional external in-/output		
- 4 external LED-outputs, 8 external digital inputs		2 <input type="checkbox"/>
CAN expansion stage 3		E306 1 <input type="checkbox"/>
- 8 analog joystick axis		
- 14 digital joystick functions		
- Input for capacitive sensor		
<i>*external LED-outputs can be used in the grip for LED`s!</i>		
with additional external in-/outputs		
- 8 external LED-outputs, 8 external digital inputs		2 <input type="checkbox"/>
- 8 external LED-outputs, 16 external digital inputs		3 <input type="checkbox"/>
- 24 external digital inputs		4 <input type="checkbox"/>
- 8 external LED-outputs, 24 external digital inputs		5 <input type="checkbox"/>
with additional contact equipment separately wired (not CAN)		
- 2 direction contacts + 1 zero position contact (not potential-free) per axis		1 <input type="checkbox"/>
- 1 zero position contact (potential-free) per axis		2 <input type="checkbox"/>

Profibus DP		
Supply voltage	18-30VDC	
Baudrate	til 12MBit/s	
Output value	0...128...255	
Mounting depth A	105 mm	
Wiring	Profibus, cable 100 mm with plug D-Sub 9	
	Power supply (contact wiring) cable 500 mm with plug connector CPC 13-9 (male)	
	External in-/outputs, cable 500 mm with plug connector CPC 23-37 (female)	

Double-handle controller D85

Profibus DP

- 4 analog joystick axis
- 16 digital joystick function
- Input for capacitive sensor

**external LED-outputs can be used in the grip for LED`s!*

with additional external in-/outputs

- 8 external LED-output, 8 external digital input
- 16 externe LED-output, 16 external digital input

E501 1 ☐

2 ☐

3 ☐

With additional contact equipment separately wired (not profibus)

- 2 direction contact + 1 zero position contact (not potential-free) per main-axis
- 1 zero position contact (potential free) per main-axis

1 ☐

2 ☐

Other outputs

Voltage output für PVG32 0,25...0,5...0,75Us, power supply 12 VDC

Wiring Cable 500 mm long with plug CPC 17-14 (male)

1 axis E902 1 ☐

2 axis 2 ☐

3 axis 3 ☐

4 axis 4 ☐

With additional direction contacts per main-axis

4 ☐

Voltage output für PVG32 0,25...0,5...0,75Us, power supply 12 VDC

Wiring Cable 500 mm long with plug CPC 17-14 (male)

1 axis E906 1 ☐

2 axis 2 ☐

3 axis 3 ☐

4 axis 4 ☐

With additional direction contacts per main-axis

4 ☐

8 Bit Gray-Code with direction signals per main-axis, supply voltage 9-36 VDC

Wiring 1 cable 500 mm with plug CPC 23-37 (female) axis 1-2

1 cable 500 mm with plug CPC 23-37 (female) axis 3-4

1 axis E903 1 ☐

2 axis 2 ☐

3 axis 3 ☐

4 axis 4 ☐

8 Bit Binär-Code with direction signals per main-axis, supply voltage 9-36 VDC

Wiring 1 cable 500 mm with plug CPC 23-37 (female) axis 1-2

1 cable 500 mm with plug CPC 23-37 (female) axis 3-4

1 axis E904 1 ☐

2 axis 2 ☐

3 axis 3 ☐

4 axis 4 ☐

Double-handle controller D85

Special model

Mating connector AMP CPC 17 14-pole (male insert)	5300000209
Mating connector AMP CPC 17 14-pole (male insert) with 2 m cable	5300000210
Mating connector AMP CPC 17 14-pole (female contact)	5300000211
Mating connector AMP CPC 17 14-pole (female contact) with 2 m cable	5300000213
Mating connector AMP CPC 23 37-pole (male insert)	5300000214
Mating connector AMP CPC 23 37-pole (male insert) with 2 m cable	5300000215
Mating connector AMP CPC 23 37-pole (female contact)	5300000216
Mating connector AMP CPC 23 37-pole (female contact) with 2 m cable	5300000217
Mating connector (CAN) M12 (male insert) with 2 m cable	20201140
Mating connector (CAN) M12 (female contact) with 2 m cable	20202298
Mating connector (Profibus) straight	22201440
Mating connector (Profibus) 90° angled	22201741



Double-handle controller

D85



T = Dead man's button
H = Signal button

Knob solid
D = Push button


T - grip
D = Push button

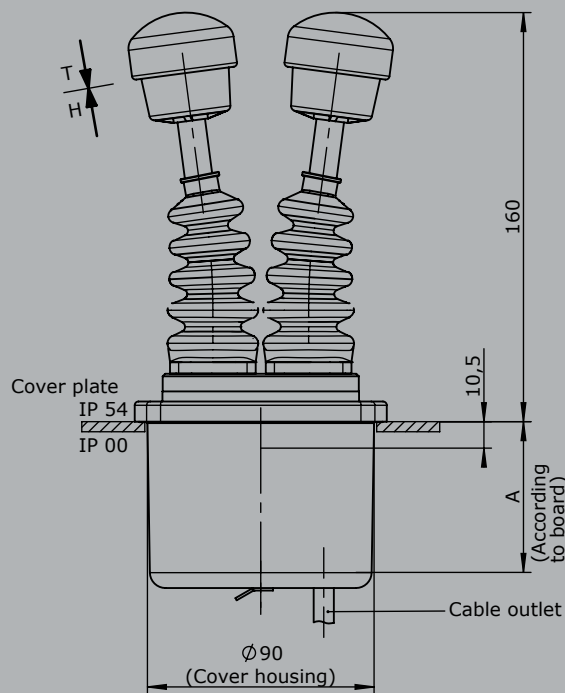

To build in:
Direction 1-2
Direction 3-4

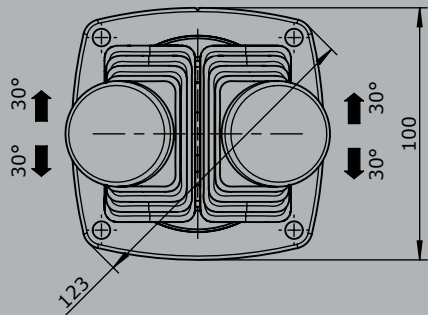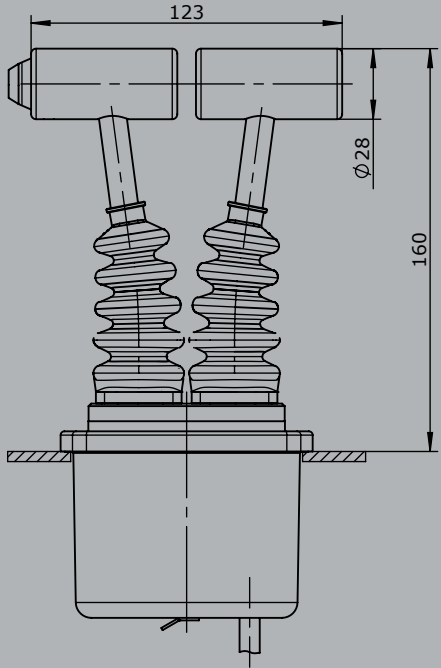

Hole pattern



Double-handle controller D3



The double-handle controller D3 is a robust switching device for nautical navigation applications. The modular design enables the switching device to be used universally. The double-handle controller is resistant to oil, maritime conditions e.g. offshore /vessels, UV radiation typically from the sun.



1 Technical data

Mechanical life D3	12 million operating cycles
Operation temperature	-40°C til +60°C
Degree of protection	IP 66 front

		Example									
		D3	S5	Q / Q	- 2 R P	+ 3 R P	- B	- A05 P214	- A050 P214	- E1292	- X
Basic unit											
D3											
Control-handle extended											
S5	-20 mm										
Grip- control handle left											
Q	T-grip										
Grip- control handle right											
Q	T-grip										
Axis 1 (direction 1-2)											
2	2 contacts (1,5A 24VDC13)										
R	Friction brake										
P	Potentiometer										
Axis 2 (direction 3-4)											
3	3 contacts (1,5A 24VDC13)										
R	Friction brake										
P	Potentiometer										
Cover housing											
B	Cover housing										
Description axis 1 (direction 1-2)											
A05	Arrangement MSP 21										
P214	Potentiometer T246 2x5kOhm										
Description axis 2 (direction 3-4)											
A050	Arrangement MSP 21-0										
P214	Potentiometer T246 2x5kOhm										
Interface											
E1292	Voltage output 0...5...10V										
Special model											
X	Special / customer-specific										

Technical details may vary based on configuration or application! Technical data subject to change without notice!

D3

Combination possibilities with our ball handles

D3

1	1 contact	Standard contact- arrangement see page 106		
2	2 contacts	z.B.		
3	3 contacts	A98	MS 0	
		A05	MS 21	
		A050	MS 21-0	
		<i>A99 contact - arrangement according customer request</i>		
R	Friciton brake			
(P)	Mounting options for potentiometer and (Gessmann-types)			
P	Potentiometer	P211	T246 2x0,5 kOhm	I max. 1 mA
		P212	T246 2x1 kOhm	I max. 1 mA
		P214	T246 2x5 kOhm	I max. 1 mA
		P215	T246 2x10 kOhm	I max. 1 mA
		<i>More potentiometer on demand!</i>		
	Hall-Potentiometer	P42	T1003	0,5...2,5...4,5V / 4,5...2

Double-handle controller D3

If both axis identical, it's enough to describe one axis!
example: ...A05P214 + A05P214 => A05P214

D3 S5 Q / Q - 2 R P + 3 R P - B - A05 P214 + A050 P214 - E1292 - X

Axis 2: direction 3-4 left

1	1 contact	Standard contact- arrangement see page 106		
2	2 contacts	z.B.		
3	3 contacts	A98	MS 0	
		A05	MS 21	
		A050	MS 21-0	
		A99 contact - arrangement according customer request		
R	Friction brake			
(P)	Mounting options for potentiometer (Gessmann-types)			
P	Potentiometer	P211	T246 2x0,5 kOhm	I max. 1 mA
		P212	T246 2x1 kOhm	I max. 1 mA
		P214	T246 2x5 kOhm	I max. 1 mA
		P215	T246 2x10 kOhm	I max. 1mA
		More potentiometer on demand!		
	Hall-Potentiometer	P43	T1003	0,5...2,5...4,5V/4,5...2,5...0,5V

D3 S5 Q / Q - 2 R P + 3 R P - B - A05 P214 + A050 P214 - E1292 - X

Cover housing

B Cover housing

Interface (description the following pages)

Potentiometer output
E1xx Voltage output
E2xx Current output

Special model

X Special / customer-specific

Voltage outputs

Supply voltage 11,5-32VDC
Wiring Cable 500 mm long with plug (male) CPC 17 - 14-pole

0...5...10V per axis

1 axis	E129 1	<input type="checkbox"/>
2 axis	2	<input type="checkbox"/>

10...0...10V per axis

1 axis	E141 1	<input type="checkbox"/>
2 axis	2	<input type="checkbox"/>

-10...0...+10V per axis

1 axis	E140 1	<input type="checkbox"/>
2 axis	2	<input type="checkbox"/>

Voltage output with other value on request!

Technical details may vary based on configuration or application! Technical data subject to change without notice!

Double-handle controller

D3

Current outputs

Supply voltage	18-36VDC		
Wiring	Cable 500 mm long with plug (male) CPC 17 - 14-pole		
4...12...20 mA per axis		1 axis	E209 1
20...4...20 mA per axis		1 axis	E217 1




Attachment

Mating connector AMP CPC 17 14-pole (female contact)	5300000211	
Mating connector AMP CPC 17 14-pole (female contact) with 2 m cable	5300000213	


1

Double-handle controller D3

T- grip
D=Push button

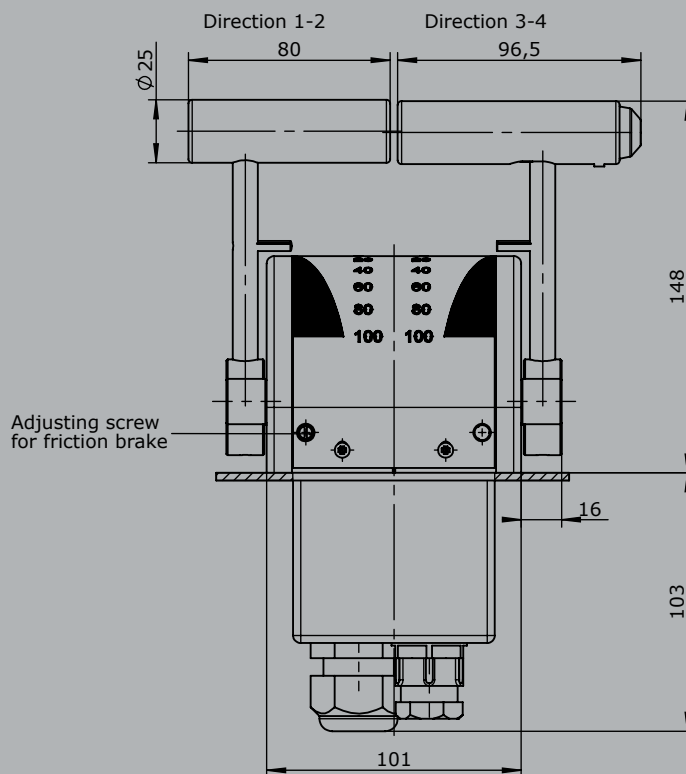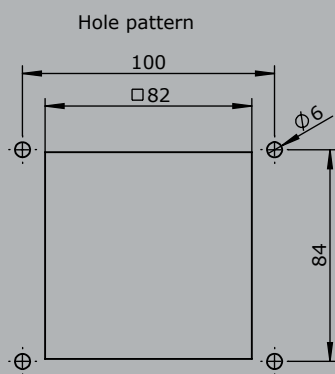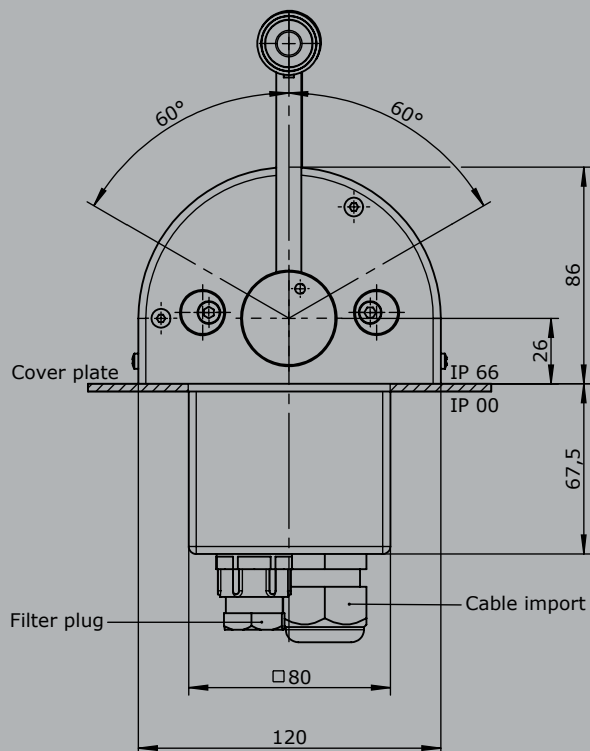

Knob solid
D= Push button

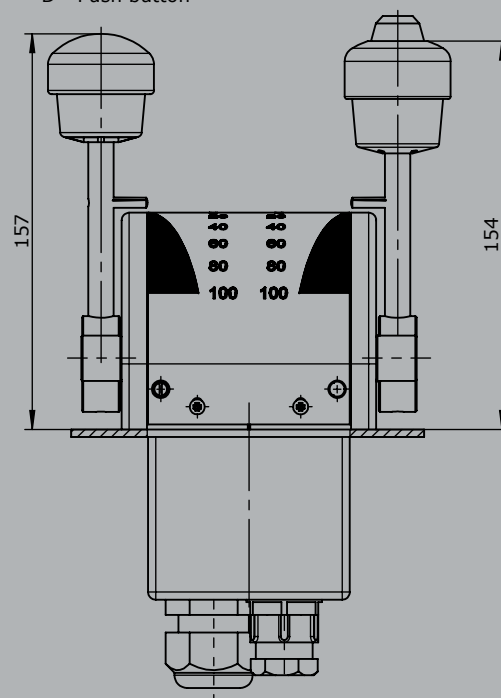

Single-axis controller

S1



The single-axis controller S1 is a robust switching device for remote control and electro-hydraulic applications. The modular design of the switching device is universally applicable. The single-axis controller is resistant to oil, maritime conditions e.g. offshore /vessels, UV radiation typically from the sun.

Technical data

Mechanical life S1	6 million operating cycles
Operating temperature	-40°C til +60°C
Degree of protection	IP 65



	S1	T	- 2 Z P	- A05 P374	- X
<i>Example</i>					
Basic unit					
S1 1-axis					
Grip / palm grip					
T Dead man					
Axis 1 (direction 1-2)					
2 2 contacts (1,5A 24V DC13)					
Z Spring return					
P Potentiometer					
Description axis 1 (direction 1-2)					
A05 Arrangement MSP 21					
P374 Potentiometer T 375 2x5 kOhm					
Special model					
X Special / customer-specific					

Single-axis controller S1

S1 T - 2 Z P - A05 P374 - X

Basic unit

S1 1-axis

Grip / palm grip

Knob (standard)
M Mechanical zero interlock
T Dead man
D Push button
GS8 Knob GS8

S1 T - 2 Z P - A05 P374 - X

Axis 1: direction 1-2 left

1 1 contact
2 2 contacts
3 3 contacts
4 4 contacts

Standard contact - arrangement see page 106
z.B.
A05 MS 21
A050 MS 21-0
A060 MS 22-0
A99 contact - arrangement according customer request

Z Spring return (included in basic unit!)

R Friction brake

P Potentiometer

P372	T375	2x1 kOhm	I max. 1 mA
P374	T375	2x5 kOhm	I max. 1 mA
P274	T430	2x5 kOhm	I max. 1 mA

with direction track


S1 T - 2 Z P - A05 P374 - X

Special model

X Special / customer-specific

Single-axis controller S1

T = Dead man's button

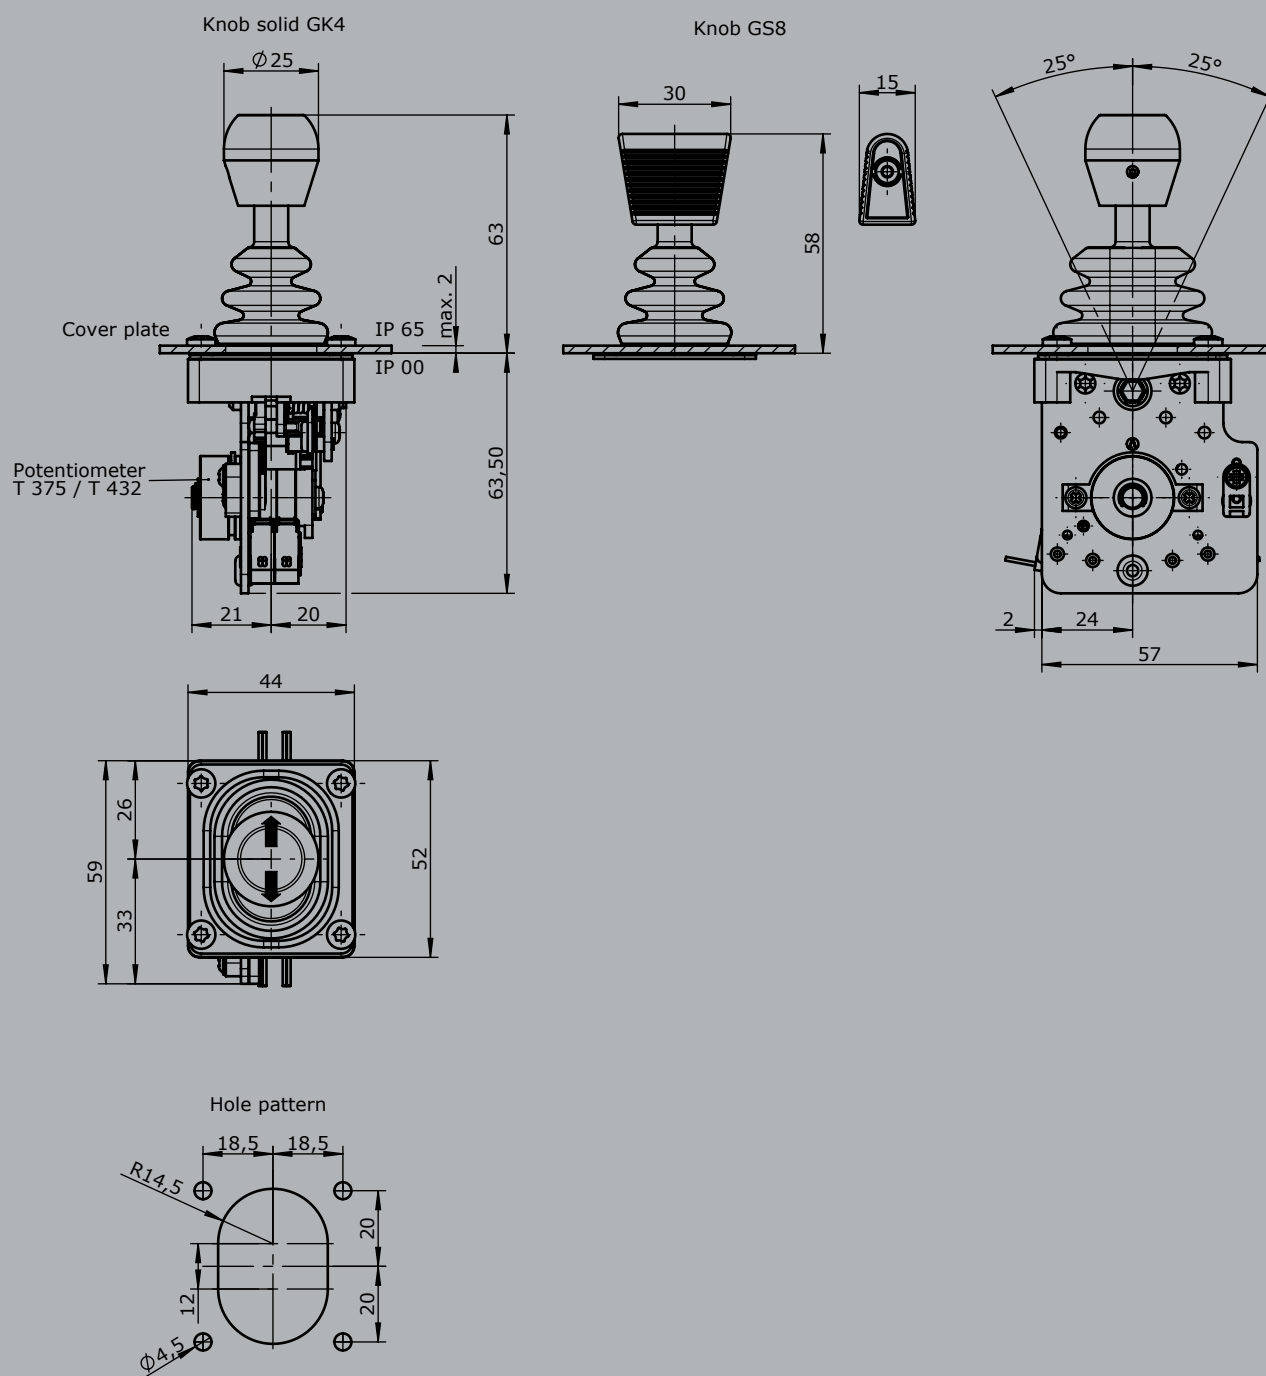

Single-axis controller S11



The single-axis controller S11 is a hall sensor switching device designed for electro-hydraulic and remote controlled hydraulic.
The modular design of the switching device is universally applicable.
The single-axis controller is resistant to oil, maritime conditions e.g. offshore /vessels, UV radiation typically from the sun.




1 Technical data

Mechanical life S11	6 million operating cycles
Operating temperature	-40°C til +60°C
Degree of protection	IP 65

Example

	S11	T	- Z	- E...	- X
Basic unit					
S11 1-axis					
Grip / palm grip					
Knob (standard)					
M Mechanical zero interlock					
T Dead man					
D Push button					
GS8 Knob GS8					
Z Spring return (<i>included in basic unit!</i>)					
R Friction brake					
Interface (<i>description on the following page</i>)					
E0xx Digital output					
E1xx Voltage output					
E2xx Current output					
Special model					
X Special / customer-specific					

Identification of the installation variants with switching directions:



Single-axis controller S11

Digital Output

Supply voltage	9-32VDC	
Current carrying capacity	Direction signal 150 mA Zero position signal 500 mA	
Wiring	Cable 500 mm long with plug (male) Mini-Mate-N-Lok 10-pole	
Cable 500 mm long with plug (male)		
	1 axis	E001 1

Voltage output (not stabilized)

Supply voltage	4,75-5,25VDC	
Current carrying capacity	Direction signal 8 mA	
Wiring	Cable 500 mm long with plug (male) Mini-Mate-N-Lok 10-pole	
	Characteristic: <input type="checkbox"/> = contra rotating, <input checked="" type="checkbox"/> = concurrently rotating	
0,5...2,5...4,5V redundant + 2 direction signal per axis		
	1 axis	E104 1 <input type="checkbox"/>

Voltage output

Supply voltage	9-32VDC (*11,5-32V)	
Current carrying capacity	Direction signal 150 mA Zero position signal 500 mA	
Wiring	Cable 500 mm long with plug (male) Mini-Mate-N-Lok 10-pole	
	Characteristic: <input type="checkbox"/> = contra rotating, <input checked="" type="checkbox"/> = concurrently rotating	
0,5...2,5...4,5V redundant + 2 direction signal + 1 zero position signal (galvanically isolated) per axis		
	1 axis	E112 1 <input type="checkbox"/>
0...5...10V redundant + 2 direction signal + 1 zero position signal (galvanically isolated) per axis, supply voltage 11,5 - 32VDC		
	1 axis	E132 1 <input type="checkbox"/>
10...0...10V 2 direction signal + 1 zero position signal (galvanically isolated) per axis, supply voltage 11,5 - 32VDC, sensor redundant, 1 output with signal monitoring		
	1 axis	E136 1
Voltage output with other value on request!		

Single-axis controller S11






Current output

Supply voltage	9-32VDC		
Current carrying capacity	Direction signal 150 mA Zero position signal 500 mA 75 mm (from 3 axis)		
Wiring	Cable 500 mm long with plug (male) CPC 13 - 9-pole		
0...10...20mA 2 direction signal + 1 zero position signal (galvanically isolated) per axis, sensor redundant, 1 output with signal monitoring with signal monitoring			
		1 axis	E206 1
20...0...20mA 2 direction signal + 1 zero position signal (galvanically isolated) per axis, sensor redundant, 1 output with signal monitoring			
		1 axis	E208 1
4...12...20mA 2 direction signal + 1 zero position signal (galvanically isolated) per axis, sensor redundant, 1 output with signal monitoring			
		1 axis	E214 1
20...4...20mA 2 direction signal + 1 zero position signal (galvanically isolated) per axis, sensor redundant, 1 output with signal monitoring			
		1 axis	E216 1
Voltage output with other value on request!			

Attachment

Mating connector AMP Mini-Mate-N-LoK 10-pole (female contact)	5300000963	
Mating connector AMP Mini-Mate-N-LoK 10-pole (female contact) with 2 m cable	5300000964	

T = Dead man's button

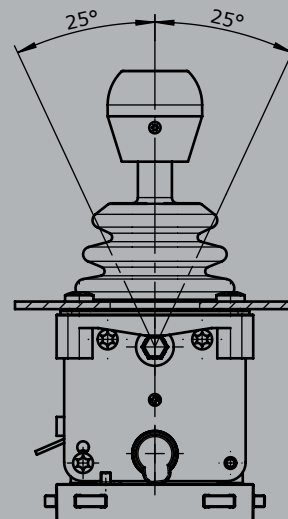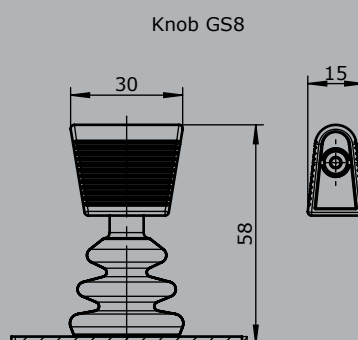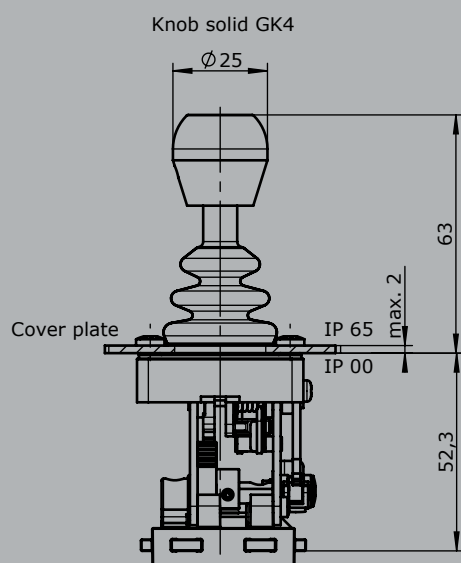

Single-axis controller S14



The single-axis controller S14 is a designed hall sensor switching device for electro-hydraulic and remote controlled hydraulic.
The modular design of the switching device is universally applicable.
The single-axis controller is resistant to oil, maritime conditions e.g. offshore /vessels, UV radiation typically from the sun.



1


Technical data

Mechanical life S14	6 million operating cycles
Operating temperature	-40°C til +60°C
Degree of protection	IP 65

	S14L	S8	Example T	- 012C	+ A05 C61	- X
Basic unit						
S14L						
Control-handle extended						
S8 +20 mm						
Grip / palm grip						
T Dead man						
Axis 1 (direction 1-2)						
01 2 contacts (2A 250V AC15)						
Z Spring return						
C Mechanical encoder						
Description axis 1 (direction 1-2)						
A05 Arrangement MSP 21						
C61 Mechanical encoder MEC 1-2						
Special model						
X Special / customer-specific						

	S14L	S8	T
Basic unit			
S14L 1-axis left			
S14R 1-axis right			
Control-handle extended			
Standard			
S8 +20 mm			
Grip / palm grip			
Knob (standard)			
M Mechanical zero interlock			
MH Mechanical zero interlock + signal contact			
T Dead man			
H Signal button			
GK1 Knob 42 mm			
GK1M Mechanical zero interlock			
GK1MN Mechanical zero interlock (push down)			
GK1T Dead man			
GK1H Signal button			
GK1MH Mechanical zero interlock + signal contact			

Identification of the installation
variants with switching directions:



Technical details may vary based on configuration or application! Technical data subject to change without notice!

Single-axis controller S14

		S14L	S8	T	- 01ZC	+ A05	C61	- X
GK1D	Push button							
GK1DV	Flush push button							
GSP	Twist Handle 2x5 kOhm + direction track I _{max} = 1 mA							
B ...	Palm grip B... (see page palm grip 128)							

Attention! The single-axis controller S14 is not suited for big palm grip (B3, B7/B8, B9...)!


		S14L	S8	T	- 01ZC	+ A05	C61	- X
Axis 1: direction 1-2 left / direction 5-6 right								
	(Standard contacts gold-plated 2A 250V AC15)							
01	2 contacts							
02	4 contacts							
03	6 contacts							
Z	Spring return (included in basic unit!)							
R	Friction brake							
C	Mechanical encoder							
		C61						
			MEC 1-2					
			EA/02-10			I max. 1 mA		
			Potentiometer track			2x10 kOhm		
			Direction track			Arrangement MS 26-0		
		C62	MEC 1-7					
			EA/10-10			I max. 1 mA		
			Potentiometer track			2x5 kOhm		
			Direction track			Arrangement MS 26-0-1		
		C66	MEC 1-10					
			EA/17-10			I max. 1 mA		
			Potentiometer track			2x1,5 kOhm		
			Direction track			Arrangement MS 21-0+MS 21		
		C63	MEC 1-6					
			EA/09-10					
			6 Bit Gray Code					
		C64	MEC 1-6-5					
			ER/36-10			Us= 18-30V		
			Current output 20...4...20mA					
		C65	MEC 1-6-8					
			ER/ 36-10			Us= 18-30V		
			Current output 20...0...20mA					
		C67	MEC 1-6-9					
			ER/36-11			Us= 18-30V		
			Voltage output 10...0...10V					
			More potentiometer on request!					

		S14L	S8	T	- 01ZC	+ A05	C61	- X
Special model								
X	Special / customer-specific							

Single-axis controller


S14

T = Dead man's button
H = Signal button
M = Latch for mechanical
zero interlock



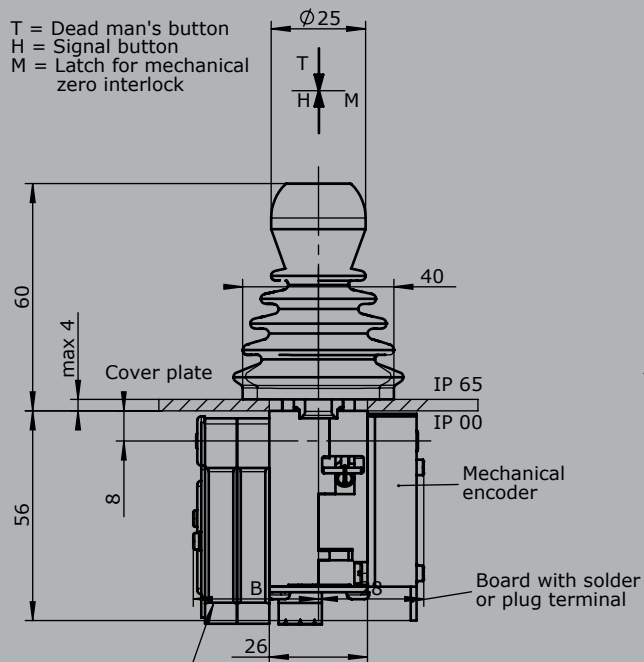


CAGE CLAMP® connection
max. 1,5mm²


Knob solid GK
for MN, MP



Knob solid GSP
for 3.direction 11-12

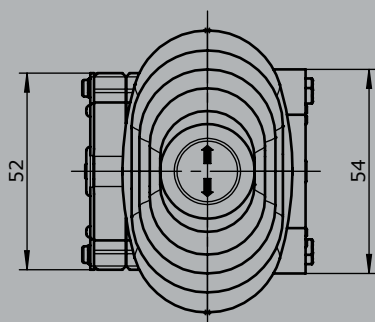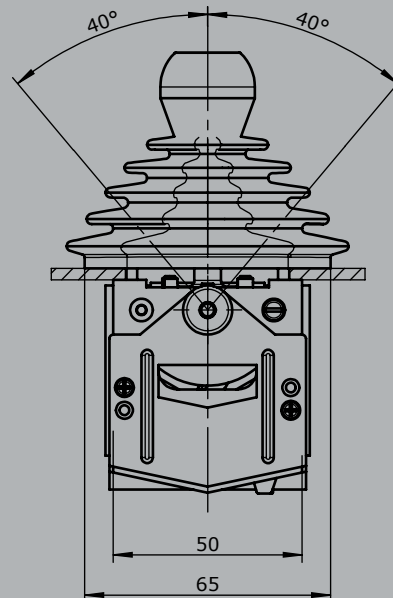

Hole pattern



Type	No. of contacts	Dim. B
01	2	24
02	4	33
03	6	42

Single-axis controller S2 / SS2 / S21



The single-axis controller S2/SS2 is a robust switching device for remote controlled and electrohydraulic applications.
The modular design of the switching device is universally applicable.
The single-axis controller is resistant to oil, maritime conditions e.g. offshore /vessels, UV radiation typically from the sun.

Technical data

Mechanical life S2 / S21	6 million operating cycles
Mechanical life SS2	10 million operating cycles
Operating temperature	-40°C til +60°C
Degree of protection	IP 54




1

	S2L	S5	T	- 02 Z P	- A050 P134	- X
Basic unit						
S2L left						
Control-handle extended						
S5 -20 mm						
<i>*Only possible in combination with handle!</i>						
Grip / palm grip						
T Dead man						
Axis 1 (direction 1-2)						
02 3 contacts (2A 250V AC15)						
Z Spring return						
P Potentiometer						
Description axis 1 (direction 1-2)						
A050 Arrangement MSP 21						
P134 Potentiometer T396 2x5 kOhm						
Special model						
X Special / customer-specific						

	S2L	S5	T	- 02 Z P	- A050 P134	- X
Basic unit						
S2L Single-axis controller left						
S2R Single-axis controller right						
S21L Single-axis controller left with flange 96x96 mm						
S21R Single-axis controller right with flange 96x96 mm						
reinforced version						
SS2L Single-axis controller left						
SS2R Single-axis controller right						
SS21L Single-axis controller left with flange 96x96 mm						
SS21R Single-axis controller right with flange 96x96 mm						

Identification of the installation variants with switching directions:

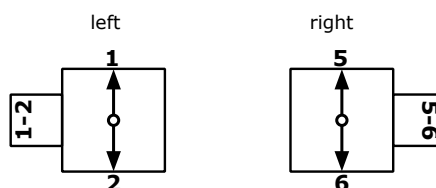

Single-axis controller

S2 / SS2 / S21

Combination possibilities with our ball handles



	S2L	S5	T	- 02 Z P	- A050 P134	- X
Control-handle extended						
Standard						
S5 -20 mm						
S8 +20 mm						
Grip / palm grip						
Knob (standard)						
M Mechanical zero interlock						
MN Mechanical zero interlock (push down)						
T Dead man						
MT Mechanical zero interlock + dead man						
H Signal button						
MH Mechanical zero interlock + signal button						
D Push button						
MD Mechanical zero interlock + push button						
DV Flush push button						
MDV Mechanical zero interlock + flush push button						
B... Palm grip B... (see page palm grip 128)						

	S2L	S5	T	- 02 Z P	- A050 P134	- X
Axis 1: direction 1-2 left / direction 5-6 right						
02 3 contacts	Standard contact - arrangement see page 106					
03 5 contacts	z.B.					
04 7 contacts	A98 MS 0					
05 9 contacts	A05 MS 21					
	A0500 MS 21-00					
	A110 MS 24-0					
	A99 contact - arrangement according customer request					
Z Spring return						
R Friction brake						
(P) Possibility of mounting potentiometer and encoder (Gessmann-types)						
P Potentiometer	P131	T396 2x0,5 kOhm	I max. 1 mA			
	P132	T396 2x1 kOhm	I max. 1 mA			
	P133	T396 2x2 kOhm	I max. 1 mA			
	P134	T396 2x5 kOhm	I max. 1 mA			
	P135	T396 2x10 kOhm	I max. 1 mA			
	More potentiometer on request!					
C Encoder	C... Encoder see page 118					

Technical details may vary based on configuration or application! Technical data subject to change without notice!

Single-axis controller
S2 / SS2 / S21








	S2L	S5	T	- 02 Z P	- A050 P134	- X
Special model						
X	Special / customer-specific					
X1	Microswitch (MZT 1) positively driven NC contact					
Attachment						
Indicating labels						
Indicating labels with engraving						

Single-axis controller


S2 / SS2 / S21

T = Dead man's button
H = Signal button
M = Latch for mechanical
zero interlock

Knob solid
D= Push button

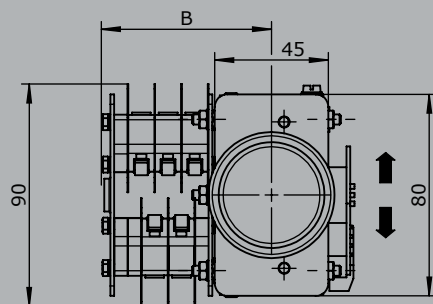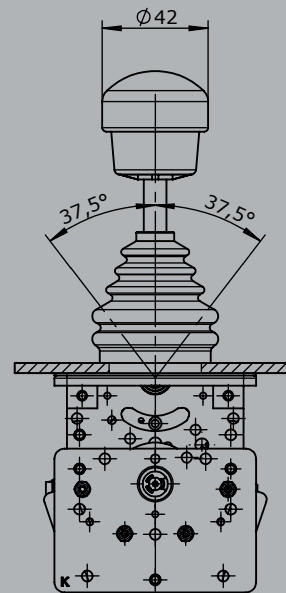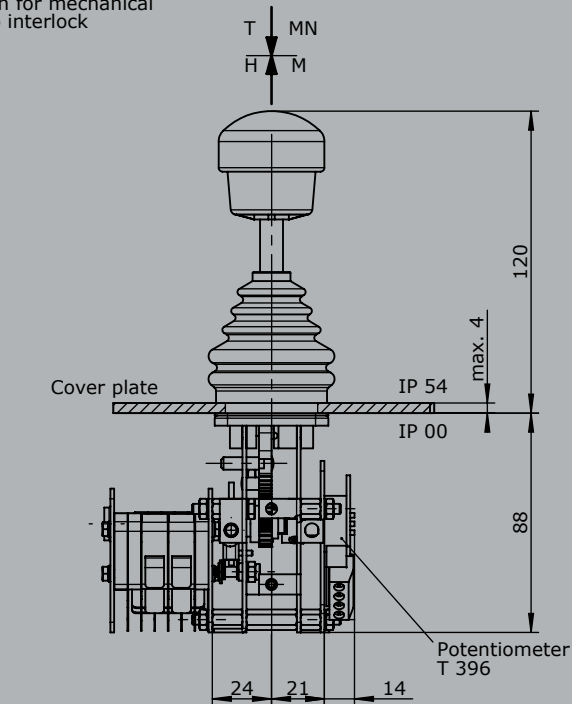

Palm grip B5
B5 T = Dead man's button

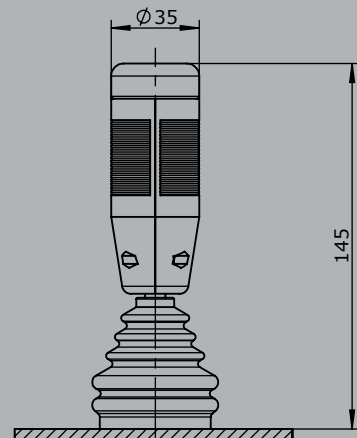





Type	No. of contacts	Maß B
02	3	62
03	5	72
04	7	83
05	9	93

Single-axis controller


S2 / SS2 / S21

T = Dead man's button
H = Signal button
M = Latch for mechanical
zero interlock

Knob solid
D= Push button

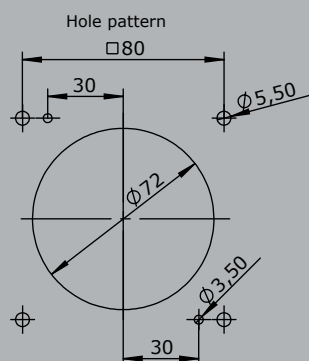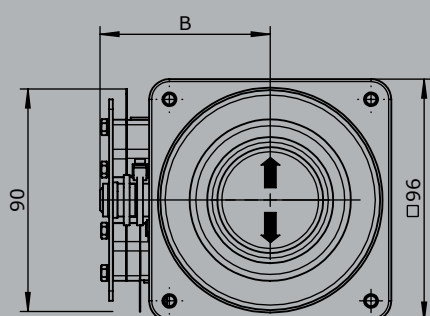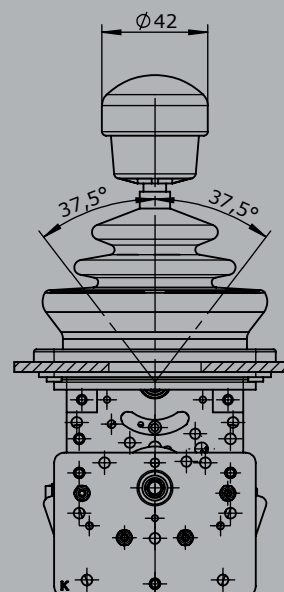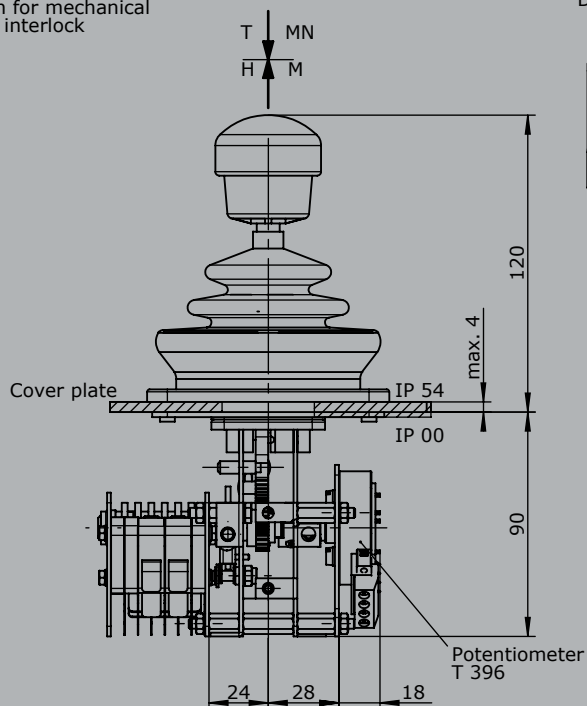

Palm grip B5
B5 T = Dead man's button

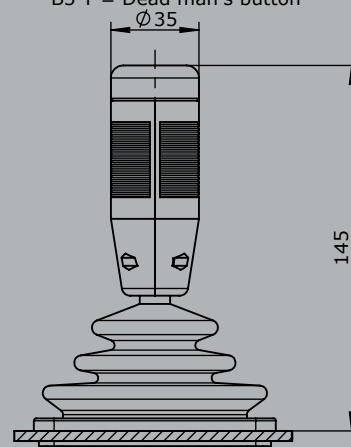

Type	No. of contacts	Maß B
02	3	62
03	5	72
04	7	83
05	9	93

Single-axis controller S22 / SS22



The single-axis controller S2/SS2 is a robust switching device for remote controlled and electrohydraulic applications.
The modular design of the switching device is universally applicable.
The single-axis controller is resistant to oil, maritime conditions e.g. offshore /vessels, UV radiation typically from the sun.



Technical data


Mechanical life S22	6 million operating cycles
Mechanical life SS22	10 million operating cycles
Operating temperature	-40°C til +60°C
Degree of protection	IP 54

	S22L	S5	T	- 3 Z P	- A050 P134	- X
Basic unit						
S22L left						
Control-handle extended						
S5 -20 mm						
Grip / palm grip						
T Dead man						
Axis 1 (direction 1-2)						
3 3 contacts (2A 250V AC15)						
Z Spring return						
P Potentiometer						
Description axis 1 (direction 1-2)						
A050 Arrangement MSP 21						
P134 Potentiometer T396 2x5 kOhm						
Special model						
X Special / customer-specific						

	S22L	S5
Basic unit		
S22L Single-axis controller left		
S22R Single-axis controller right		
reinforced version		
SS22L Single-axis controller left		
SS22R Single-axis controller right		
Control-handle extended		
Standard		
S5 -20 mm		
S8 +20 mm		

T - 3 Z P - A050 P134 - X

Identification of the installation variants with switching directions:

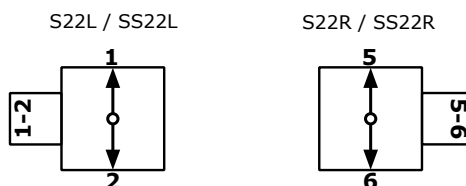

Single-axis controller S22 / SS22

Combination possibilities with our ball handles



S22L S5 T - 3 Z P - A050 P134 - X

Grip / palm grip

	Knob (standard)
M	Mechanical zero interlock
MN	Mechanical zero interlock (push down)
T	Dead man
MT	Mechanical zero interlock + dead man
H	Signal button
MH	Mechanical zero interlock + signal button
D	Push button
MD	Mechanical zero interlock + push button
DV	Flush push button
MDV	Mechanical zero interlock + flush push button
B...	Palm grip B... (see page palm grip 128)

S22L S5 T - 3 Z P - A050 P134 - X

Axis 1: direction 1-2 left / direction 5-6 right

1	1 contact	Standard contact - arrangement see page 106		
2	2 contacts	z.B.		
3	3 contacts	A98	MS 0	
4	4 contacts	A05	MS 21	
		A0500	MS 21-00	
		A99 contact - arrangement according customer request		
Z	Spring return			
R	Friction brake			
(P)	Possibility of mounting potentiometer and encoder (Gessmann-types)			
P	Potentiometer	P131	T396 2x0,5 kOhm	I max. 1 mA
		P132	T396 2x1 kOhm	I max. 1 mA
		P133	T396 2x2 kOhm	I max. 1 mA
		P134	T396 2x5 kOhm	I max. 1 mA
		P135	T396 2x10 kOhm	I max. 1 mA
		More potentiometer on request!		
C	Codierer	C...Encoder see page 118		

Single-axis controller
S22 / SS22



S22L S5 T - 3 Z P - A050 P134 - X


Special model	
X	Special / customer-specific
X1	Switching run 2-0-2

Attachment	
Indicating labels	
Indicating labels with engraving	





Single-axis controller

S22 / SS22


T = Dead man's button
 H = Signal button
 M = Latch for mechanical zero interlock

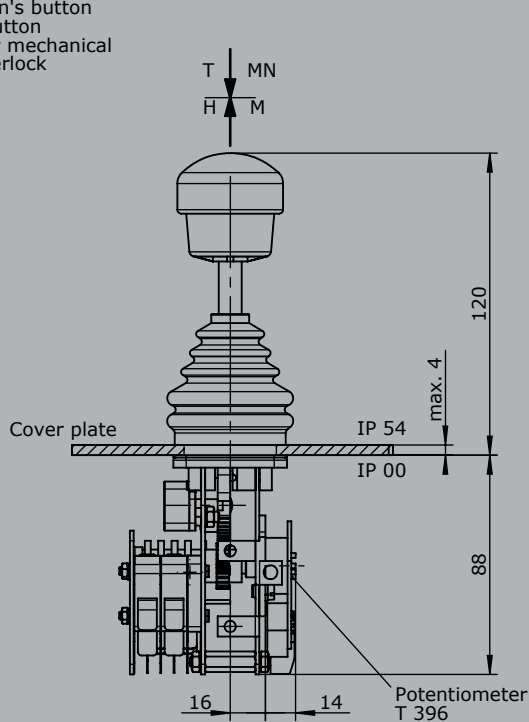

Knob solid
 D= Push button

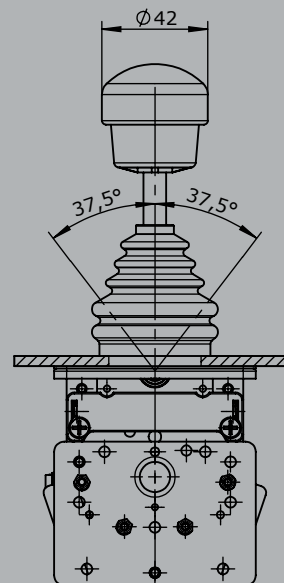

Palm grip B5
 B5 T = Dead man's button

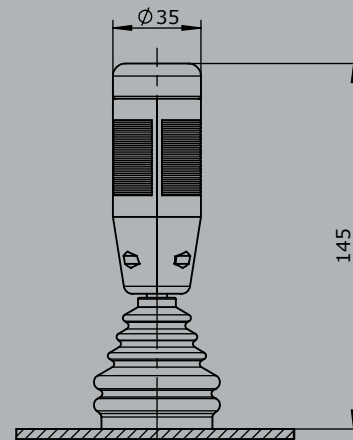

Type	No. of contacts	Dim. B
1	1	25
2	2	31
3	3	36
4	4	42

Single-axis controller S23



The single-axis controller S23 is a robust switching device for shipbuilding and electro-hydraulic applications. The modular design of the switching device is universally applicable. The single-axis controller is resistant to oil, maritime conditions e.g. offshore / vessels, UV radiation typically from the sun.

Technical data

Mechanical life S23	6 million operating cycles
Operating temperature	-40°C til +60°C
Degree of protection	IP 65




Example

	S23L	S5	M	- 3 Z P	- A050 P134	- X
Basic unit						
S23L left						
Control-handle extended						
S5 -20 mm						
Grip / palm grip						
M Mechanical zero interlock						
Axis 1 (direction 1-2)						
3 3 contacts (2A 250V AC15)						
Z Spring return						
P Potentiometer						
Description axis 1 (direction 1-2)						
A050 Arrangement MSP 21-0						
P134 Potentiometer T396 2x5 kOhm						
Special model						
X Special / customer-specific						

	S23L	S5	M	- 3 Z P	- A050 P134	- X
Basic unit						
S23L left						
S23R right						
Control-handle extended						
Standard 140 mm						
S5 -20 mm						
S8 +20 mm						

Identification of the installation variants with switching directions:

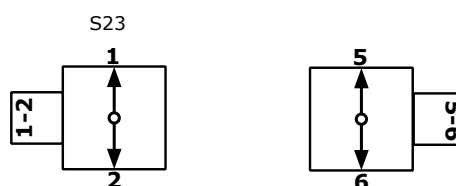

Single-axis controller S23

S23L S5 M - 3 Z P - A050 P134 - X

Grip / palm grip

- Knob (standard)
- M Mechanical zero interlock
- Q T-grip
- QM T-grip with mechanical zero interlock

S23L S5 M - 3 Z P - A050 P134 - X

Axis 1: direction 1-2 left / direction 5-6 right

1	1 contact	Standard contact - arrangement see page 106		
2	2 contacts	z.B.		
3	3 contacts	A98	MS 0	
4	4 contacts	A05	MS 21	
		A0500	MS 21-00	
		A99 contact - arrangement according customer request		
Z	Spring return			
R	Friction brake			
(P)	Possibility of mounting potentiometer and encoder (Gessmann-types)			
P	Potentiometer	P131	T396 2x0,5 kOhm	I max. 1 mA
		P132	T396 2x1 kOhm	I max. 1 mA
		P133	T396 2x2 kOhm	I max. 1 mA
		P134	T396 2x5 kOhm	I max. 1 mA
		P135	T396 2x10 kOhm	I max. 1 mA
		More potentiometer on request!		
C	Encoder	C... Encoder see page 118		


S23L S5 M - 3 Z P - A050 P134 - X

Special model

- X Special / customer-specific

Single-axis controller S23

M = Latch for mechanical zero interlock

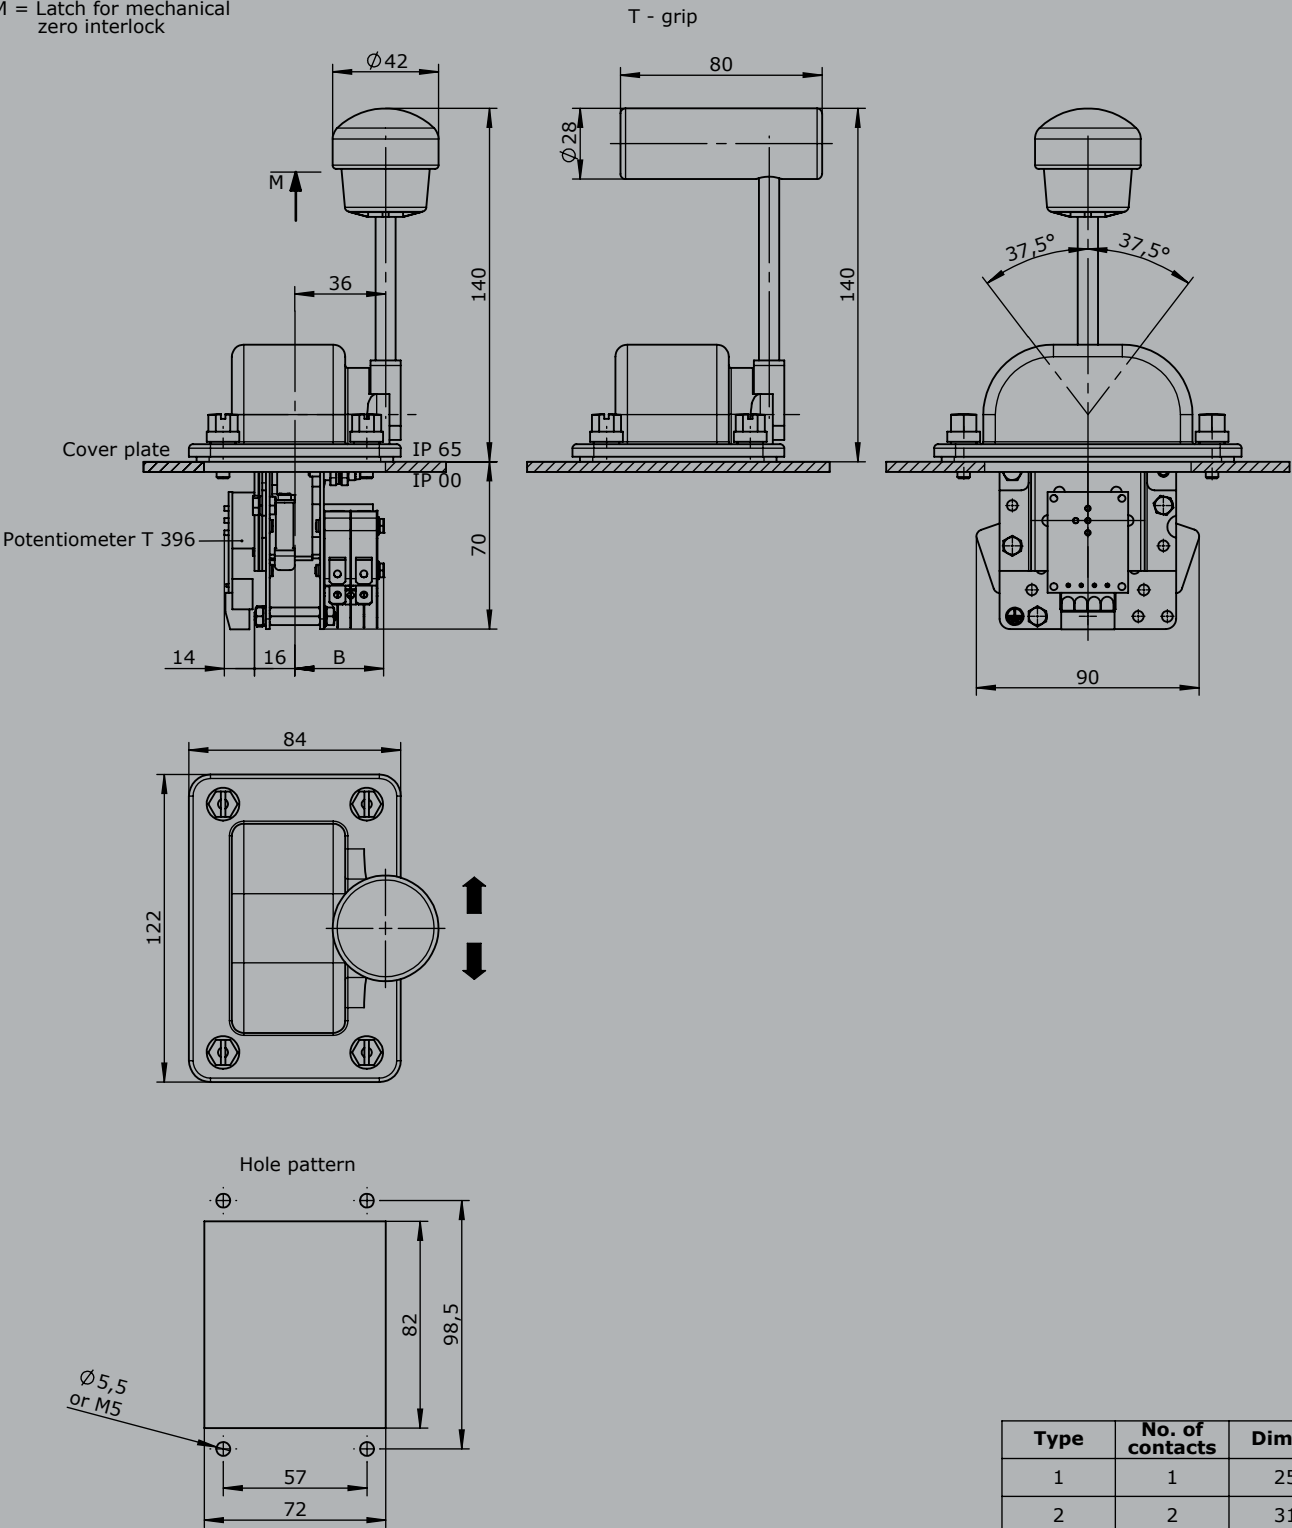

Type	No. of contacts	Dim. B
1	1	25
2	2	31
3	3	36
4	4	42

Single-axis controller S26



The single-axis controller S26 is a hall sensor switching device designed for electro-hydraulic and remote controlled hydraulic. The modular design of the switching device is universally applicable. The single-axis controller is resistant to oil, maritime conditions e.g. offshore /vessels, UV radiation typically from the sun.

Technical data


Mechanical life S26	6 million operating cycles
Operating temperature	-40°C til +60°C
Degree of protection	IP 54



1

		Example				
		S26	T	- Z	- E...	- X
Basic unit						
S26	1-axis					
Grip / palm grip						
	Knob					
M	Mechanical zero interlock					
T	Dead man					
H	Signal button					
D	Push button					
B...	Palm grip B... (see page palm grip 128)					
Z	Spring return					
R	Friction brake					
Interface (description on the following pages)						
E0xx	Digital output					
E1xx	Voltage output					
E2xx	Current output					
Special model						
X	Special / customer-specific					

Identification of the installation variants with switching directions:



Single-axis controller

S26

Combination possibilities with our ball handles



Digitale output

Supply voltage	9-32VDC	
Current carrying capacity	Direction signal 150 mA	
	Zero position signal 500 mA	
Wiring	Cable 500 mm long with plug (male) CPC 13 - 9-pole	
2 direction signals + 1 zero position signal (galvanically isolated) per axis		
	1 axis	E001 1

Voltage output (not stabilized)

Supply voltage	4,75-5,25VDC	
Current carrying capacity	Direction signal 8 mA	
Wiring	Cable 500 mm long with plug (male) CPC 13 - 9-pole	
	Characteristic: <input type="checkbox"/> = contra rotating, <input checked="" type="checkbox"/> = concurrently rotating	
0,5...2,5...4,5V redundant + 2 direction signal per axis		
	1 axis	E104 1 <input type="checkbox"/>

Voltage output

Supply voltage	9-32VDC (*11,5-32V)	
Current carrying capacity	Direction signal 150 mA	
	Zero position signal 500 mA	
Wiring	Cable 500 mm long with plug (male) CPC 13 - 9-pole	
	Characteristic: <input type="checkbox"/> = contra rotating, <input checked="" type="checkbox"/> = concurrently rotating	
0,5...2,5...4,5V redundant + 2 direction signal + 1 zero position signal (galvanically isolated) per axis		
	1 axis	E112 1 <input type="checkbox"/>
0...5...10V redundant + 2 direction signal + 1 zero position signal (galvanically isolated) per axis, supply voltage 11,5 - 32VDC		
	1 axis	E132 1 <input type="checkbox"/>
10...0...10V 2 direction signal + 1 zero position signal (galvanically isolated) per axis, supply voltage 11,5 - 32VDC, sensor redundant, 1 output with signal monitoring		
	1 axis	E136 1

Voltage output with other value on request!

Single-axis controller S26

Current output

Supply voltage	9-32VDC		
Current carrying capacity	Direction signal 150 mA Zero position signal 500 mA		
Wiring	Cable 500 mm long with plug (male) CPC 13 - 9-pole		
0...10...20mA 2 direction signal + 1 zero position signal (galvanically isolated) per axis, sensor redundant, 1 output with signal monitoring			
	1 axis		E206 1
20...0...20mA 2 direction signal + 1 zero position signal (galvanically isolated) per axis, sensor redundant, 1 output with signal monitoring			
	1 axis		E208 1
4...12...20mA 2 direction signal + 1 zero position signal (galvanically isolated) per axis, sensor redundant, 1 output with signal monitoring			
	1 axis		E214 1
20...4...20mA 2 direction signal + 1 zero position signal (galvanically isolated), per axis, sensor redundant, 1 output with signal monitoring			
	1 axis		E216 1
<i>Current output with other value on request!</i>			

Attachment





Mating connector AMP CPC 13 9-pole (male-contact)	5300000479	
Mating connector AMP CPC 13 9-pole (male-contact) with 2 m cable	5300000480	

Single-axis controller S26



T = Dead man's button
H = Signal button
M = Latch for mechanical
zero interlock



Knob solid
D= Push button

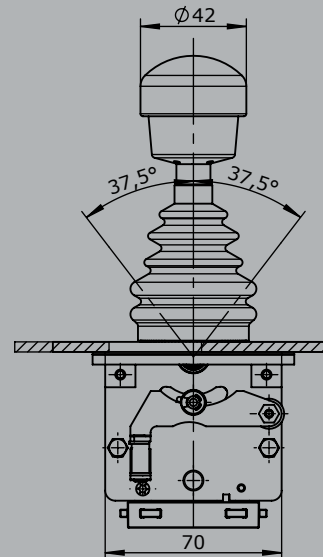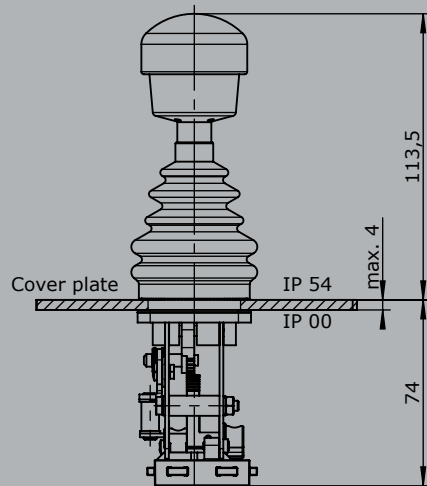

Palm grip B5
B5 T = Dead man's button

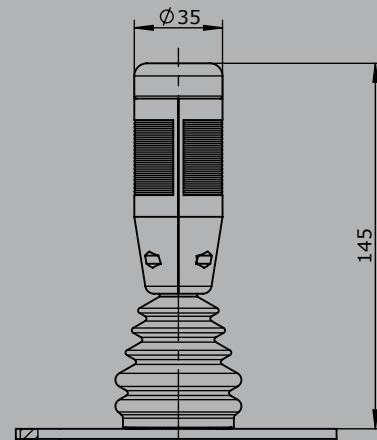

Single-axis controller S27



The single-axis controller S27 is a hall sensor switching device designed for electro-hydraulic and remote controlled hydraulic. The modular design of the switching device is universally applicable. The single-axis controller is resistant to oil, maritime conditions e.g. offshore /vessels, UV radiation typically from the sun.

Technical data

Mechanical life S27	6 million operating cycles
Operating temperature	-40°C til +60°C
Degree of protection	IP 65




1


	S27L	T	- Z	- E...	- X
Basic unit					
S27L left					
S27R right					
Grip / palm grip					
Knob (standard)					
M Mechanical zero interlock					
Q T-grip					
Z Spring return					
R Friction brake					
Interface (description on the following pages)					
E0xx Digital output					
E1xx Voltage output					
E2xx Current output					
Special model					
X Special / customer specific					

Identification of the installation variants with switching directions:

S27 left



S27 right



Single-axis controller S27

Digital output

Supply voltage	9-32VDC
Current carrying capacity	Direction signal 150 mA Zero position signal 500 mA
Wiring	Cable 500 mm long with plug (male) CPC 13 - 9-pole

2 direction signals + 1 zero position signal (galvanically isolated) per axis

1 axis

E001 1

Voltage output (not stabilized)

Supply voltage	4,75-5,25VDC
Current carrying capacity	Direction signal 8 mA
Einbautiefe A	60 mm
Wiring	Cable 500 mm long with plug (male) CPC 13 - 9-pole

Characteristic: ☐ = contra rotating, ☒ = concurrently rotating

0,5...2,5...4,5V redundant + 2 direction signal per axis

1 axis

E104 1 ☐

Voltage output

Supply voltage	9-32VDC (*11,5-32V)
Current carrying capacity	Direction signal 150 mA Zero position signal 500 mA
Wiring	Cable 500 mm long with plug (male) CPC 13 - 9-pole

Characteristic: ☐ = contra rotating, ☒ = concurrently rotating

0,5...2,5...4,5V redundant + 2 direction signal + 1 zero position signal (galvanically isolated) per axis

1 axis

E112 1 ☐

00...5...10V redundant + 2 direction signal + 1 zero position signal (galvanically isolated) per axis, supply voltage 11,5 - 32VDC

1 axis

E132 1 ☐

10...0...10V 2 direction signal + 1 zero position signal (galvanically isolated) per axis, supply voltage 11,5 - 32VDC, sensor redundant, 1 output with signal monitoring

1 axis

E136 1

Voltage output with other value on request!

Single-axis controller S27

Current output

Supply voltage	9-32VDC	
Current carrying capacity	Direction signal 150 mA Zero position signal 500 mA	
Wiring	Cable 500 mm long with plug (male) CPC 13 - 9-pole	
0...10...20mA redundant + 2 direction signal + 1 zero position signal (galvanically isolated) per axis, sensor redundant, 1 output with signal monitoring		
	1 axis	E206 1
20...0...20mA redundant + 2 direction signal + 1 zero position signal (galvanically isolated) per axis, sensor redundant, 1 output with signal monitoring		
	1 axis	E208 1
4...12...20mA redundant + 2 direction signal + 1 zero position signal (galvanically isolated) per axis, sensor redundant, 1 output with signal monitoring		
	1 axis	E214 1
20...4...20mA redundant + 2 direction signal + 1 zero position signal (galvanically isolated) per axis, sensor redundant, 1 output with signal monitoring		
	1 axis	E216 1


Voltage output with other value on request!

Attachment

Mating connector AMP CPC 13 9-pole (male-contact)	5300000479
Mating connector AMP CPC 13 9-pole (male-contact) with 2 m cable	5300000480

Single-axis controller S27

M = Latch for mechanical zero interlock

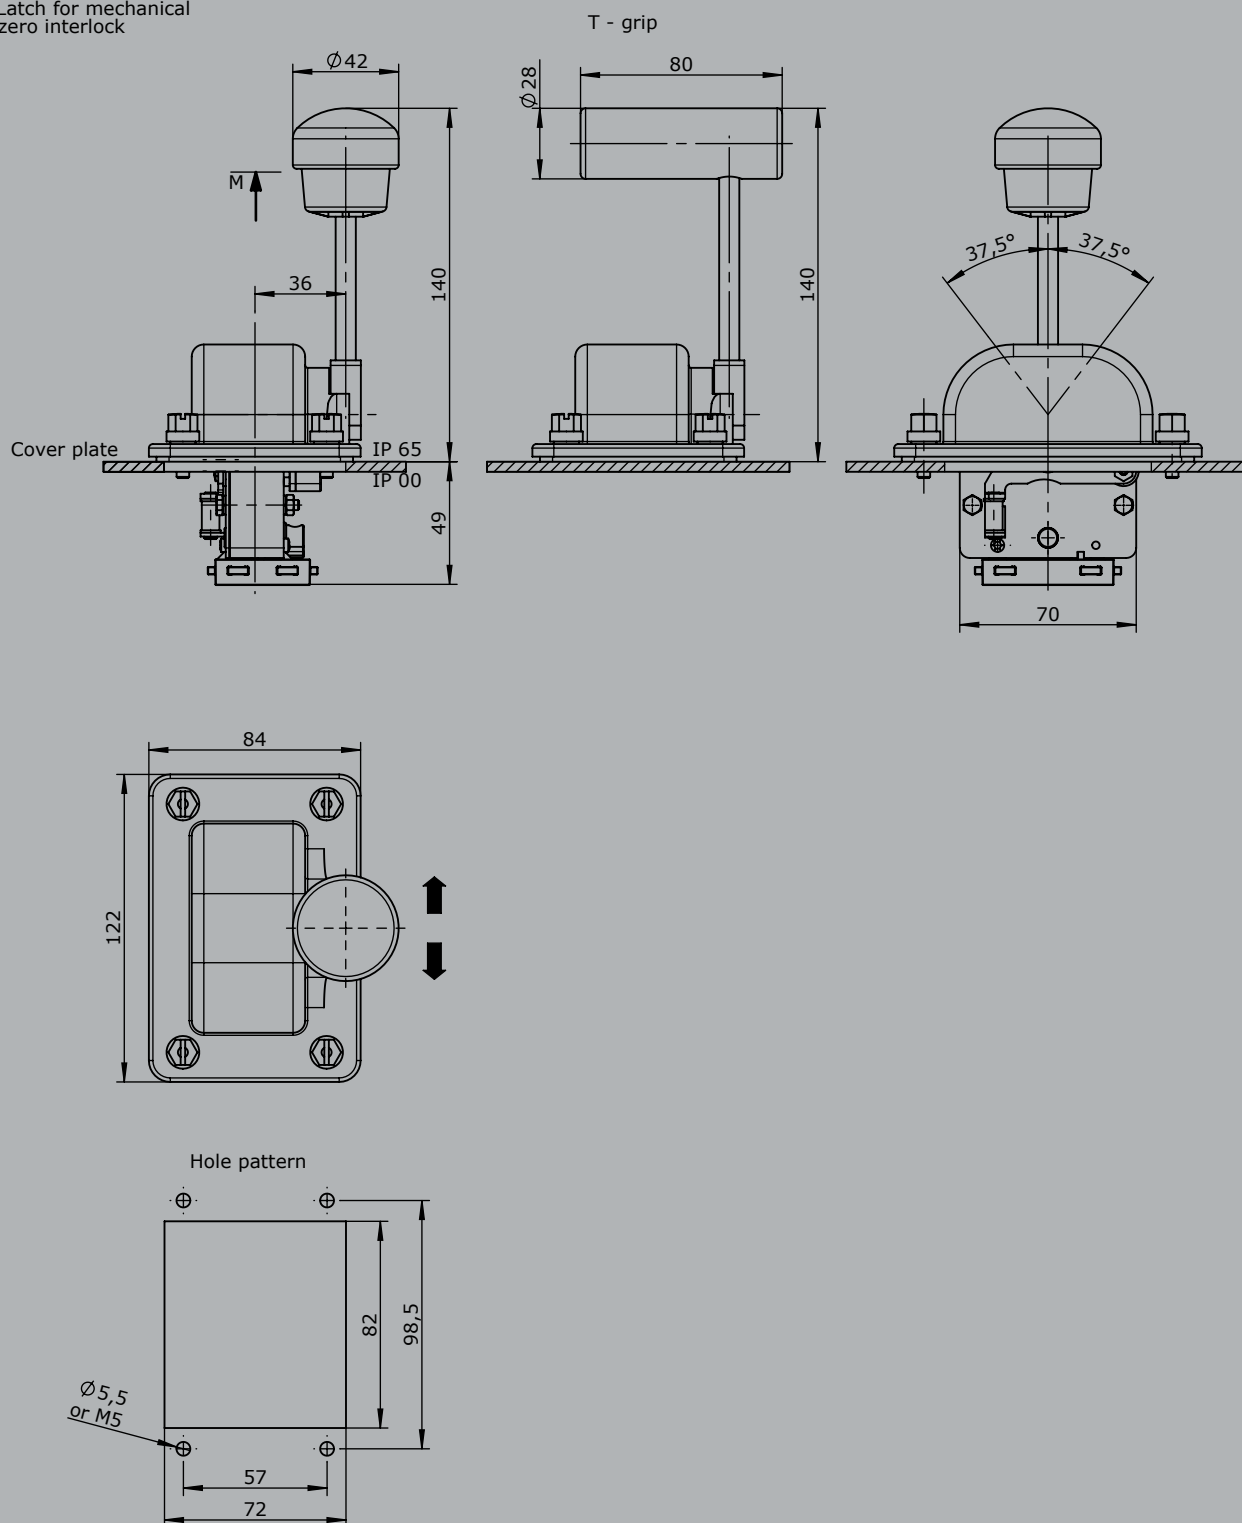

Single-axis control S3



The single-axis control S3 is a rugged switching device for hoisting applications. The modular design enables the switching device to be used universally. The single-axis controller is resistant to oil, maritime conditions e.g. offshore /vessels, UV radiation typically from the sun.

Technical data

Mechanical life S3	12 million operating cycles
Operating temperature	-40°C til +60°C
Degree of protection	IP 66 front



1

	S3L	S5	Q	<i>Example</i>			- A05 P214	- E1291	- X
Basic unit									
S3L Single-axis controller left									
Control-handle extended									
S5 -20 mm									
Grip- control-handle left									
Q T-grip									
Axis 1									
2 2 contacts (1,5A 24VDC13)									
R Friction brake									
P Potentiometer									
Cover housing									
B Cover housing									
Description axis 1 (direction 1-2)									
A05 Arrangement MSP 21									
P214 Potentiometer T246 2x5 kOhm									
Interface									
E1291 Voltage output 0...5...10V									
Special model									
X Special / customer-specific									

Single-axis controller


S3

1


	S3L	S5	Q	- 2 R P	- B	- A05	P214	- E1291	- X
Basic unit									
S3L	Single-axis controller, control-handle left								
S3R	Single-axis controller, control-handle right								
Control-handle extended*									
	Standard 148 mm								
S5	-20 mm								
S8	+20 mm								
<i>*Only possible in combination with handle!</i>									
Grip									
	Knob								
D	Push button								
Q	T-grip								
QD	T-grip with push button side								

**Identification of the installation variants
with switching directions:**


S3L



S3R



Identification of the installation variants with switching directions:

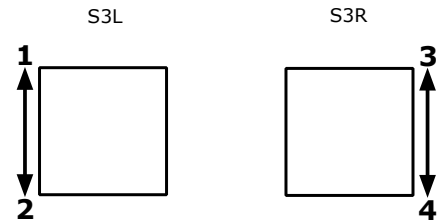

		S3L	S5	Q	- 2 R P	- B	- A05	P214	- E1291	- X		
Axis 1: direction 1-2 left												
1	1 contact	Standard contact - arrangement see page 106 z.B. A98 A05 A050 <i>A99 contact - arrangement according customer request</i>										
2	2 contacts											
3	3 contacts											
R	Friction brake											
(P)	Possibility of mounting potentiometer and encoder (Gessmann-types)											
P	Potentiometer			P211	T246 2x0,5 kOhm			I max. 1 mA				
				P212	T246 2x1 kOhm			I max. 1 mA				
				P214	T246 2x5 kOhm			I max. 1 mA				
				P215	T246 2x10 kOhm			I max. 1 mA				
				<i>More potentiometer on request!</i>								
	Hall-Potentiometer			P42	T1003							

	S3L	S5	Q	- 2 R P	- B	- A05	P214	- E1291	-	X
Cover housing										
B	Cover housing									
Interface <i>(description on the following pages)</i>										
	Potentiometer output									
E1xx	Voltage output									
E2xx	Current output									
Special model										
X	Special / customer-specific									

Technical details may vary based on configuration or application! Technical data subject to change without notice!

Single-axis controller S3

Voltage output

Supply voltage	11,5-32VDC			
Wiring	Cable 500 mm long with plug (male) CPC 17 - 14-pole			
0...5...10V per axis		1 axis	E129 1	<input type="checkbox"/>
10...0...10V per axis		1 axis	E141 1	<input type="checkbox"/>
-10...0...+10V per axis		1 axis	E140 1	<input type="checkbox"/>
<i>Voltage output with other value on request!</i>				

Current output




Supply voltage	18-36VDC			
Wiring	Cable 500 mm long with plug (male) CPC 17 - 14-pole			
4...12...20 mA per axis		1 axis	E209 1	
20...4...20 mA per axis		1 axis	E217 1	

Attachment


Mating connector AMP CPC 13 9-pole (female-contact)	5300000209	
Mating connector AMP CPC 13 9-pole (female-contact) with 2 m cable	5300000210	

Single-axis controller S3

T - grip
D= Push button

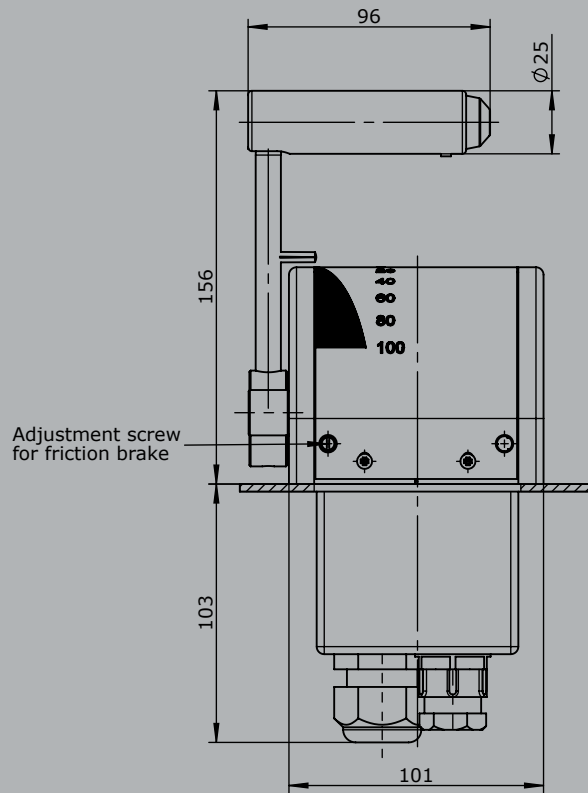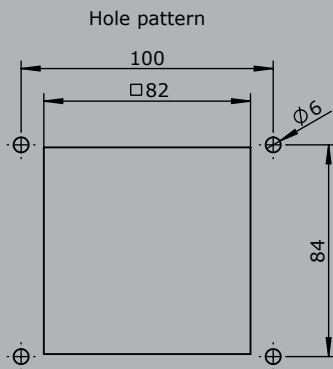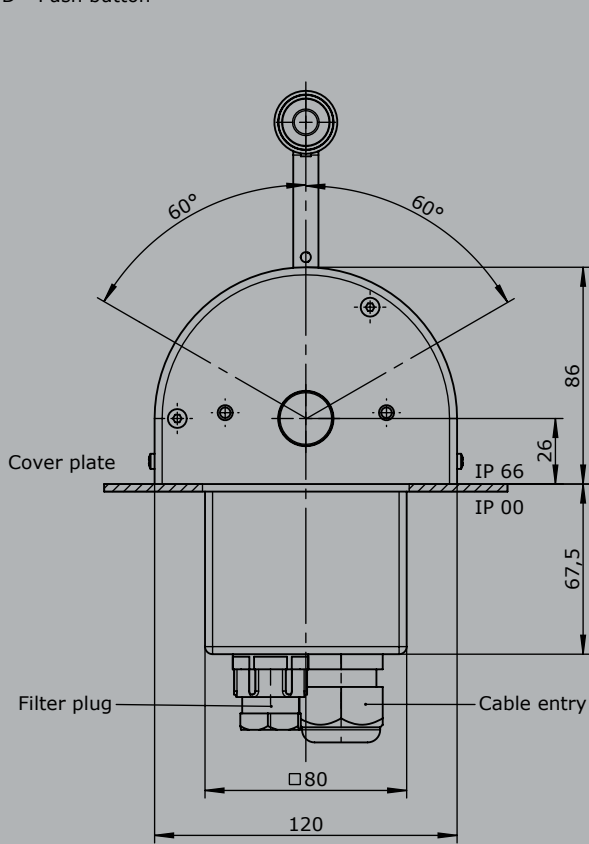

Knob solid
D= Push button

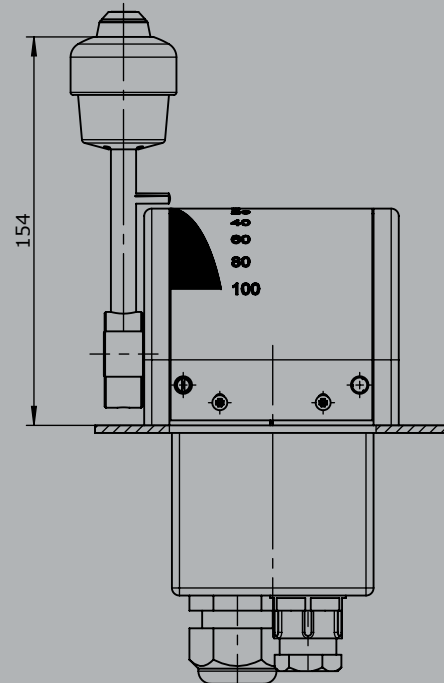

Single-axis controller S9



The single-axis controller S9 is a hallsensor switching device designed for electro-hydraulic applications. Due to its small size, the S9 is particularly suitable for installation in our ball handles. The single-axis controller is resistant to oil, maritime conditions e.g. offshore /vessels, UV radiation typically from the sun.

Technical data



Mechanical life S9	5 million operating cycles
Operating force	1,6 til 3,5N
Supply voltage	5VDC stabilized
Operating temperature	-40°C til +60°C
Degree of protection	IP 67





1

		Example	
		S9	- E10311
			- X
Basic unit			
S9			
Interface			
Voltage output			
E	1031 <input type="checkbox"/>	0,5...2,5...4,5V redundant at Ub=5V	1 axis
		characteristic: <input type="checkbox"/> = contra rotating, <input type="checkbox"/> = concurrently rotating	
Special model			
X Special / customer-specific			



Installed from the top

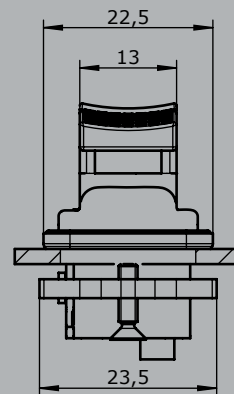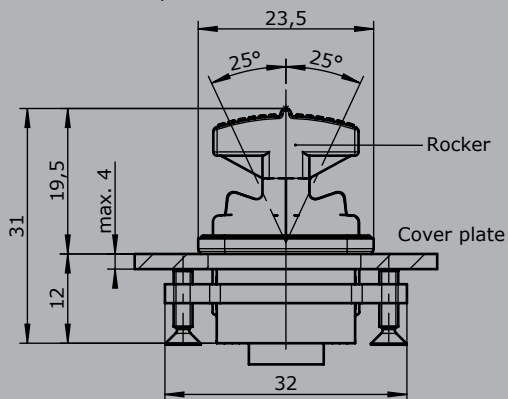



Hole pattern
(installed from the top)



Installed from below

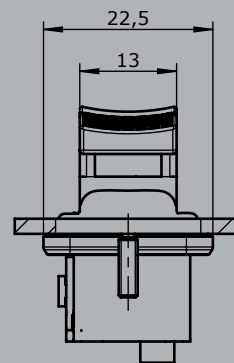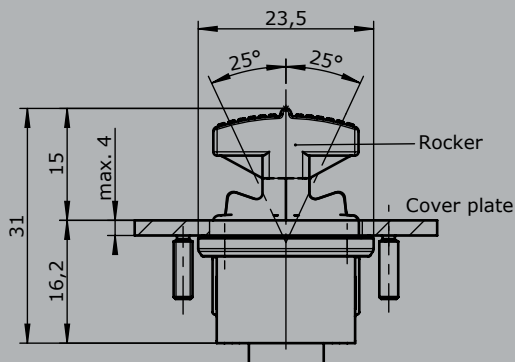

Hole pattern
(installed from below)

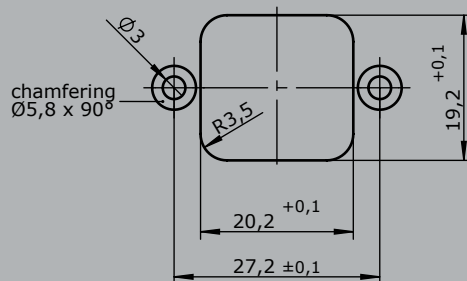

Control switch N6



The control-switch N6 is a rugged switching device for hoisting applications. The modular design enables the switching device to be used universally. The single-axis controller is resistant to oil, maritime conditions e.g. offshore /vessels, UV radiation typically from the sun.

Technical data

Mechanical life N6	10 million operating cycles
Operating temperature	-40°C til +60°C
Degree of protection	IP 54



	N6	- DG	Example - 01 Z P	- A05 P134	- X
Basic unit					
N6	incl. ISO-front plate 88x88 mm				
Grip					
DG	Twist grip				
Axis 1 (direction 2-4)					
01	2 contacts (2A 250V AC15)				
Z	Spring return				
P	Potentiometer				
Description axis 1 (direction 3-4)					
A05	Arrangement MSP 21				
P134	Potentiometer T396 2x5 kOhm				
Special model					
X	Special / customer-specific				

Control switch N6

N6 - DG - 01 Z P - A05 P134 - X

Basic unit

N6	incl. ISO-front plate 88x88 mm
N6A	incl. ISO-front plate 88x88 mm, IP65 (front)

Grip

KN	Knob
HG	Ball grip
DG	Twist grip

Axis 1: direction 3-4

(Standard contacts gold-plated 2A 250V AC15)

01	2 contacts	Standard contact - arrangement see page 106
02	4 contacts	z.B.
03	6 contacts	A980 MS 00
04	8 contacts	A05 MS 21
05	10 contacts	A0500 MS 21-00
06	12 contacts	A110 MS 24-0
A = silver contacts (4A 250V AC15)		A99 contacts - arrangement according customer request

Z	Spring return
R	Friction brake
(P)	Possibility of mounting potentiometer and encoder (Gessmann-types)

P	Potentiometer	P131	T396 2x0,5 kOhm	I max. 1 mA
		P132	T396 2x1 kOhm	I max. 1 mA
		P133	T396 2x2 kOhm	I max. 1 mA
		P134	T396 2x5 kOhm	I max. 1 mA
		P135	T396 2x10 kOhm	I max. 1 mA
		More potentiometer on request!		

C	C... Encoder see page 118
---	---------------------------

N6 - DG - 01 Z P - A05 P134 - X

Special model

X	Special / customer-specific
---	-----------------------------


Attachment

Indicating label
Indicating label with engraving

Control switch

N6

1

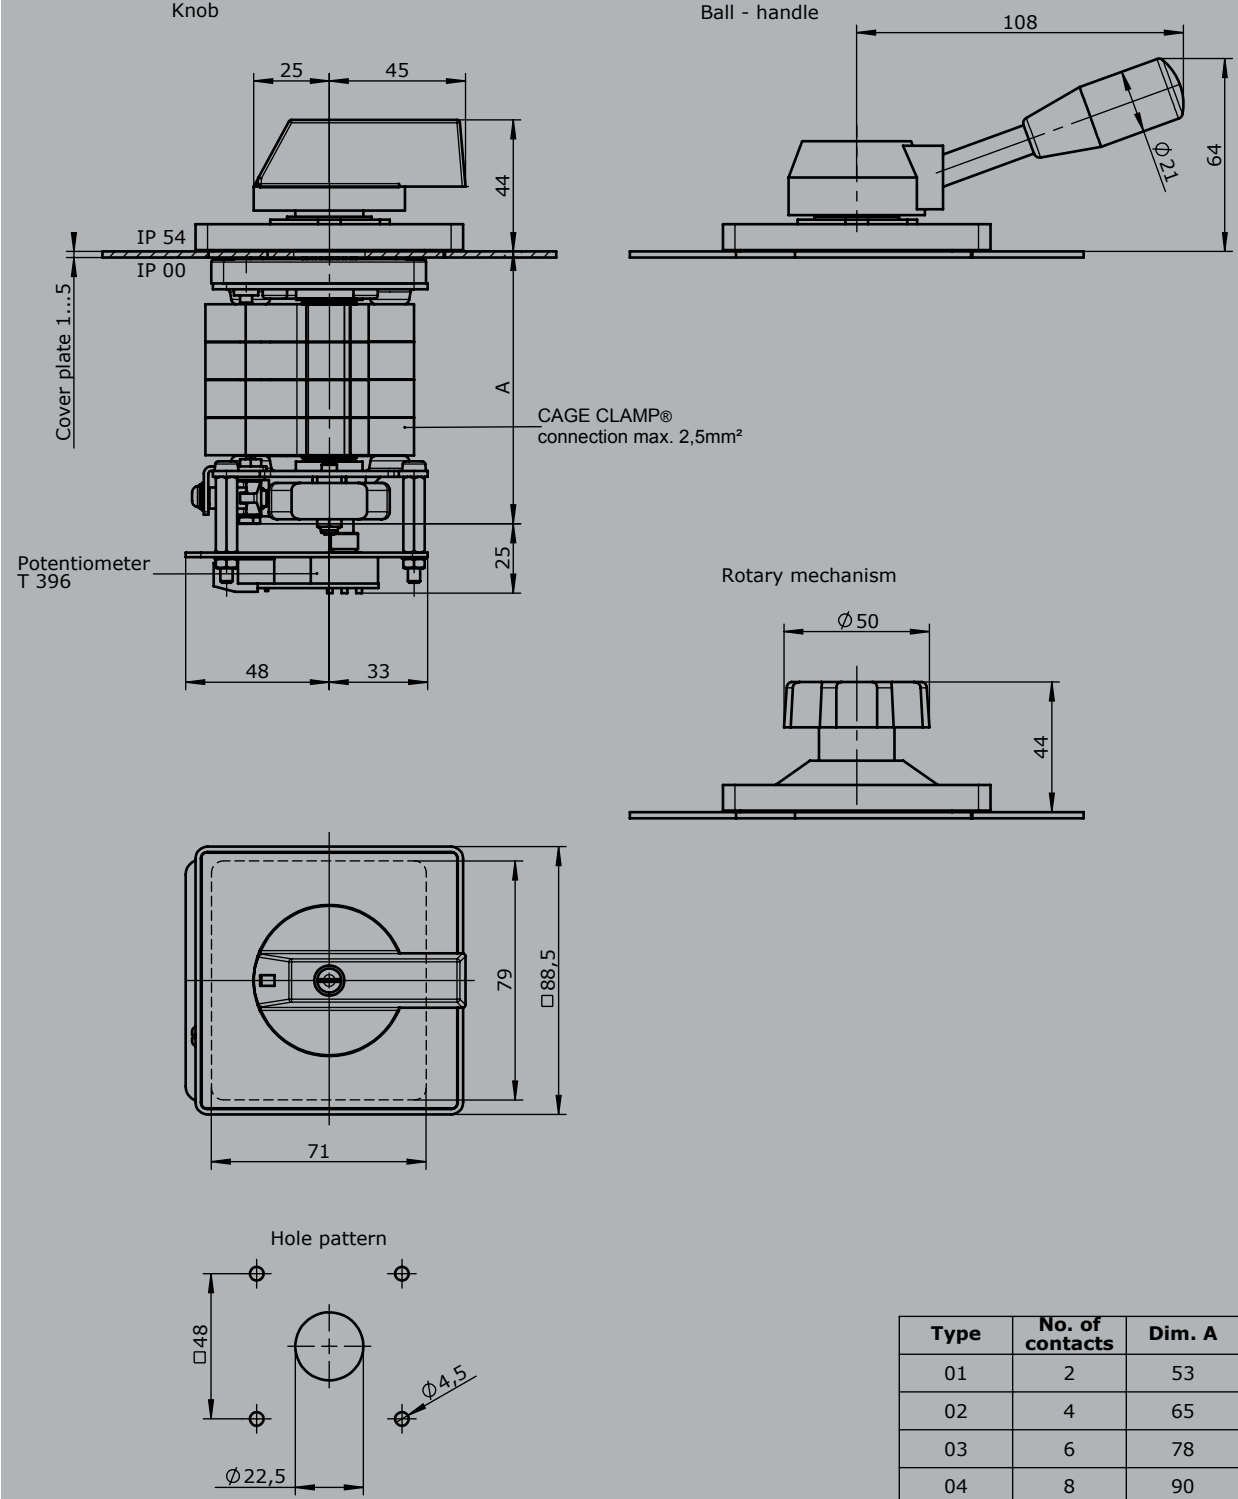

Type	No. of contacts	Dim. A	Spring return
01	2	53	+25
02	4	65	
03	6	78	
04	8	90	
05	10	103	
06	12	115	

Control switch N9



The control-switch N9 is a rugged switching device for hoisting applications. The modular design enables the switching device to be used universally.




Technical data

Mechanical life N9	10 million operating cycles
Operating temperature	-40°C til +60°C
Degree of protection	IP 54




		Example				
		N9	- 2 R P	- A05	P134	- X
Basic unit						
N9	Control switch with twist grip					
Axis 1: direction 3-4						
1	1 contact	Standard contact - arrangement see page 106 z.B. A98 MS 0 A05 MS 21 A99 contacts - arrangement according customer request				
2	2 contacts					
R	Friction brake (included in basic controller)					
(P)	Possibility of mounting potentiometer and encoder (Gessmann-types)					
P	Potentiometer	P131	T396 2x0,5 kOhm	I max. 1 mA		
		P132	T396 2x1 kOhm	I max. 1 mA		
		P133	T396 2x2 kOhm	I max. 1 mA		
		P134	T396 2x5 kOhm	I max. 1 mA		
		P135	T396 2x10 kOhm	I max. 1 mA		
		More potentiometer on request!				
	Hall-Potentiometer	P43	T1360 0,5...2,5...4,5V / 4,5...2,5...0,5V			
Special model						
X	Special / customer-specific					

Control switch N9

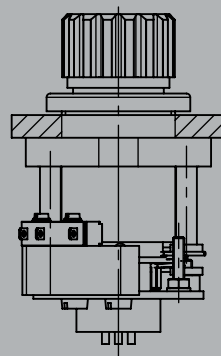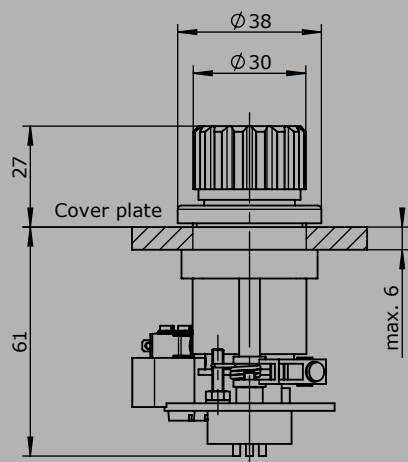

Hole pattern



Standard contact-arrangement for master switch

1

Type		Type
MS 11	<div> <div>0 1</div> </div>	A01
MS 12	<div> <div>0 1 2</div> </div>	A02
MS 13	<div> <div>0 1 2 3</div> </div>	A03
MS 14	<div> <div>0 1 2 3 4</div> </div>	A04
MS 21	<div> <div>1 0 1</div> </div>	A05
MS 22	<div> <div>2 1 0 1 2</div> </div>	A06
MS 212	<div> <div>2 1 0 1 2</div> </div>	A07
MS 222	<div> <div>2 1 0 1 2</div> </div>	A08
MS 23	<div> <div>3 2 1 0 1 2 3</div> </div>	A09
MS 213	<div> <div>3 2 1 0 1 2 3</div> </div>	A10

Type		Type
MS 24	<div> <div>4 3 2 1 0 1 2 3 4</div> </div>	A11
MS 214	<div> <div>4 3 2 1 0 1 2 3 4</div> </div>	A12
MS 224	<div> <div>4 3 2 1 0 1 2 3 4</div> </div>	A13
MS 25	<div> <div>5 4 3 2 1 0 1 2 3 4 5</div> </div>	A14
MS 26	<div> <div>6 5 4 3 2 1 0 1 2 3 4 5 6</div> </div>	A15
MS 0	<div> <div>0</div> </div>	A98

Contact arrangement special



Mechanical zero interlock
Break contact

Type		Type
MS 0	<div> <div>0</div> </div>	A...0


Standard contact-arrangement for master switch

Mechanical zero interlock

Front contact

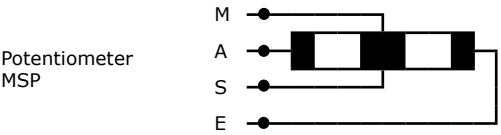


Micro change over
contact for control
handle with dead
man`s button signal
button push button



contact 5 05 = direction 1/4/5/8

contact 3 03 = direction 2/3/6/7



Deflection directions designated
DIN 15025

Utilization categories for control switches to IEC/EN 60947-5-1

Type of current	Utilization category	Typical examples of application	Normal conditions of use					
			Make			Breaker		
		I= current made, Ic= current broken Ie= rated operational current, U= voltage before make Ue= rated operational voltage Ur= recovery voltage T 0,95= time in ms, to reach 95% of the steady-state current. P= UE · Ie= steady-state power consumption in watts	I — le	U — Ue	cos	Ic — le	Ur — Ue	cos
alternating current	AC12	Control of resistive loads and solid state loads with isolation by opto couplers control of a.c. electromagnetic loads (> 72 VA)	1	1	0,9	1	1	0,9
	AC15		10	1	0,3	1	1	0,3
			I — le	U — Ue	t 0,95	Ic — le	Ur — Ue	t 0,95
Direct current	DC 12	Control of resistive loads and solid state loads with isolation by opto couplers Control of d.c. electromagnets	1	1	1 ms	1	1	1 ms
	DC 13		1	1	6 · P	1	1	6 · P

The value 6·P results from an empirical relationship with is found to represent most d.c. magnetic loads to an upper limit of P = 50 W viz 6·P = 300 ms. Loads having power consumption greater than 50 W are assumed to consist of smaller loads in parallel. Therefore 300 ms is to be an upper limit, irrespective of the power consumption value.

Attach our switching device		V6 S6 N61 N62	N6	VV6 DD64	V11	V5 S2-S23	VV5 SS2-SS21
Rated isolation voltage Ui in Volt		250		250	250	250	250
Rated operational voltage Ue in Volt		250		250	250	250	250
Rated operational current in Ampere	Ie AC 12	6 or 16		6 or 16	6 or 16	10	10
	AC 15	2		4 2	4 2	4 2	2
	DC 12	24 V 6		8 6	8 6	8 4	4
		48V 2		4 2	4 2	4 2	2
		110V 0,5		1 0,5	1 0,5	1 0,2	0,2
		220V 0,1		0,5 0,1	0,5 0,1	0,5 0,1	0,1
Contacts gold-coated	24V	5 mA		5 mA	5 mA	5 mA	5 mA
	DC 13	24V 1		1	1	3	3
		48V 0,5		0,5	0,5	1,5	1,5
		110V 0,2		0,2	0,2	0,1	0,1
		220V 0,05		0,05	0,05	0,05	0,05
Short-circuit-protection in Ampere Fuse Circuit-breaker G-characteristic	9L	6 6		16 6 16 6	6 6 16 6	16 10 16 10	10 10
Terminal screws Plug-in connector CAGE CLAMP® connection is a registered trademark of WAGO Kontakttechnik GmbH Germany		M 3,5 2,5mm ²		M 3,5 2,5mm ²	M 3,5 2,5mm ²	M 3,5 6,3x0,8	M3,5 6,3x0,8
Conductor sizes in mm ² finely stranded with end steeves		1,5		1,5	1,5	1,5	1,5
Mechanical life in million (operation cycles) max. switching frequency c/h 1000		10		20	10	6	10
Mechanical shock resistance IEC 68-2-27		Shock-amplitude > 15 Shock duration 20 ms					
Clearances and creepage distances IEC 947-1; 2.5.46.51		Overvoltage category III pollution grade 3					
Degree of protection to IEC/EN 60529				1. numeral protection of contact and foreign bodies		2. numeral protection of water	
		IP00		No protection		No protection	
		IP54		Protection deposits of dust		Protection splashing of water	
		IP65		Protection complete of dust		Protection hosed of water	
		IP66		Protection complete of dust		Protection hosed strong of water	

Technical details may vary based on configuration or application! Technical data subject to change without notice!

Attach our switching device	V8 V85 D8		VV8 VV85 D3 S3	V10 V25 S1	V14 S14	V3	Dead man`s button signal button push button
Rated isolation voltage Ui in Volt	110		110	110	250	500	250
Rated operational voltage Ue in Volt	110		110	110	250	350	250
Rated operational voltage in Ampere	le AC 12	2	2	2	6	16	6
	AC 15	0,5	0,5	0,5	2	4	2
	DC 12	24 V	2	2	6	8	4
		48V	1	1	2	4	2
		110V	0,1	0,1	0,5	1	0,2
		220V			0,1	0,5	0,1
Contacts gold-coated	24V	5 mA	5 mA	5 mA	5 mA	5 mA	5 mA
	DC 13	24V	1,5	1,5	1	1	3
		48V	0,5	0,5	0,5	0,5	1,5
		110V	0,05	0,05	0,2	0,2	0,1
		220V			0,05	0,05	0,05
Short-circuit-protection in Ampere Fuse	9L	4	4	4	6	16	6
Circuit-breaker G-characteristic		4	4	4	6	16	6
Terminal screws Plug-in connector CAGE CLAMP® connection is a registered trademarkt of WAGO Kontakttechnik GmbH Germany	Solder terminal				M4 1,5mm²	M 3,5 6,3x0,8	6,3 x 0,8
Conductor sizes in mm² finely stranded with end steeves	0,5		0,5	0,5	1	1,5	1,5
Mechanical life in million (operation cycles) max. switching frequency c/h 1000	8		12	8	6	6	10
Mechanical shock resistance IEC 68-2-27	Shock-amplitude > 15		Shock duration 20 ms				
Clearances and creepage distances IEC 947-1; 2.5.46.51	Overvoltage category III pollution grade 3						
Degree of protection to IEC/EN 60529	1. numeral protection of cont- act and foreign bodies			2. numeral protection of water		zweite Kennziffer Wasserschutz	
	No protection			No protection		kein Schutz	
	Protection deposits of dust			Protection splashing of water		Schutz gegen Spritzwasser	
	Protection complete of dust			Protection hosed of water		Schutz gegen Strahlwasser	
	Protection complete of dust			Protection hosed strong of water		Schutz gegen starkes Strahl- wasser	

Potentiometer with attach to our switching device

for mounting on		Typ		Capacity (W)		Imax wiper (mA)		Typ		Expansion		with centre tap life					Part No.		Addition for Part No.						
												2x0,5 kOhm	2x1 kOhm	2x2 kOhm	2x5 kOhm	2x10 kOhm									
												1	2	3	4	5									
V6 / VV6 D64 / DD64 V5 / VV5 V3 S2 / SS2 S6 N6 P7 P8	T 1420	1,5	10	P44	□	x	x	x	x	x		524004400	□	characteristic progressive *1 R= 2x 6,5 kOhm											
	T 132	2,5	10	P05	□	x	x	x	x	x		524000500	□												
	T 132 Öl	2,5	10	P06	□	x	x		x	x		524000600	□												
	T 178	1,5	10	P07	□		x	x	x			524000700	□												
	T 238	1	10	P08	□	x	x	x	x	x*1		524000800	□												
	T 133	60	85	P10	□	x						524001000	□												
	T 396	0,5	1	P13	□	x	x	x	x	x		524001300	□												
	T 1350 Ex	0,5	1	P14	□	x	x	x	x	x		524001400	□												
T 1360			P43							x	5240043009														
V8 / VV8 D8 P10 P11 P12	T 239	1	10	P17	□		x	x	x	x		524001700	□	with direction lines											
	T 301	0,5	1	P18	□		x	x	x	x		524001800	□												
	T 426	0,5	1	P19	□				x	x		524001900	□												
	T 432	0,5	1	P20	□				x			524002000	□												
	T 246	0,5	1	P21	□	x	x		x	x		524002100	□												
	T 362	0,5	1	P22	□		x	x	x			524002200	□												
	T 1003			P42							x	5240042009													
	T 1360			P43							x	5240043009													
V10 S1 Palm handle	T 321	1	10	P24	□		x					524002400	□	with direction lines											
	T 320	0,5	1	P25	□		x		x			524002500	□												
	T 430	0,5	1	P27	□				x			524002700	□												
	T 375	0,5	1	P37	□		x		x			524003700	□												
	T 997			P41							x	5240041009													
V11	T 316	1	10	P31	□				x*2			524003100	□	*2 R= 2x 4 kOhm											
	T 365	0,5	1	P32	□				x	x		524003200	□												
for mounting on		Typ		Capacity (W)		Imax wiper (mA)		Typ		Expansion		without centre tap life					Part No.		Addition for Part No.						
												0,5 kOhm	1 kOhm	2 kOhm	5 kOhm	10 kOhm									
												1	2	3	4	5									
V6 / VV6 D64 / DD64 V5 / VV5 V3 S2 / SS2 S6 N6 P7 / P8	T1491	1,5	10	P46	□	x	x	x	x	x		524004600	□												
	T 131	2,5	10	P03	□	x	x	x	x	x		524000300	□												
	T 131 Öl	2,5	10	P04	□		x		x	x		524000400	□												
	T 134	60	85	P11	□				x			524001100	□												
	T 374	0,5	1	P12	□	x	x	x	x	x		524001200	□												
V8 / VV8 /D8 P10/P11/P12	T 244	0,5	1	P23	□				x	x	x	524002300	□												
V10 / S1 Palm grip	T 337	0,5	1	P26	□		x	x	x	x		524002600	□												
GE1/GE2	PW 70	5	30	P45	□	x	x		x			524004500	□												

Hall-Potentiometer

HG 1



The Hall-Potentiometer HG1 is distinguished by its precision and longevity.

Technical data

Mechanical life	10 million operating cycles
Operation temperature	-40°C til +60°C
Degree of protection	IP 67



		HG1	- 60	- E1031	- X
<i>Example</i>					
Basic unit					
HG1	Hall-Potentiometer HG1				
Operating distance					
0-359° possible					
example 60° => 60					
Interface					
E1031	1 0,5...2,5...4,5V redundant counter-rotating Ub=4,75-5,25VDC				
	2 0,5...2,5...4,5V redundant co-rotating right-handed Ub=4,75-5,25VDC				
	3 0,5...2,5...4,5V redundant co-rotating left-handed Ub=4,75-5,25VDC				
E1091	2 0,5...2,5...4,5V right-handed Ub=9-32VDC				
	3 0,5...2,5...4,5V left-handed Ub=9-32VDC				
E2011	2 0...10...20mA right-handed				
	3 0...10...20mA left-handed				
E2091	2 4...12...20mA right-handed				
	3 4...12...20mA left-handed				
Special model					
X	Special / customer-specific				

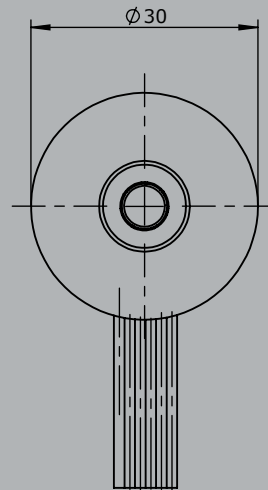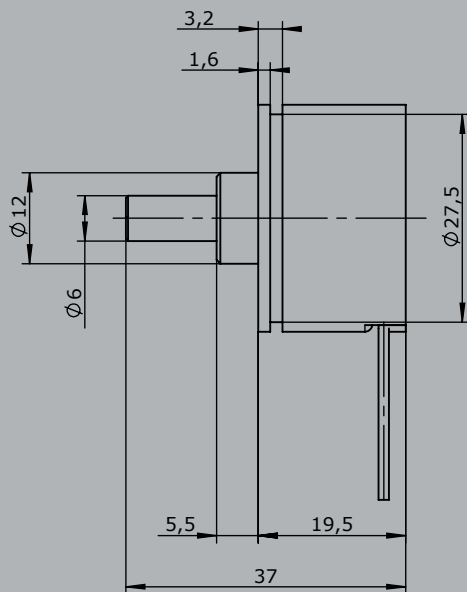

Opto-electronic encoder Output digital OEC 2 with attach to our switching device

Opto-electronical encoder OEC 2 with digital output gray-/binär-cdcode

Power supply	18-30VDC				
Rotation angle	max. +/-150° (by 9 Bit 300°)				
Digital output	8 Bit Gray-Code T359	Output characteristic linear	OEC 2-1-1	C01	410g
	8 Bit Binär-Code T359	Output characteristic linear	OEC 2-2-1	C02	410g
	6 Bit Gray-Code T359	Output characteristic linear	OEC 2-3-1	C031	410g
	6 Bit Gray-Code T359	Output characteristic quadratic	OEC 2-3-2	C032	410g
	6 Bit Binär-Code T359	Output characteristic linear	OEC 2-4-1	C041	410g
	6 Bit Binär-Code T359	Output characteristic quadratic	OEC 2-4-2	C042	410g
	9 Bit Gray-Code T384	Output characteristic linear one side clockwise	OEC 2-5-4	C054	410g
	9 Bit Gray-Code T384	Output characteristic linear one side anticlockwise	OEC 2-5-5	C055	410g
	9 Bit Binär-Code T384	Output characteristic linear one side clockwise	OEC 2-6-4	C064	410g
	9 Bit Binär-Code T384	Output characteristic linear one side anticlockwise	OEC 2-6-5	C065	410g

6 Bit-type T359

PIN connection	Colour-code
1 not connected	-
2 D4	brown
3 D3	green
4 D2	yellow
5 D1	grey
6 not connected	-
7 not connected	-
8 Housing 0 V	black
9 Input 18-30 V DC	red
10 not connected	-
11 not connected	-
12 Direction-signal left	violett
13 Direction-signal grey	grey-pink
14 D6	red-blue
15 D5	white-green
- Cable screen	brown-green


8-Bit-type T359

PIN connection	Colour-code
1 not connected	-
2 D6	brown
3 D5	green
4 D4	yellow
5 D3	grey
6 D2	pink
7 D1	blue
8 Housing 0 V	black
9 Input 18-30 V DC	red
10 not connected	-
11 not connected	-
12 Direction-signal left	violett
13 Direction-signal right	grey-pink
14 D8	red-blue
15 D7	white-green
- Cable screen	brown-green

9 Bit-type T384


PIN connection	Colour-code
1 not connected	-
2 D6	brown
3 D5	green
4 D4	yellow
5 D3	grey
6 D2	pink
7 D1	blue
8 Housing 0 V	black
9 Input 18-30 V DC	red
10 not connected	-
11 not connected	-
12 Direction-signal left	violett
13 D9	grey-pink
14 D8	red-blue
15 D7	white-green
- Cable screen	brown-green

6 Bit-type T359

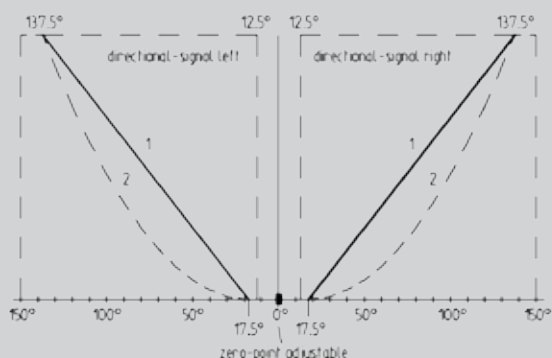

8 Bit-type T359

9 Bit-type T384

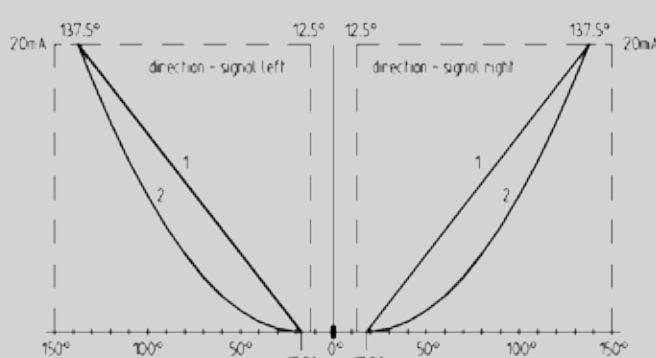

Opto-electronic encoder digital OEC 2 with attach to our switching device


Opto-electronical encoder OEC 2 with voltage output

Power supply	18-30VDC				
Scanning	6 Bit Gray-Code				
Rotation angle	max. +/-150°				
Voltage output	10...0...10V T366	Output characteristic linear	OEC 2-3-1-1	C111	410g
	10...0...10V T366	Output characteristic quadratic	OEC 2-3-2-1	C112	410g
	-10...0...+10V T367	Output characteristic linear	OEC 2-3-1-2	C151	410g
	-10...0...+10V T367	Output characteristic quadratic	OEC 2-3-2-2	C152	410g


Voltage output

PIN connection	Colour-code
1 not connected	-
2 not connected	-
3 not connected	-
4 not connected	-
5 not connected	-
6 not connected	-
7 not connected	-
8 Housing 0 V	blue
9 Input 18-30 V DC	brown
10 not connected	-
11 Voltage output	green
12 Direction signal left	yellow
13 Direction signal right	grey
14 not connected	-
15 not connected	-
- Cable screen	white

6 Bit-type T366

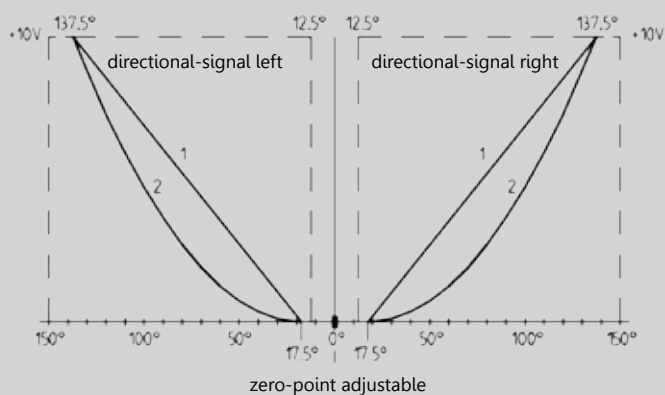

6 Bit-type T367

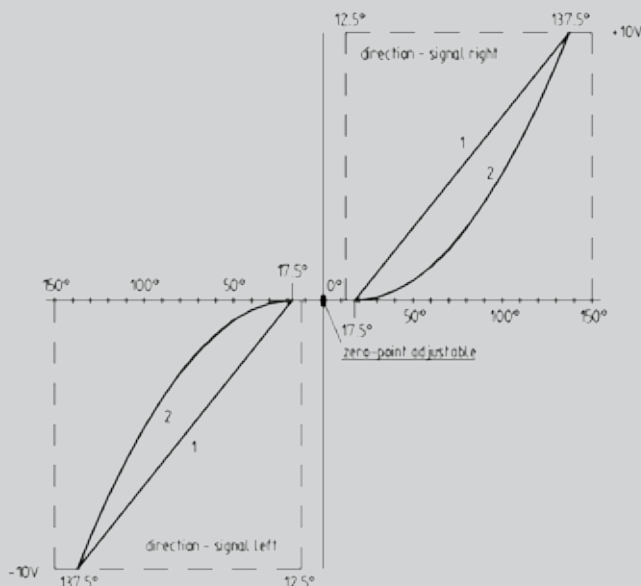

Opto-electronic encoder Output digital OEC 2 with attach to our switching device

Opto-electronical encoder OEC 2 with current output

Power supply	18-30VDC
Scanning	6 Bit Gray-Code
Rotation angle	max. +/-150°

Output current	20...4...20 mA T368	Output characteristic linear	OEC 2-3-1-5	C191	410g
	20...4...20 mA T368	Output characteristic quadratic	OEC 2-3-2-5	C192	410g
	20...0...20 mA T368	Output characteristic linear	OEC 2-3-1-8	C201	410g
	20...0...20 mA T368	Output characteristic quadratic	OEC 2-3-2-8	C202	410g
	-20...0...+20 mA T369	Output characteristic linear	OEC 2-3-1-6	C231	410g
	-20...0...+20 mA T369	Output characteristic quadratic	OEC 2-3-2-6	C232	410g


6 Bit-Type T368

PIN connection	Colour-code
1 not connected	-
2 not connected	-
3 not connected	-
4 not connected	-
5 not connected	-
6 not connected	-
7 not connected	-
8 Housing 0 V	blue
9 Input 18-30 V DC	brown
10 not connected	-
11 Current output	green
12 Direction signal left	yellow
13 Direction signal right	grey
14 not connected	-
15 not connected	-
- Cable screen	white


6 Bit-Type T369

PIN connection	Colour-code
1 not connected	-
2 not connected	-
3 not connected	-
4 not connected	-
5 not connected	-
6 not connected	-
7 not connected	-
8 Housing 0 V	blue
9 Input 18-30 V DC	brown
10 not connected	-
11 Current output	green
12 Direction signal left	yellow
13 Direction signal right	grey
14 not connected	-
15 not connected	-
- Cable screen	white

6 Bit-type T368

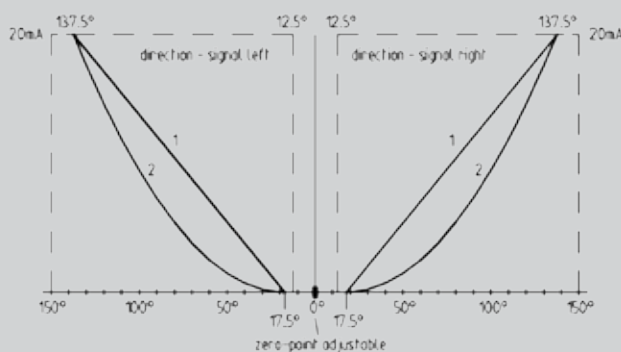

6 Bit-type T369

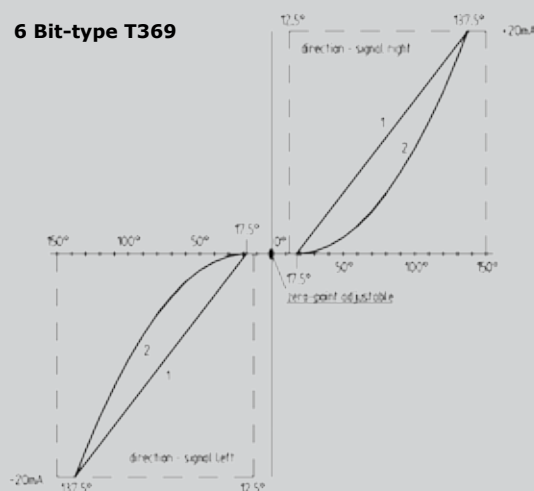

Attachment

Plug with cable 14x0,25 qmm, 2000 mm long, cable head open (for OEC 2 with digital outputs)	5300000495
Plug with cable 7x0,25 qmm, 2000 mm long, cable head open (for OEC 2 with analog outputs)	5300000496




The OEC 2 is able for mounting on V6,VV6/D64,DD64/V11/S2,SS2/S6/N6. For mounting a potentiometer mounting option (P) of the respective controller is required!

Opto-electronic encoder OEC 4 with interface Profibus DP

Opto-electronic encoder

Power supply	18-30VDC
Scanning	6, 8 or 9 Bit Gray-Code
Rotation angle	max. +/-150°
Interface	Profibus, DP, address 0-99 adjustable above selector switch

Voltage output	8 Bit Gray-Code T496 linear	OEC 4-1-1-2	C27	820g
	8 Bit Binary-Code T496 linear	OEC 4-2-1-2	C28	820g
	6 Bit Gray-Code T496 linear	OEC 4-3-1-2	C291	820g
	6 Bit Gray-Code T496 quadratic	OEC 4-3-2-2	C292	820g
	6 Bit Binary-Code T496 linear	OEC 4-4-1-2	C301	820g
	6 Bit Binary-Code T496 quadratic	OEC 4-4-2-2	C302	820g
	9 Bit Gray-Code T497 linear one sided right turn	OEC 4-5-4-2	C314	820g
	9 Bit Gray-Code T497 linear on sided left turn	OEC 4-5-5-2	C315	820g
	9 Bit Binary-Code T497 linear on sided right turn	OEC 4-6-4-2	C324	820g
	9 Bit Binary-Code T497 linear on sided left turn	OEC 4-6-5-2	C325	820g

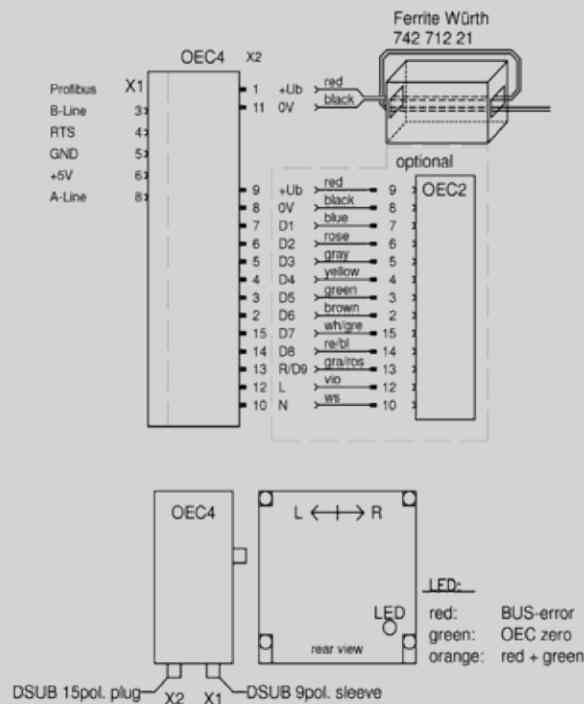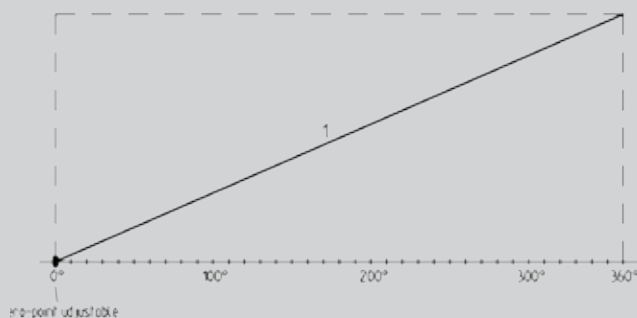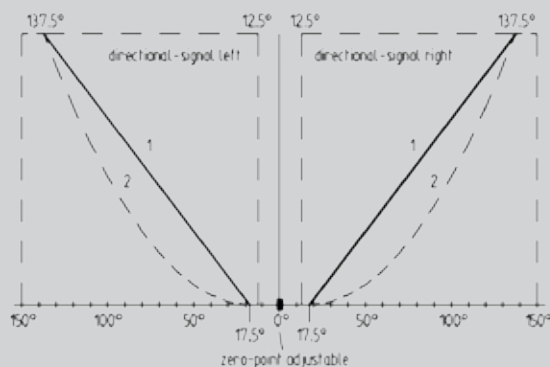

Attachment

Plug (Profibus) straight

Plug (Profibus) 90° angled

Plug with cable 2x0,25 qmm, 2000 mm long, cable head open (cable for current supply OEC 4 single application)

Plug with 2 cable (14x0,25 qmm, 2x0,25 qmm), cable head open (Connection cable OEC 4 / OEC 2 for OEC 2 incl. cable for current supply)

The OEC 4 is able for mounting on V6,VV6/D64,DD64/V11/S2,SS2/S6/N6. For mounting a potentiometer mounting option (P) of the respective controller is required! For a controller with one axis is required 1 piece of OEC 4, for a controller with 2 axis are required 1 piece of OEC 4 and 1 piece of OEC 2.

Electronic control unit ES/43



The electronic control unit ES/43 serves for control of proportional valves without position control. There is a version for 4 proportional valve solenoids (ES / 43-10) and a version for 2 Proportional valve solenoids (ES / 43-11) available.

Features:

- Stabilized voltage
- Chopper output stage with adjustable frequency
- Ramp time setting ON/OFF delay
- Creep speed circuit adjustable
- Solenoid current setting separate for minimum current and maximum current
- Output current controlled independently of temperature and solenoid
- Power output short-circuit-proof with overload protection
- Voltage input protected against polarity reversal
- Mechanical selection of direction by means of contacts
- LED operating voltage and working display
- Microprocessor technology therefore especially adaptable



Example


Technical data:

- Supply voltage		10...	32 V DC
- Residual ripple		20%	
- Control voltage range	Ue	0...	5V
- Control current	Ie	< 1 mA	
- Dither frequency	f	25...	250 Hz
- Proportional valve S 1-4	I min.	0...	1 A
Output	I max. = I min ...		2 A at 12 Volt
Output	I max. = I min ...		1 A at 24 Volt
- Ramp time setting	t on	0,2...	25 sec
	t off	0,2...	25 sec
- Creep speed	variable reduction		25...75%
- Operating temperature	-20°C til +60°C		
- Storage temperature	-40°C til +80°C		


Electronic control unit for 4 proportional valves solenoid ES/43-10

Electronic control unit for 2 proportional valves solenoid ES/43-11

ES / 43-10
4 Proportional valves-solenoid

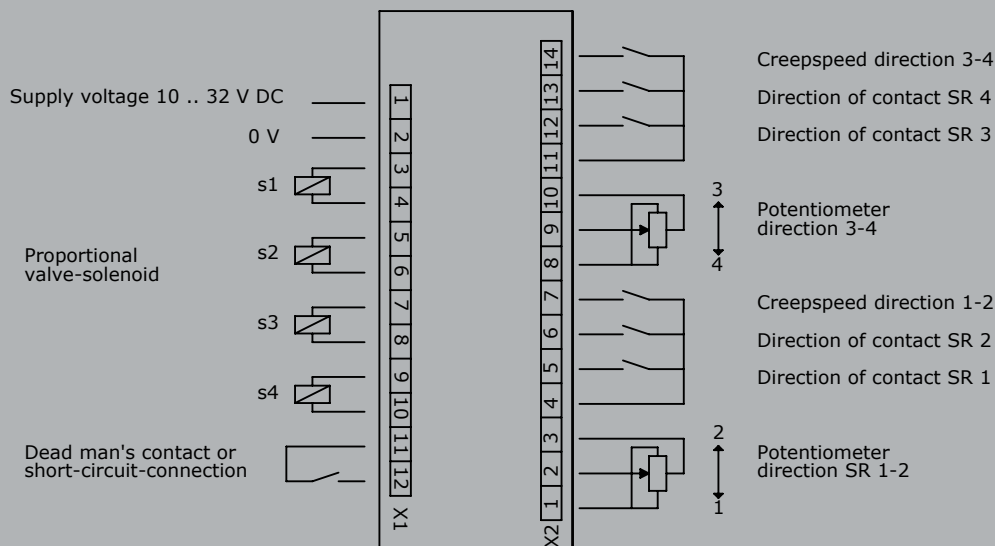

ES / 43-11
2 Proportional valves-solenoid

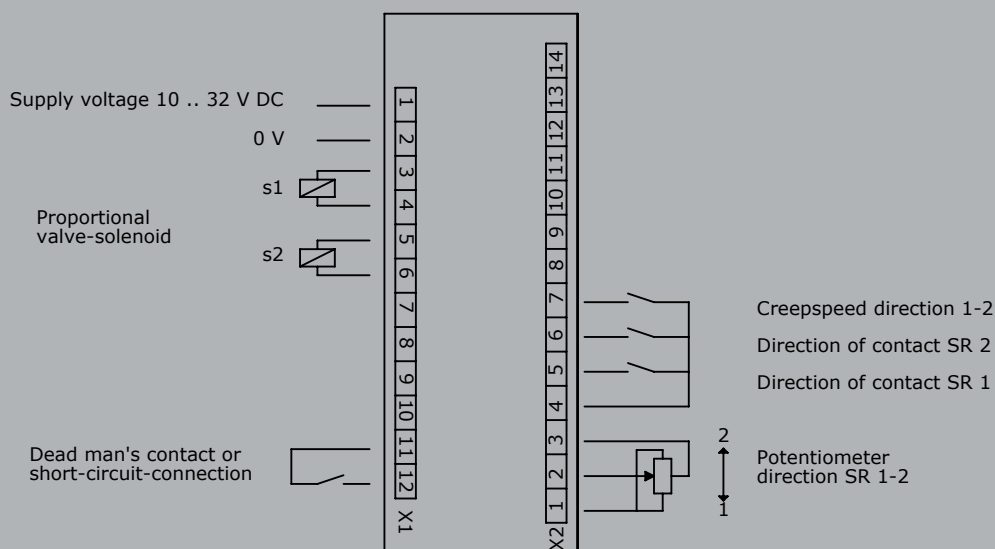

Palm grip MATRIX with attach to our switching device

Controllers	Palm grip																
	B1	B2	B3	B4	B5	B6	B7 / B8	B9	B10	B14 / B15	B20	B22	B23	B24	B25	B28	B29
V6 / VV6	X	X	X *1	X	X	X			X	X		X		X		X	
V11	X			X	X	X			X	X		X		X		X	
V8 / VV8	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
V85 / VV85	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
V25	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
V24	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
V14				X	X	X						X					
D64 / DD64									X								
D8									X								
D3									X								
S2 / SS2	X*2,3			X*3	X	X*3			X*3			X*3		X*3		X*3	
S22 / SS22	X*2,3			X*3	X	X*3			X*3								
S26	X*3			X*3	X	X*3			X*3			X*3		X*3		X*3	
S6	X				X												

*1 deflection limited to 28°

*2 only B1-T possible

*3 only possible with Type A

Hall-push button

HD

The hall-push button impressed by its durability and versatility. It is available in three basic versions. By combining different lighting options, colors and symbols, it is possible to customize.

Technical data

Mechanical life	10 million operating cycles
Operation temperature	-40°C til +60°C
Degree of protection	IP 67



2

		Example						
		HD1	- 2	- 1	- 1	- 1	- E02	- X
Basic unit								
HD1	Hall-push button digital with bellow							
HD2	Hall-push button digital without bellow							
HD3	Hall-push button digital, flat mounting without bellow							
Illumination								
1	Unlighted							
2	Night light white, U_LED=4,5-5,5V							
3	Functional lighting 2-colored red-green (single shiftable) U_LED=4,5-5,5V							
4	Functional lighting 2-colored red-white (single shiftable) U_LED=4,5-5,5V							
5	Functional lighting 2-colored green-white (single shiftable) U_LED=4,5-5,5V							
Colour actuator								
1	Transparent							
2	Black*							
*Only possible by unlighted push button!								
Icon platelets								
1	White transparent*							
2	White							
3	Yellow							
4	Green							
5	Blue							
6	Black							
7	Red							
8	Orange							
*Print on back side possible, thereby the print is resistant to abrasion!								

Technical details may vary based on configuration or application! Technical data subject to change without notice!



Hall-push button

HD


		HD1	- 2	- 1	- 1	- 1	- E01	- X
Symbol								
1	Without							
2	Buzzer							
3	Arrow up							
4	Arrow down							
5	Turtle							
6	Rabbit							
X	Custom-made							
Interface								
E0101	Push button signal not redundant Ub=4,5-5,5VDC							
E0111	Push button signal redundant Ub=4,5-5,5VDC							
E0201	Push button signal not redundant Ub=4-32VDC							
E0211	Push button signal redundant Ub=4-32VDC							
	1 Possible for optocoupler and SPS							
	2 Power switch (Open Drain) I_Hallmax=25mA							
Special model								
X	Special / customer-specific							

Hall-push button HD


Edition:
HD1

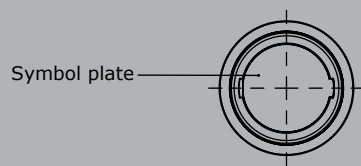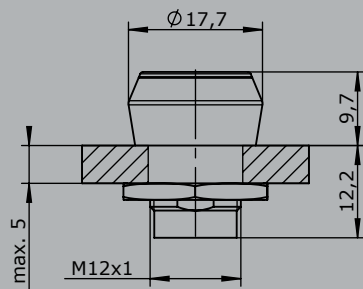


Hole pattern





Edition:
HD3



Hole pattern



Edition:
HD2



Palm grip

B1






The palm grip B1 has different equipment options for many requirements. It is compatible with our multi-axis controller or mounted on hydraulic drives. The palm grip has a highly flexible cable (4 respectively 8x0,25 qmm, 450 mm long). The mounting piece can be supplied with a tapped hole M10 (standard) or M8.

Technical data

Operating temperature	-40°C til +60°C
Degree of protection	IP 54
Contact complement	3A 24VDC13 (*1 1,5A 24VDC13)



	B1	- 2D	W	- X
<i>Example</i>				
Basic unit				
B1	Palm grip			
Digital actuating element				
D	Push button top			
D	Push button side *1			
W	Rocker switch top T-0-T			
W	Rocker switch top R-0-T			
W	Rocker switch top R-0-R			
T	Push button top with mechanical operation			
	(only possible with multi-axis controller or single-axis controller!)			
K	Lever switch			
KT	Lever switch mechanical operation			
	(only possible with multi-axis controller or single-axis controller!)			
Special model				
X	Special / customer-specific			

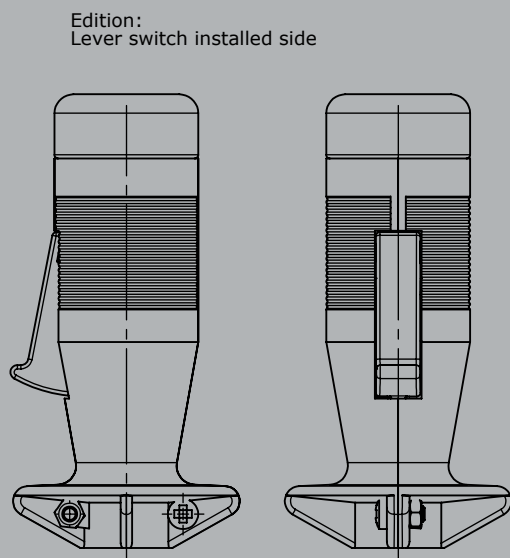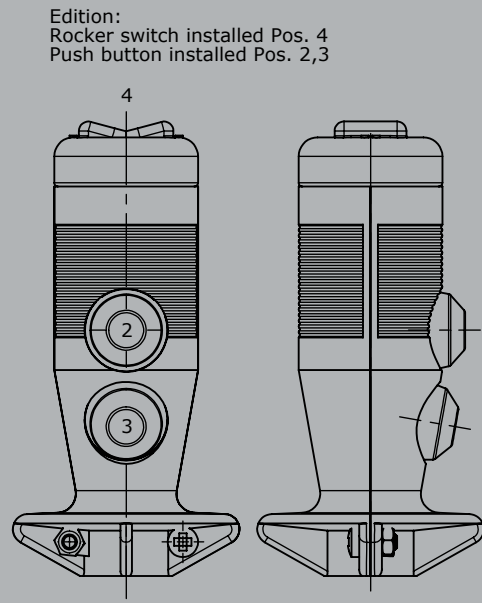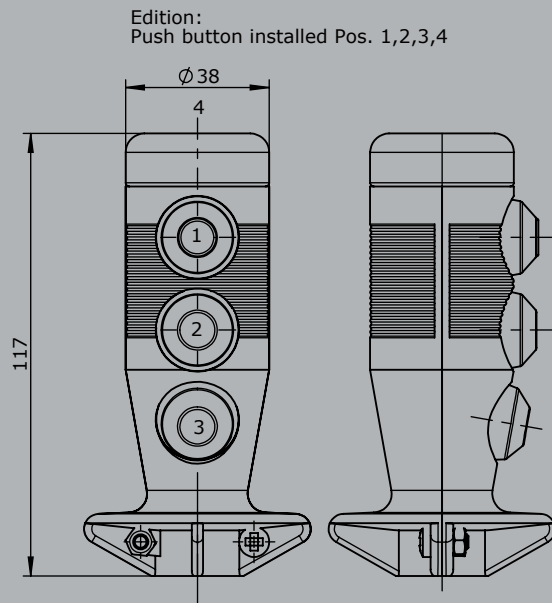

Palm grip B2



The palm grip B2 has different equipment options for many requirements. It is compatible with our multi-axis controller or mounted on hydraulic drives. The palm grip has a highly flexible cable (8x0,25 qmm, 450 mm long). He can be tilted in any direction by 20 degrees and can lock in this position. The mounting piece can be supplied with a tapped hole M10 (standard) or M8.

Technical data




Operating temperature	-40°C til +60°C
Degree of protection	IP 54
Contact complement	1,5A 24VDC13 (*1 0,1A 24VDC13)




	B2	Example - 2D	PA15	- X
Basic unit				
B2	Palm grip			
Digital actuating element				
D	Push button KDA/70			
D	Push button KDA21 *1			
	Colour: red, black, yellow, green, blue, white, orange			
A15	2 Push button Pos. 9+10 interlocked			
Analog actuating element				
PA15	Push button analog Pos. 9+10			
	2 potentiometer T301 2x5 kOhm with direction contacts			
Special model				
X	Special / customer-specific			

B2


Edition:
Pusher installed Pos. 1,2

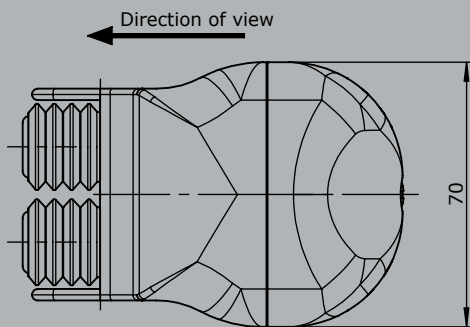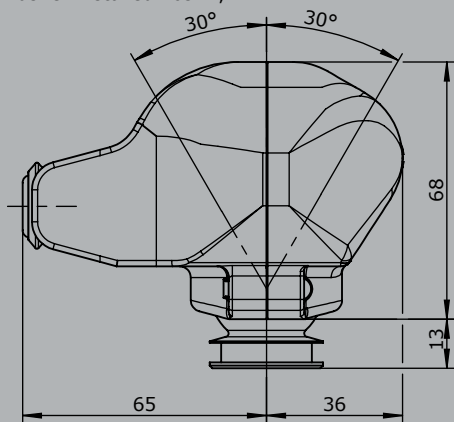

Edition:
Push button KDA / 70
installed Pos. 1,2,3,4

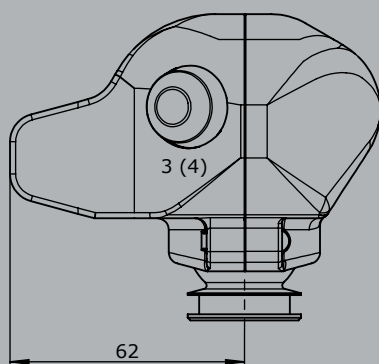

Edition:
Push button KDA 21
installed 1,2,3,4

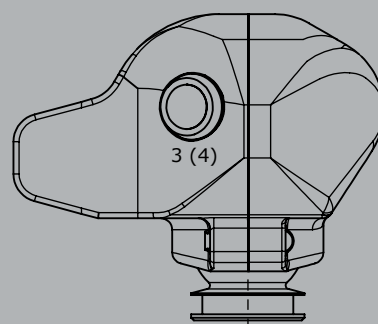

Palm grip B3



The palm grip B3 has different equipment options for many requirements.
It is compatible with our multi-axis controller or mounted on hydraulic drives.
The palm grip has a highly flexible single wire (0,1 qmm, 450 mm long).
The mounting piece can be supplied with a tapped hole 12 mm (standard) or 10 mm.

Technical data

Operating temperature	-40°C til +60°C
Degree of protection	IP 65
Contact complement	1,5A 24VDC13 (*1 0,1A 24VDC13)



		Example							
		B3	- 2D	W	K	SE	PA11	PA13	- X
Basic unit									
B3L	Palm grip left								
B3R	Palm grip right								
Digital actuating element									
D	Push button								
	Colour: red, black, yellow, green, blue, grey								
D	Push button KDA21 *1								
	Colour: red, black, yellow, green, blue, white, orange								
W	Rocker switch T-0-T								
W	Rocker switch 0-T								
W	Rocker switch R-0-T								
W	Rocker switch R-0-R								
W	Rocker switch 0-R								
W	Rocker switch R-R								
K	Lever switch								
SR	Sliding switch								
ST	Sliding switch								
ZD	Push button with 2 steps								
A12	Push button Pos. 11-12								
A11	Thumbwheel T-0-T								
A11	Thumbwheel R-0-R								
	L left, R right								
A13	Rotary grip T-0-T								
SE	Sensor button capacitive								
S	Sensor button capacitive without external control electronics								
	(consistent with V85/VV85 and V25 with interface E4xx+E5xx)								
V	Vibration								

Technical details may vary based on configuration or application! Technical data subject to change without notice!

B3L - 2D W K SE PA11R PA13 - X

Analog actuating element


PA11	Thumbwheel
	Potentiometer T375 2x5 kOhm with direction contacts
H11	Thumbwheel
	Hall-Potentiometer T997
	Output 0,5...2,5...4,5V redundant opposite
	L left, R right
PA12	Push button analog Pos. 11+12
	Potentiometer T375 2x5 kOhm with direction contacts
H12	Push button analog Pos. 11+12
	Hall-Potentiometer T997
	Output 0,5...2,5...4,5V redundant opposite
PA13	Rotary handle
	Potentiometer T375 2x5kOhm with direction contacts
H13	Rotary handle
	Hall-Potentiometer T997
	Output 0,5...2,5...4,5V redundant opposite

Special model



X	Special / customer-specific
---	-----------------------------

Palm grip B3


B3

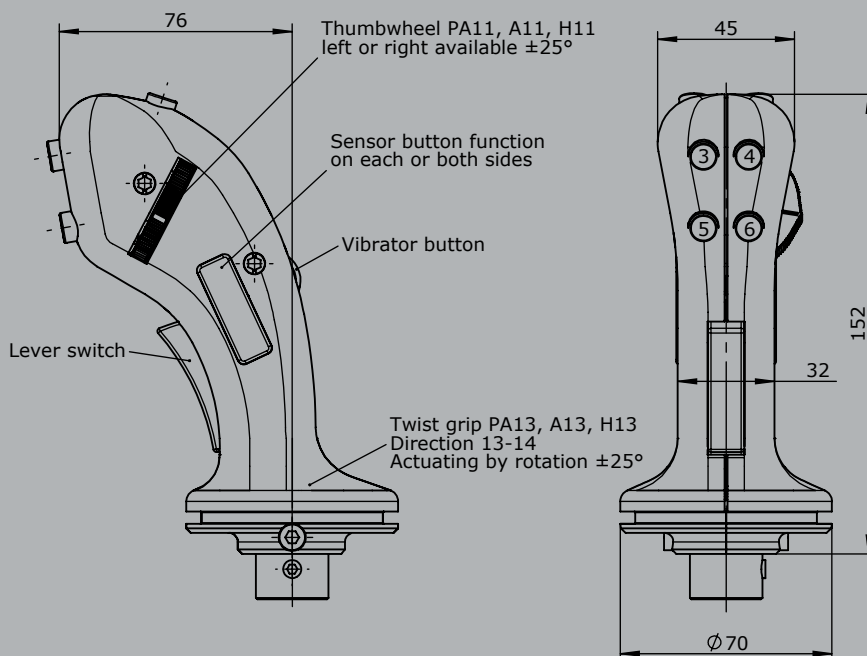


() = Installation right

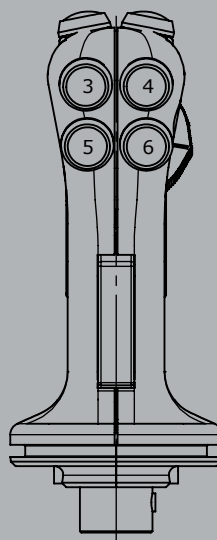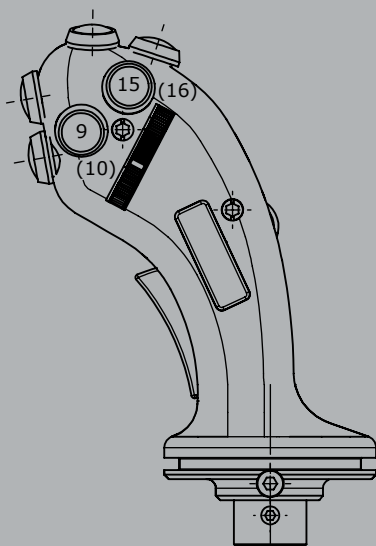


Edition:
Push button
installed Pos. 1,2

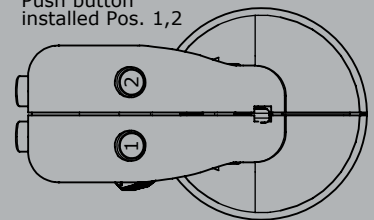


Edition:
Rocker switch
installed Pos. 7+8

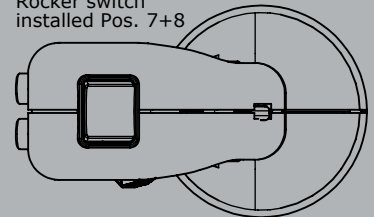


Edition:
Sliding switch
installed Pos. 13 + 14
Drive with potentiometer PA12 bzw.
Push button with 2 steps ZD
installed Pos. 11,12

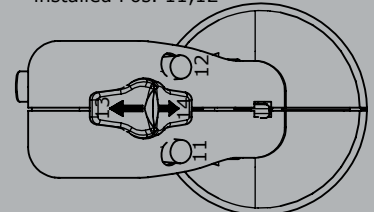

Edition:
Push button
installed Pos. 1,2,7,8

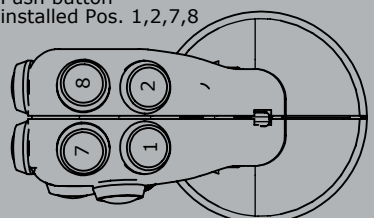

Edition:
Rocker switch
installed Pos. 7 + 8
Push button
installed Pos. 1,2

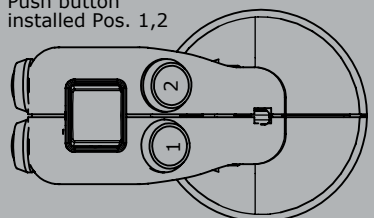

Palm grip
B5



The palm grip B5 has different equipment options for many requirements. It is compatible with our multi-axis controller or mounted on hydraulic drives. The palm grip has a highly flexible single wire (4 respectively 8x0,25 qmm, 450 mm long). The mounting piece can be supplied with a tapped hole M10 (standard) or M8.

Technical data

Operating temperature	-40°C til +60°C
Degree of protection	IP 54
Contact complement	3A 24VDC13 (*1 1,5A 24VDC13)




2


		Example			
		B5	- 2D	W	- X
Basic unit					
B5	Palm grip				
Digital actuating element					
D	Push button top				
D	Push button side *1				
W	Rocker switch top T-0-T				
W	Rocker switch top R-0-T				
W	Rocker switch top R-0-R				
T	Push button top mechanical operation (only possible in combination with multi-axis controller or single-axis controller!)				
Special model					
X	Special / customer-specific				

Technical details may vary based on configuration or application! Technical data subject to change without notice!

Edition:
Push button installed Pos. 1,2,3

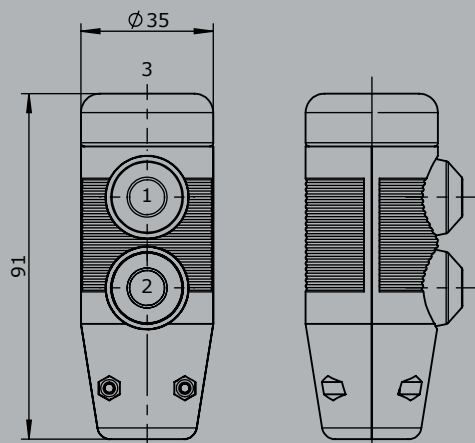

Edition:
Rocker switch installed Pos. 3
Push button installed Pos. 2

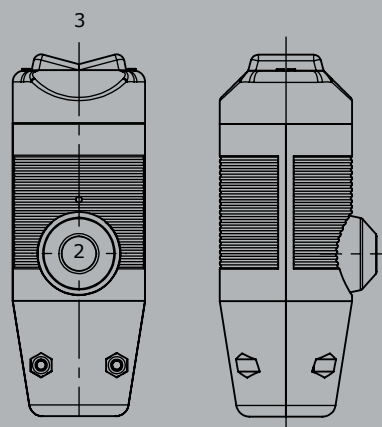

Palm grip B6



The palm grip B6 has different equipment options for many requirements. It is compatible with our multi-axis controller or mounted on hydraulic drives. The palm grip has a highly flexible cable (4 respectively 8x0,25 qmm, 450 mm long). The mounting piece can be supplied with a tapped hole M10 (standard) or M8.

Technical data

Operating temperature	-40°C til +60°C
Degree of protection	IP 54
Contact complement	1,5A 24VDC13




Example


	B6	- 2D	K	- X
Basic unit				
B6 Palm grip				
Digital actuating element				
D Push button top				
W Rocker switch top T-0-T				
W Rocker switch top R-0-T				
W Rocker switch top R-0-R				
K* Lever switch				
* Included with the delivery of palm grip B6!				
Special model				
X Special / customer-specific				

B6

Edition:
Lever switch side
Rocker switch installed top

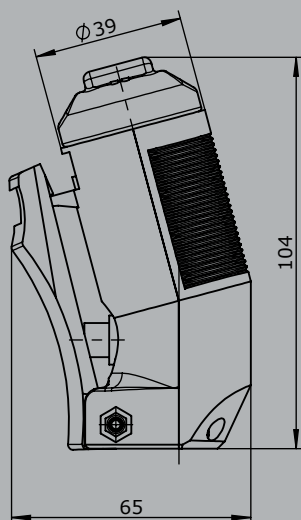

Edition:
Lever switch side
Push button top

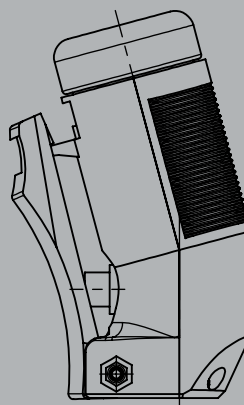

Palm grip B7 / B8



The palm grip B7 / B8 has different equipment options for many requirements. It is compatible with our multi-axis controller or mounted on hydraulic drives. The palm grip has a highly flexible single wire (0,1 qmm, 450 mm long). The mounting piece for the drive rod can be supplied with a tapped hole 12 mm (standard) or 10 mm.

Technical data

Operating temperature	-40°C til +60°C
Degree of protection	IP 65
Contact complement	1,5A 24VDC13 (*1 0,1A 24VDC13)




Example

	B7	- 2D	W	K	SE	S9	PA13	- X
Basic unit								
B7 Palm grip left								
B8 Palm grip right								
Digitale actuating element								
D Push button								
Colour: red, black, yellow, green, white, orange								
D Push button KDA21 *1								
Colour: red, black, yellow, green, blue, white, orange								
W Rocker switch T-0-T								
W Rocker switch 0-T								
W Rocker switch R-0-T								
W Rocker switch R-0-R								
W Rocker switch 0-R								
W Rocker switch R-R								
K Lever switch								
A13 Rotary grip T-0-T								
SE Sensor button capacitiv with external control electronics								
S Sensor button capacitiv without external control electronics (consistent with V85/VV85 and V25 with interface E4xx+E5xx)								
V Vibration								
Impulse 24VDC ED 100%								
Analog actuating element								
S9 Hall-thumb rocker (see page 99)								
Output 0,5...2,5...4,5V redundant opposite								
V21 Hall-minijoystick (see page 43)								
Output 0,5...2,5...4,5V redundant opposite								
P13 Rotary grip								
Potentiometer T375 2x5 kOhm with direction contacts								
H13 Rotary grip								
Hall-Potentiometer T997								
Output 0,5...2,5...4,5V redundant opposite								
Special model								
X Special / customer-specific								

Technical details may vary based on configuration or application! Technical data subject to change without notice!

B7

Edition:
Push button installed Pos. 1 - 8

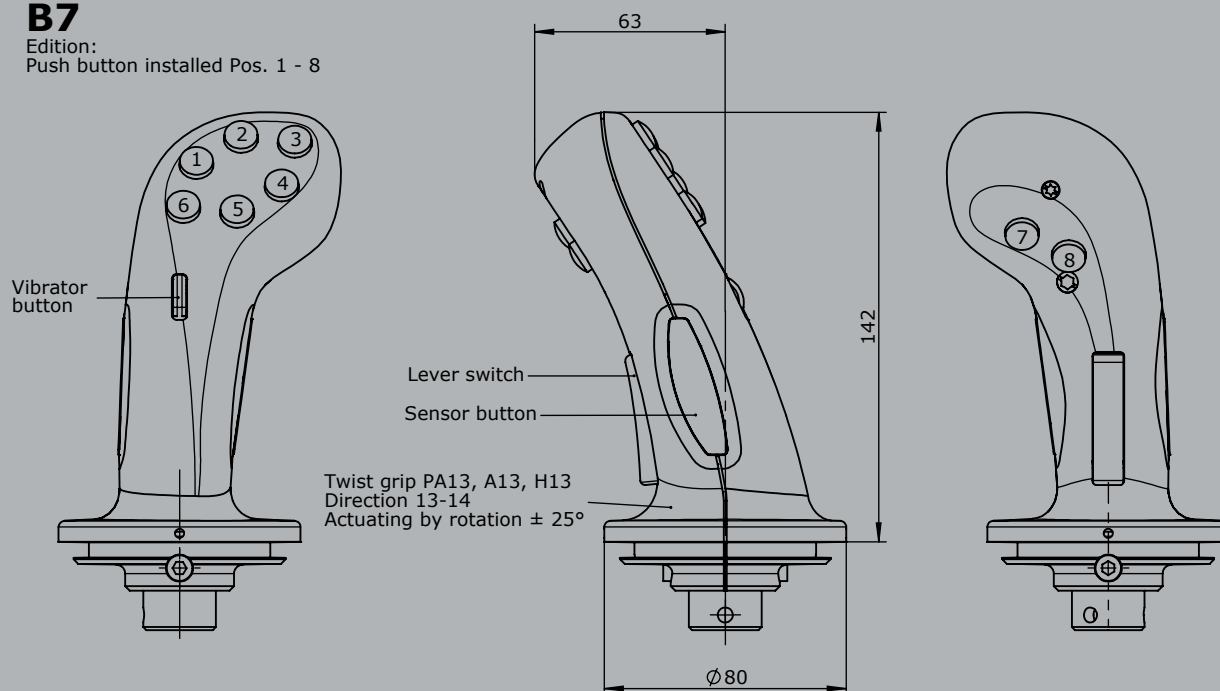


B8

Edition:
Push button installed Pos. 1 - 8

Edition:
Multi-axis controller V21
Push button installed Pos. 5,6,7,8

Edition :
Hall Rocker switch
Push button installed Pos. 1,5,6,8

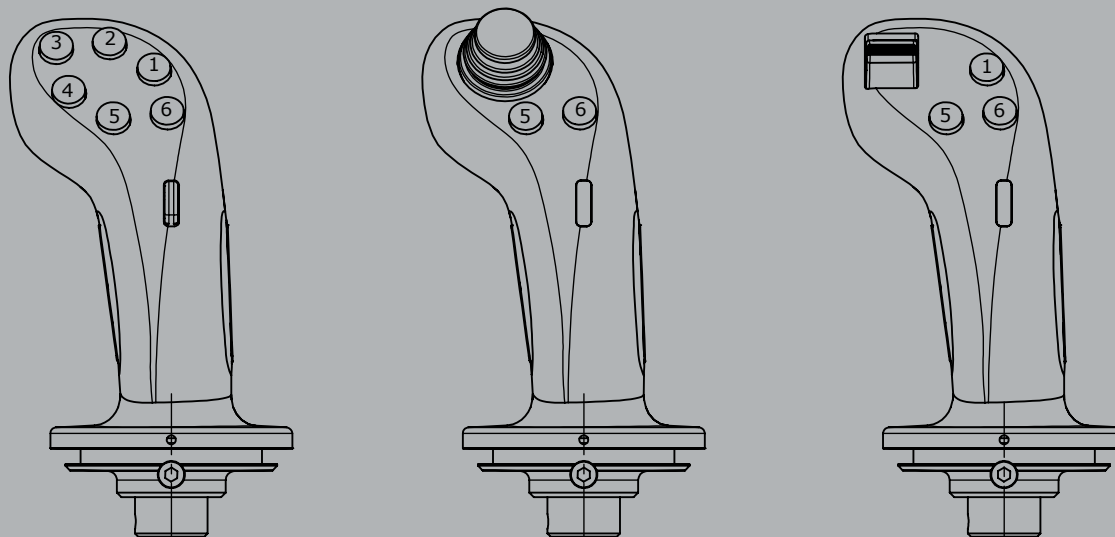

Palm grip B9



The palm grip B9 has different equipment options for many requirements. It is compatible with our multi-axis controller or mounted on hydraulic drives. The palm grip has a highly flexible single wire (0,1 qmm, 450 mm long). The mounting piece for the drive rod can be supplied with a tapped hole 12 mm (standard) or 10 mm.

Technical data

Operating temperature	-40°C til +60°C
Degree of protection	IP 65
Contact complement	1,5A 24VDC13





Example

	B9	- 2D	KT	A13	PA11	PA13	- X
Basic unit							
B9 Palm grip							
Digital actuating element							
D Push button							
Colour: red, black, yellow, green, blue, white							
KT Cross switch T-0-T/T-0-T							
KR Cross switch R-0-R/R-0-R							
A11 Rocker switch T-0-T Pos. 11+12							
A11 Rocker switch R-0-R Pos. 11+12							
A13 Rotary grip T-0-T							
Analog actuating element							
V21 Hall-minijoystick							
Output 0,5...2,5...4,5V redundant opposite							
PA11 Rocker analog Pos. 11+12							
Potentiometer T394 2x5 kOhm with direction contacts							
H11 Rocker analog Pos. 11+12							
Hall-Potentiometer T997							
Output 0,5...2,5...4,5V redundant opposite							
PA13 Rotary grip							
Potentiometer T375 2x5 kOhm with direction contacts							
H13 Rotary grip							
Hall-Potentiometer T997							
Output 0,5...2,5...4,5V redundant opposite							
Special model							
X Special / customer-specific							


B9

Edition :
Push button installed Pos. 1 - 8
Cross switch fast

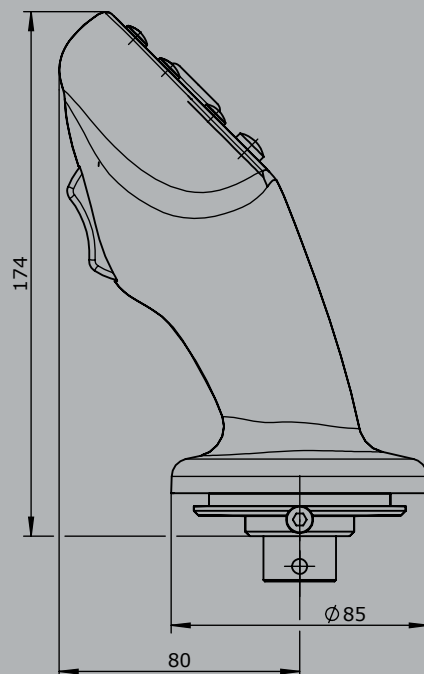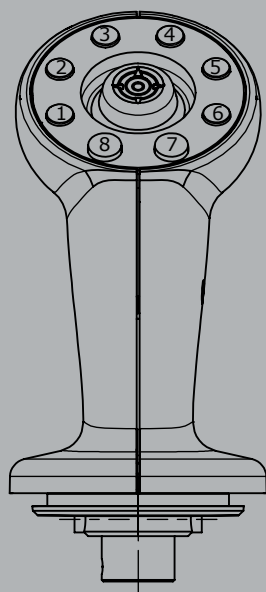


Rocker PA11, A11, H11
Direction 11-12

Twist grip PA13, H13
Direction 13-14
Actuating by rotating $\pm 25^\circ$

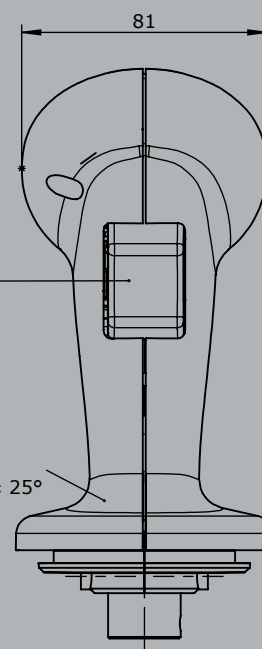

Edition :
Push button installed Pos. 1 - 8
Multi-axis controller V21

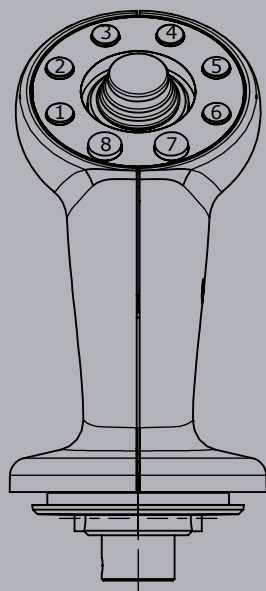

Palm grip B10



The palm grip B10 has different equipment options for many requirements.
It is compatible with our double-handle controller or mounted on hydraulic drives.
The palm grip has a highly flexible single wire (0,1 qmm, 450 mm long).
The mounting piece for the drive rod can be supplied with a tapped hole 10 mm.

Technical data

Operating temperature	-40°C til +60°C
Degree of protection	IP 65
Contact complement	1,5A 24VDC13 (*1 0,1A 24VDC13)




2

		Example				
		B10AL	- 3D	W	V	- X
Basic unit						
B10L	Palm grip left					
B10R	Palm grip right					
B10AL	Palm grip left with growing part					
B10AR	Palm grip right with growing part					
Digital actuating element						
D	Push button KDA21 *1					
	Colour: red, black, yellow, green, blue, white, orange					
W*	Rocker switch T-0-T					
W*	Rocker switch 0-T					
W*	Rocker switch R-0-T					
W*	Rocker switch R-0-R					
W*	Rocker switch 0-R					
W*	Rocker switch R-R					
*Only possible with version with attachment!						
V	Vibration pulse 24VDC ED 100%					
Special model						
X	Special / customer-specific					


Technical details may vary based on configuration or application! Technical data subject to change without notice!

B10

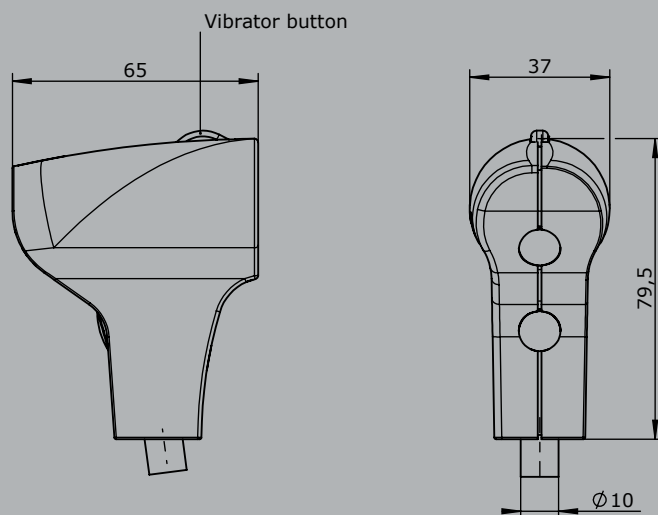


B10A

Edition installed left:
Push button installed Pos. 1,2,3
Rocker switch

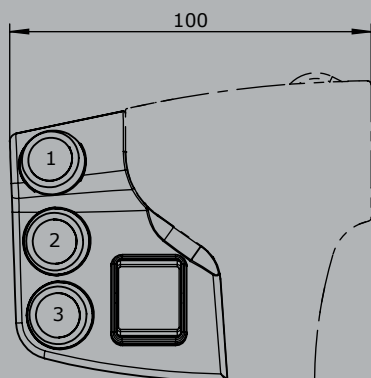

Edition installed right:
Push button installed Pos. 4,5,6
Rocker switch

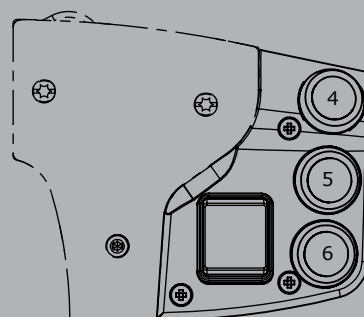

Palm grip B14 / B15



The palm grip B14/B15 has different equipment options for many requirements. It is compatible with our multi-axis and single-axis controller or mounted on hydraulic drives.
 The palm grip has a highly flexible single wire (0,1 qmm, 450 mm long).
 The mounting piece for the drive rod can be supplied with a tapped hole 12 mm (standard) or 10 mm.

Technical data

Operation temperature	-40°C til +60°C
Degree of protection	IP 65
Contact complement	0,1A 24VDC13




2

		Example		
		B14	- 2D	- X
Basic unit				
B14	Palm grip left			
B15	Palm grip right			
Digital actuating element				
D	Push button KDA21 (0,1A 24VDC13)			
	Colour: red, black, yellow, green, blue, white, orange			
Special model				
X	Special / customer-specific			

B14

Push button installed Pos. 1,2

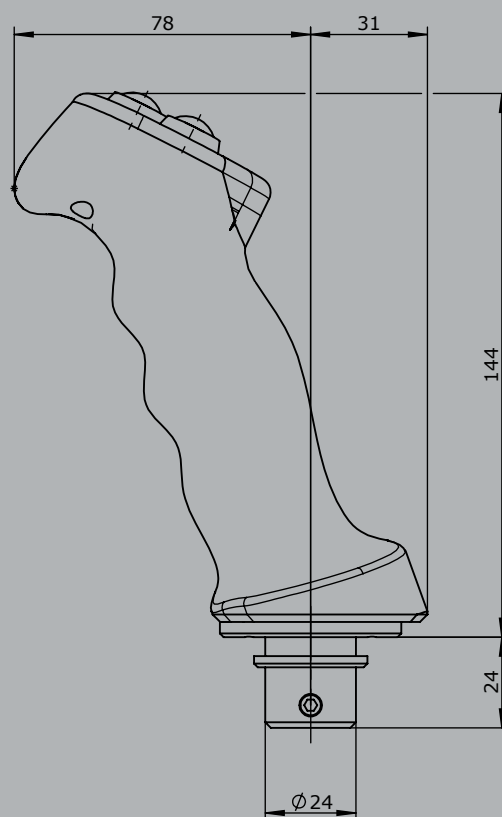

B15

Push button installed Pos. 1,2



Palm grip B20



The palm grip B20 has different equipment options for many requirements.
It is compatible with our multi-axis controller or mounted on hydraulic drives.
The palm grip has a highly flexible single wire (0,1 qmm, 450 mm long).
The mounting piece for the drive rod can be supplied with a tapped hole 12 mm.


Technical data

Operating temperature	-40°C til +60°C
Degree of protection	IP 65
Contact complement	1,5A 24VDC13 (*1 0,1A 24VDC13)




		B20L	- 2D	Example W	K	V21	H13	- X
Basic unit								
B20L	Palm grip left with hand pad							
B20R	Palm grip right with hand pad							
Digital actuating element								
D	Push button KDA21 *1 Colour: red, black, yellow, green, blue, white, orange							
HD	Hall-push button (see page 125)							
W	Rocker switch T-0-T							
W	Rocker switch 0-T							
W	Rocker switch R-0-T							
W	Rocker switch R-0-R							
W	Rocker switch 0-R							
W	Rocker switch R-R							
K	Lever switch							
KT	Cross switch T-0-T/T-0-T							
V	Vibration Impulse 24VDC ED 100%							
Analog actuating element								
S9	Hall-Thumb rocker Output 0,5...2,5...4,5V redundant opposite							
V21	Hall-minijoystick Output 0,5...2,5...4,5V redundant opposite							
P9	Thumbwheel Potentiometer 5kOhm							
H13	Hall-rotary grip Output 0,5...2,5...4,5V redundant opposite							
Special model								
X	Special / customer-specific							


Edition:
Push button installed
Cross switch installed

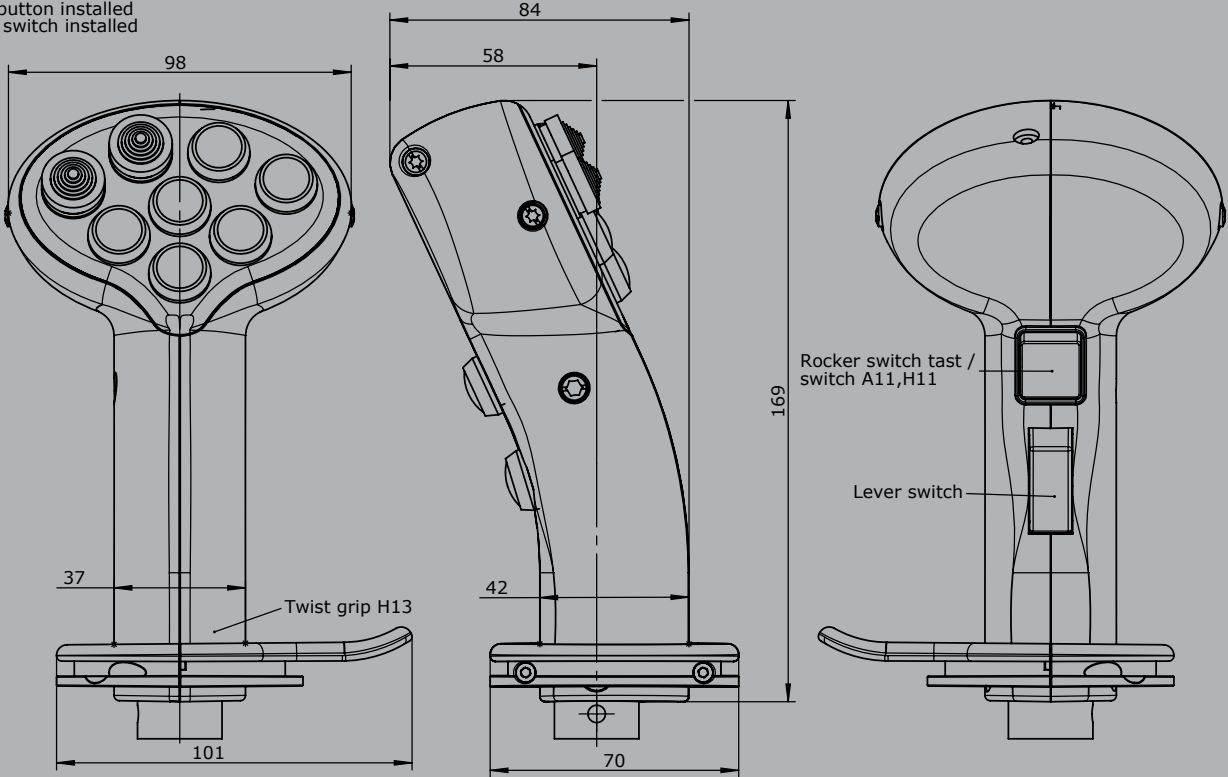

Edition:
Hall rocker switch
Push button

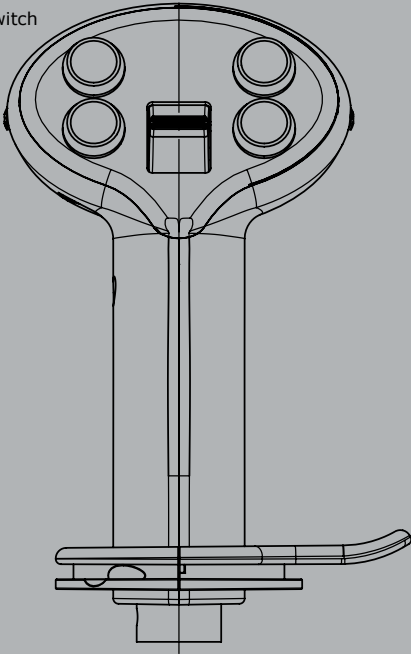

Edition:
Multi-axis controller V21
Potentiometer drive PA9
Push button

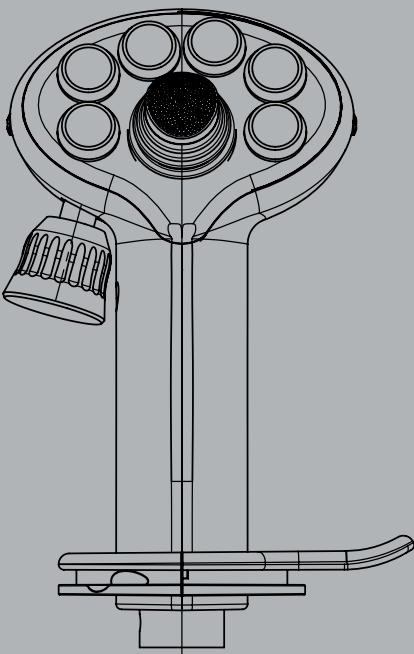

Palm grip B22



The palm grip B22 has different equipment options for many requirements.
It is compatible with our multi-axis controller or mounted on hydraulic drives.
The palm grip has a highly flexible single wire (0,1 qmm, 450 mm long).
The mounting piece for the drive rod can be supplied with a tapped hole 7 mm.

Technical data

Operating temperature	-40°C til +60°C
Degree of protection	IP 65
Contact complement	1,5 24VDC13 (*1 0,1A 24VDC13)




Example


	B22AL	- 4D	W	- X
Basic unit				
B22L	Palm grip left			
B22R	Palm grip right			
B22AL	Palm grip left with support			
B22AR	Palm grip right with support			
Digital actuating element				
D	Push button KDA21 *1			
	Colour: red, black, yellow, green, blue, white, orange			
W*	Rocker switch T-0-T			
W*	Rocker switch 0-T			
W*	Rocker switch R-0-T			
W*	Rocker switch R-0-R			
W*	Rocker switch 0-R			
W*	Rocker switch R-R			
	*Only possible with version with support!			
Special model				
X	Special / customer-specific			

B22

Edition:
Push button installed Pos. 1,2,3,4

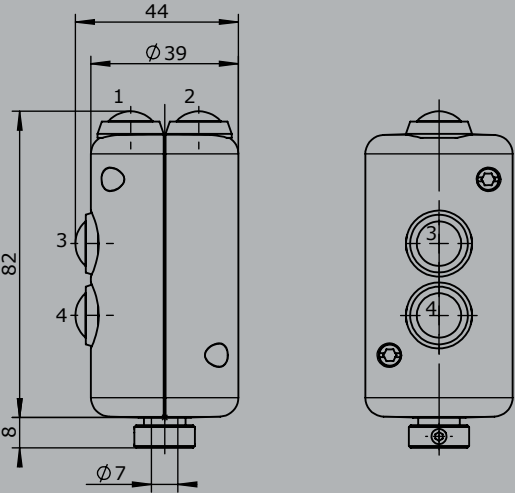


Edition:
Push button installed Pos. 3,4,10

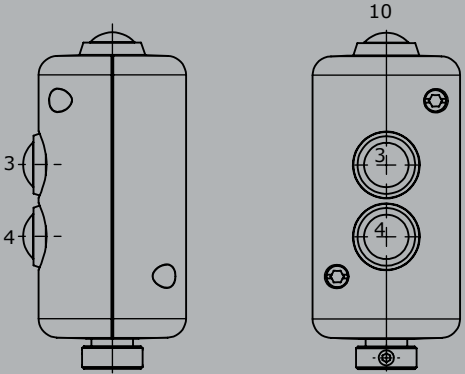


B22A

Edition:
Push button installed Pos. 3,4,5,6,7,8

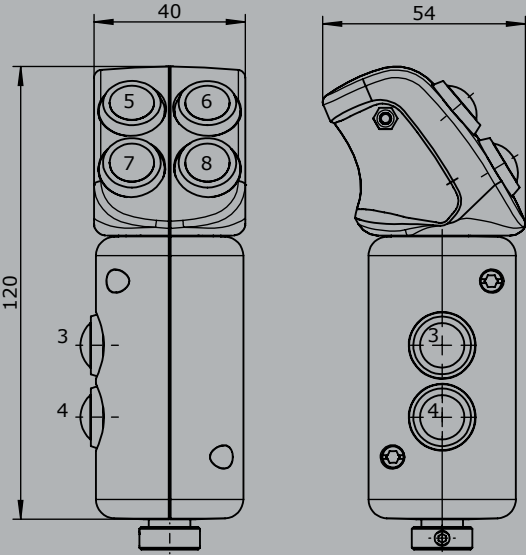

Edition:
Push button installed Pos. 3,4,5,6,9
Rocker switch installed Pos. 7-8

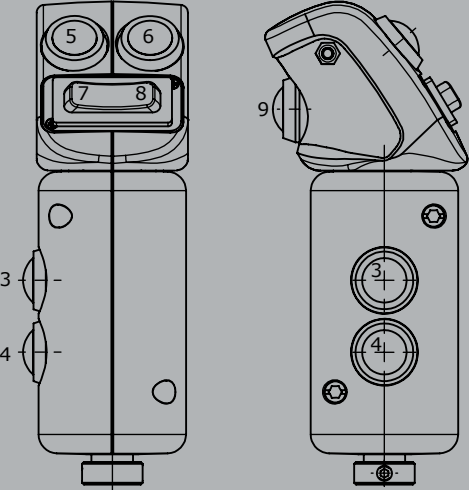

Palm grip B23



The palm grip B23 has different equipment options for many requirements. It is compatible with our multi-axis controller or mounted on hydraulic drives. The palm grip has a highly flexible single wire (0,1 qmm, 450 mm long). The mounting piece for the drive rod can be supplied with a tapped hole 12 mm (standard) or 10 mm.

Technical data

Operating temperature	-40°C til +60°C
Degree of protection	IP 65
Contact complement	1,5A 24VDC13 (*1 0,1A 24VDC13)





2

	B23R	- 2D	W	V21	- X
<i>Example</i>					
Basic unit					
B23L	Palm grip left				
B23R	Palm grip right				
Digital actuating element					
D	Push button KDA21 *1				
	Colour: red, black, yellow, green, blue, white, orange				
W	Rocker switch T-0-T				
W	Rocker switch 0-T				
W	Rocker switch R-0-T				
W	Rocker switch R-0-R				
W	Rocker switch 0-R				
W	Rocker switch R-R				
Analog actuating element					
S9	Hall-Thumb rocker				
	Output 0,5...2,5...4,5V redundant opposite				
V21	Hall-minijoystick				
	Output 0,5...2,5...4,5V redundant opposite				
Special model					
X	Special / customer-specific				


B23R

Push button installed Pos. 1 - 8

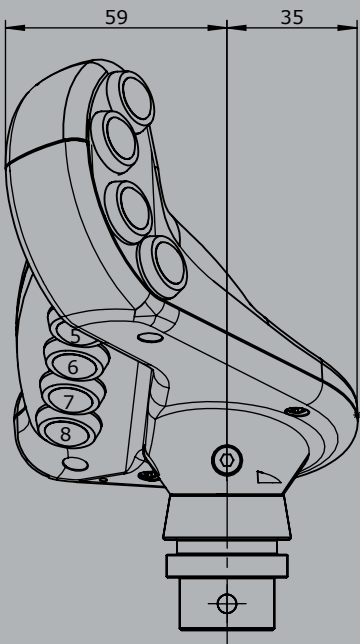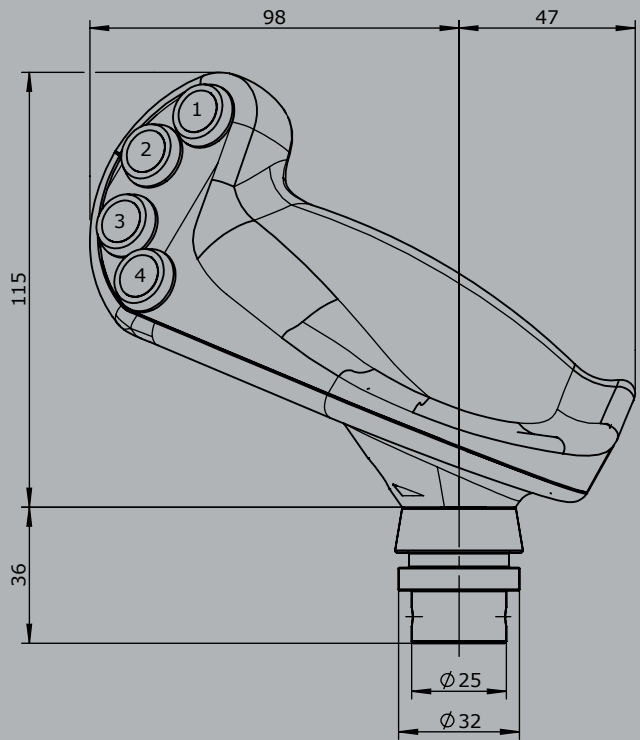


B23L

Push button installed Pos. 1 - 8

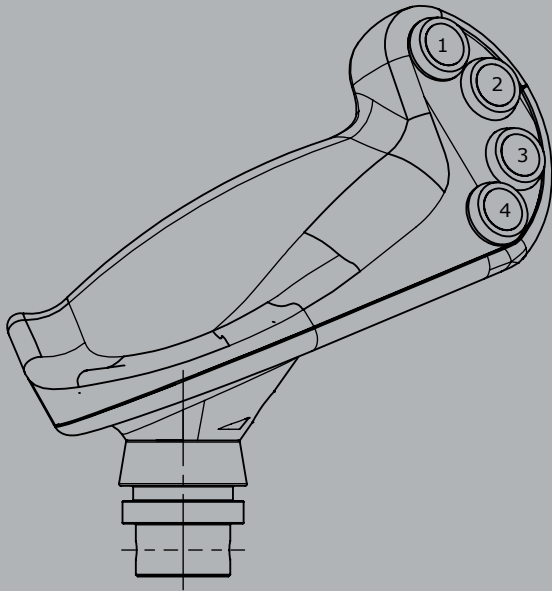

Edition :
Multi-axis controller V21
Push button installed Pos. 5,6,7,8

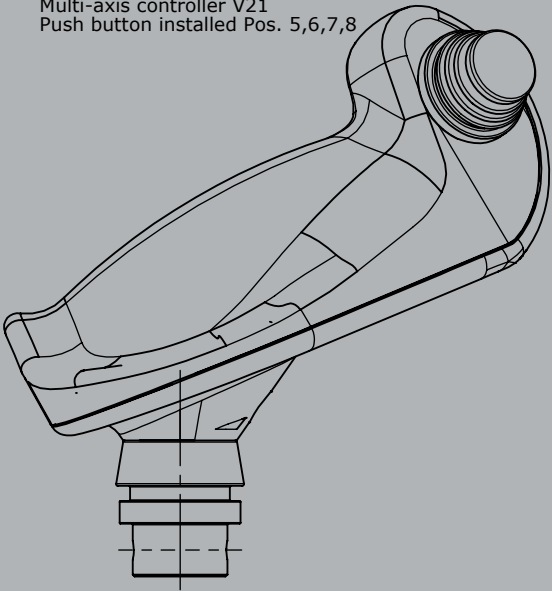

Palm grip B24



The palm grip B24 has different equipment options for many requirements. It is compatible with our multi-axis controller or mounted on hydraulic drives. The superior grip surface is framed by an illuminated colored ring element. The palm grip has a highly flexible single wire (0,1 qmm, 450 mm long). The mounting piece for the drive rod can be supplied with a tapped hole 12 mm (standard) or 10 mm.


Technical data

Operating temperature	-40°C til +60°C
Degree of protection	IP 54
Contact complement	1,5A 24VDC13 (*1 0,1A 24VDC13)




		B24	- D	2W	V21	- IWH	- X
Basic unit							
B24	Palm grip						
Digital actuating element							
D	Push button KDA21 *1						
	Colour: red, black, yellow, green, blue, white, orange						
W	Rocker switch T-0-T						
W	Rocker switch 0-T						
W	Rocker switch R-0-T						
W	Rocker switch R-0-R						
W	Rocker switch 0-R						
W	Rocker switch R-R						
Analog actuating element							
V21	Hall-minijoystick						
	Output 0,5...2,5...4,5V redundant opposite						
H13	Hall-rotary grip						
	Output 0,5...2,5...4,5V redundant opposite						
Additional option							
IWH	Colour ring white, illuminated						
IRD	Colour ring red, illuminated						
IBL	Colour ring blue, illuminated						
WH	Colour ring white						
RD	Colour ring red						
BL	Colour ring blue						
GN	Colour ring green						
YE	Colour ring yellow						
Special model							
X	Special / customer-specific						

Edition :
Push button installed Pos. 1 - 6, 10
Rocker switch / taste installed Pos. 7,(8), 9
() left

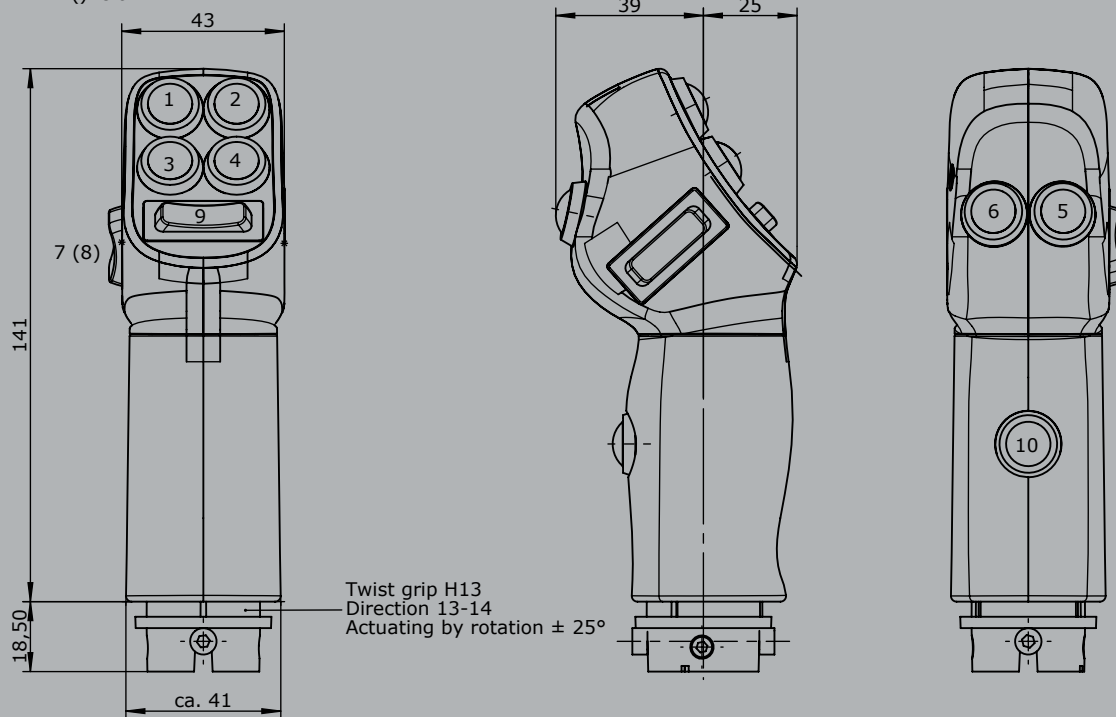

Edition :
Push button installed Pos. 5,6,10
Rocker switch / taste Pos. 7,(8), 9
multi-axis controller V21 Pos. 11
() left

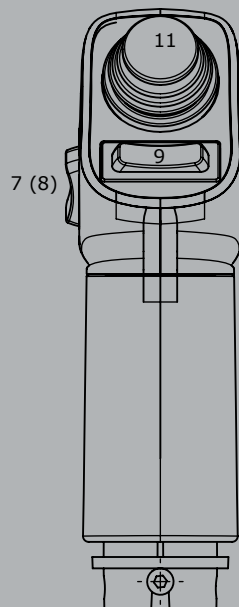

Palm grip B25



The palm grip B25 has different equipment options for many requirements. It is compatible with our multi-axis controller or mounted on hydraulic drives. The palm grip has a highly flexible single wire (0,1 qmm, 450 mm long). The mounting piece for the drive rod can be supplied with a tapped hole 12 mm (standard) or 10 mm.

Technical data

Operating temperature	-40°C til +60°C
Degree of protection	IP 65
Contact complement	1,5A 24VDC 13 (*1 0,1A 24VDC13)



2




		Example							
		B25L	- 2D	W	K	SE	V21	H13	- X
Basic unit									
B25L	Palm grip left								
B25R	Palm grip right								
Digitale actuating element									
D	Push button KDA21 *1								
	Colour: red, black, yellow, green, blue, white, orange								
HD	Hall-push button (see page 125)								
W	Rocker switch T-0-T								
W	Rocker switch 0-T								
W	Rocker switch R-0-T								
W	Rocker switch R-0-R								
W	Rocker switch 0-R								
W	Rocker switch R-R								
K	Lever switch								
SR	Sliding switch R-O-R								
ST	Slide switch T-0-T								
SE	Sensor button capacitiv with external control electronics								
S	Sensor button capacitiv without external control electronics (consistent with V85/VV85 and V25 with interface E4xx+E5xx)								
V	Vibration								
Analog actuating element									
S9	Hall-Thumb rocker								
	Output 0,5...2,5...4,5V redundant opposite								
V21	Hall-minijoystick								
	Output 0,5...2,5...4,5V redundant opposite								
PA13	Rotary grip								
	Potentiometer T375 2x5 kOhm with direction contact								
H13	Hall-rotary grip								
	Output 0,5...2,5...4,5V redundant opposite								
Special model									
X	Special / customer-specific								

B25R

Push button installed Pos. 1 - 11
Lever switch installed Pos. 12




Rocker switch
installed Pos. 9+10 possible

Twist grip PA13,H13
Direction 13-14
Actuating by
rotation $\pm 25^\circ$

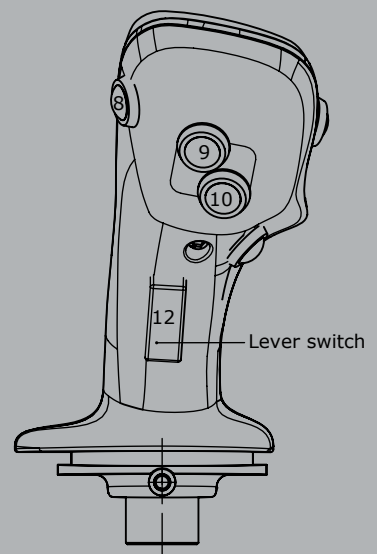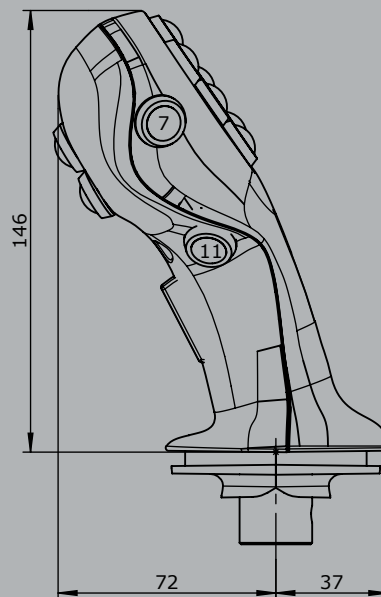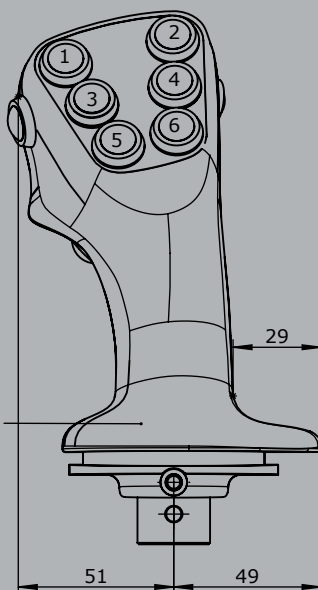


B25L


Push button installed Pos. 1 - 11
Lever switch installed Pos. 12

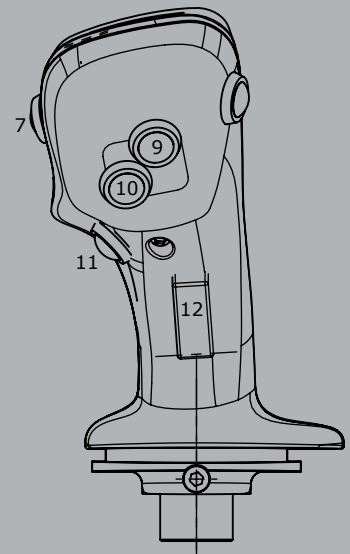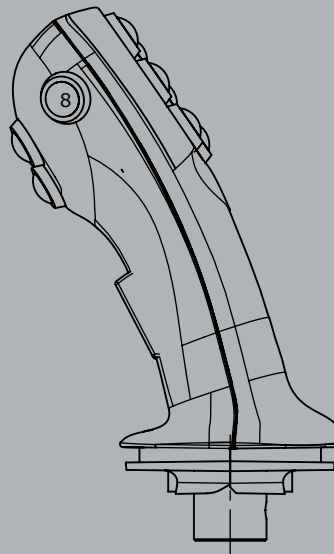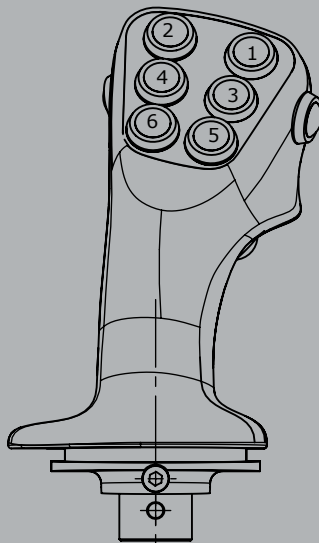


Edition: B25R
installed Pos. 3+1
Rocker switch
installed Pos. 2+4
Rocker switch



Edition: B25R
installed Pos. 3+1
Sliding switch
installed Pos. 2+4
Rocker switch



Edition: B25R
installed Pos. 2+4
Multi-axis controller V21
installed Pos. 5+6
Rocker switch



Palm grip B28



The palm grip B28 has different equipment options for many requirements. It is compatible with our multi-axis and single-axis controller or mounted on hydraulic drives.
The palm grip has a highly flexible single wire (0,1 qmm, 450 mm long).
The mounting piece for the drive rod can be supplied with a tapped hole 10 mm (standard).

Technical data

Operating temperature	-40°C til +60°C
Degree of protection	IP 54




2

		Example			
		B28	- 2D	SE	- X
Basic unit					
B28	Palm grip				
Digital actuating element					
D	Push button (1,5A 24VDC13)				
	Colour: red, black, yellow, green, blue, grey				
SE	Sensor button capacitiv with external control electronics				
S	Sensor button capacitiv without external control electronics				
	(consistent with V85/VV85 and V25 with interface E4xx+E5xx)				
Special model					
X	Special / customer-specific				


Palm grip

B28


Edition:
Push button installed
Pos. 1,3,4,6,7,8
Sensor button function on left or right available

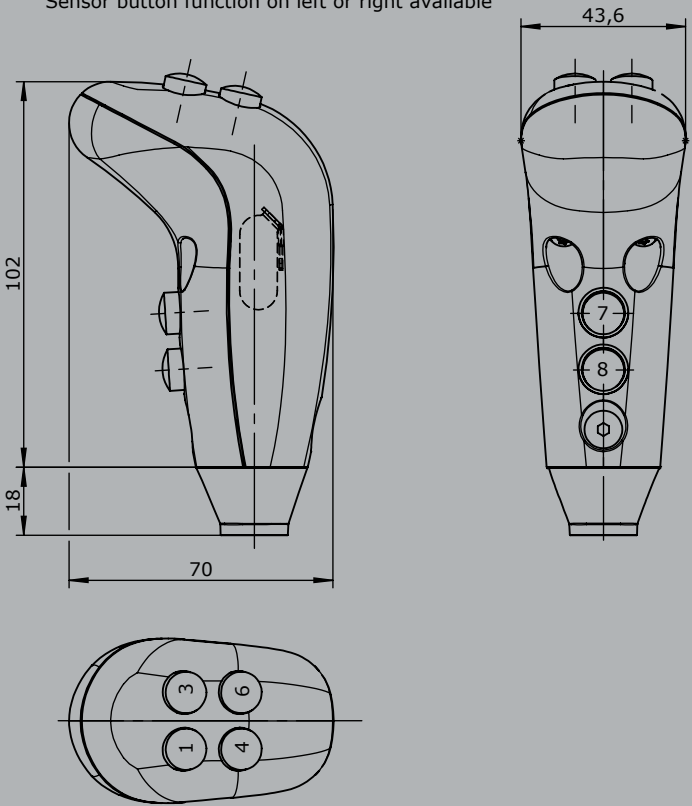

Edition:
Push button installed
Pos. 2,5,7,8
Sensor button function on left or right available



Edition:
Push button installed
Pos. 7,8,9,10
Sensor button function on left or right available

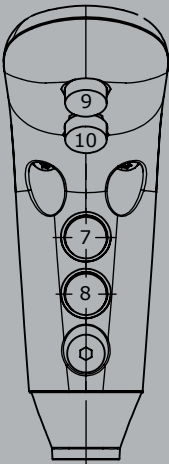

Palm grip B29



The palm grip B29 has different equipment options for many requirements. It is compatible with our multi-axis and single-axis controller or mounted on hydraulic drives.
The palm grip has a highly flexible single wire (0,1 qmm, 450 mm long).
The mounting piece for the drive rod can be supplied with a tapped hole 12 mm (standard) or 10 mm.


Technical data

Operating temperature	-40°C til +60°C
Degree of protection	IP 65
Contact complement	0,1A 24VDC13




		Example		
		B29	- 2D	- X
Basic unit				
B29	Palm grip			
Digital actuating element				
D	Push button KDA21			
	Colour: red, black, yellow, green, blue, white, orange			
SE	Sensor button capacitiv with external control electronics			
S	Sensor button capacitiv without external control electronics			
	(consistent with V85/VV85 and V25 with interface E4xx+E5xx)			
Special model				
X	Special / customer-specific			


B29

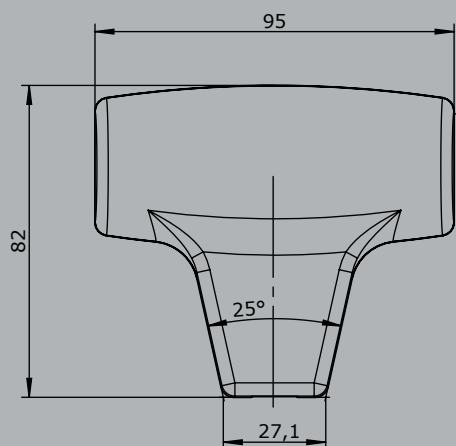


Edition:
Push button installed Pos. 1-6

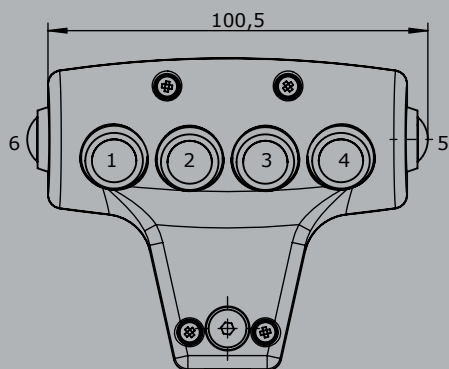

Edition:
Sensor installed Pos. 6,
Push button installed Pos. 3,4

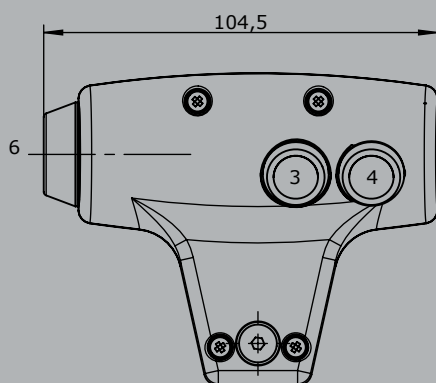

Edition:
Sensor installed Pos. 5,
Push button installed Pos. 1,2

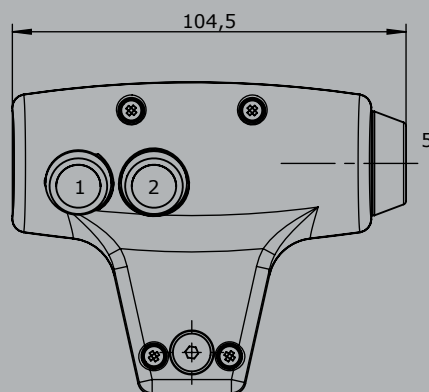

Dimension outside in mm	Dimension inside in mm	Remarks	Weight KG	Form
----------------------------	---------------------------	---------	--------------	------

Steel sheet housing material thickness 1/1,5 mm

Predetection IP 54 painting RAL 7032 pebble-grey textured varnish

200 x 200 x 92	166 x 166 x 90		1,3	B 200
230x 230 x 105	196 x 196 x 102		1,4	B 230
230 x 340 x 105	196 x 306 x 102		1,5	B 230 x 340
230 x 440 x 105	196 x 406 x 102		1,6	B 230 x 440
250 x 250 x 150	216 x 216 x 147		1,6	B 250 x 250
150 x 400 x 105	116 x 366 x 102		3,2	B 150 x 400
150 x 500 x 105	116 x 466 x 102		3,5	B 150 x 500
150 x 600 x 105	116 x 566 x 102		3,8	B 150 x 600
260 x 500 x 105	226 x 466 x 102		3,8	B 260 x 500
260 x 600 x 105	226 x 566 x 102		4,2	B 260 x 600
dimensions special		On enquiry		

Plastic housing polycarbonat

Predetection IP 65 colour RAL 7035 fair-grey

120 x 122 x 105	113 x 115 x 98		0,35	I 120 x 122
120 x 160 x 140	113 x 134 x 133		0,6	I 120 x 160
160 x 240 x 120	153 x 215 x 114		0,8	I 160 x 240
160 x 360 x 100	153 x 352 x 94		1,0	I 160 x 360
230 x 300 x 110	223 x 293 x 103		1,15	I 230 x 300

Plastic housing polyester

Predetection IP 65 colour RAL 7000 grey

220 x 335 x 115	200 x 292 x 108	Colour altern. RAL 9011 black	1,65	I 220 x 335
220 x 465 x 115	200 x 432 x 108	Colour altern. RAL 9011 black	2,24	I 220 x 465
250 x 255 x 120	236 x 243 x 110		2,65	I 250 x 255
250 x 400 x 120	236 x 386 x 110		3,65	I 250 x 400
250 x 600 x 120	236 x 586 x 110		5,24	I 250 x 600

Accessory parts

Hinges each housing (2 pcs.)			0,2	
Armrest with clamp adjustable straps			0,5	
Cable entry M20 cable 7-13 mm	With anti-kink predetection and strain relief		0,15	
Cable entry M32 cable 11-21 mm	With anti-kink predetection and strain relief		0,2	
Cable entry M 40 cable 19-28 mm	With anti-kink predetection and strain relief		0,25	
Pillar with flange 100 x 100 x 535 mm high	Flange 150 x 150 mm		14,0	
Indicating labels not engraved				
Indicating labes with engraving	Character			

Attachment for crane control unit, portable control unit and housing

Command and indicating devices 22mm (Siemens Typ 3SB) incl. indicating label		Contact-complement	Weight KG	Type
Push button		1 S + 1 Ö	0,040	D
Selector switch 0-1	2 positions	1 S + 1 Ö	0,050	W
Selector switch 1-0-2	3 positions	2 S + 2 Ö	0,060	W
Key switch 0-1	2 positions	1 S + 1 Ö	0,130	S
Key switch 1-0-2	3 positions	2 S + 2 Ö	0,140	S
Mushroom key switch latching		1 S + 1 Ö	0,080	PS
Mushroom head push button latching		1 Ö	0,060	PV
Illuminated push button diode 24 VDC/AC		1 S + 1 Ö	0,040	LD
Illuminated push button diode 220 VAC		1 S + 1 Ö	0,040	LD
Indicator light diode 24 VDC/AC			0,040	L
Indicator light diode 220 VAC			0,040	L
Coordinate switch 2 positions horizontal T-O-T 3SB1201-7DV01		2 S	0,102	K
Coordinate switch 2 positions vertical T-O-T 3SB1201-7FV01		2 S	0,102	K
Coordinate switch 4 positions T-O-T / T-O-T 3SB1208-7JV01		4 S	0,112	K
Switching element in addition		1S + 1Ö	0,010	
Other command and indicating devices				
Summer			0,250	
Knee button FAK-S/KC/I		1 S + 1 Ö	0,350	
Foot button		1 S + 1 Ö	0,450	
Attachment				
Drilling 22 mm				
Blind plug 22 mm				
Cutouts for display devices				
Microphone with gooseneck				
Power supply 230V/24VDC for driver seat				

Crane control unit
KST 4 swiveling



The KST 4 is an ergonomically designed swiveling crane control chair which provides a high degree of comfort.

Equipment boxes:

The sheet steel equipment boxes are vertically and horizontally adjusted. The arrangement of the joysticks, indicators and control devices is customised according to customer specifications. Cabling is run through aduct in the cross-member. (Terminal block) Special boxes available upon request.

Driver seat:

As standard the KST 4 is fitted with a KFS 11 seat. The seat itself is fitted with a hydraulic vibration absorption system complete with weight adjustment to ensure that the comfort level is fitted with armrests and a headrest. There is the option to have the seat covered with air-permeable artificial leather.

Cross-member with swivel base:

The cover of the sheet steel cross-member including the driver's seat is forward foldable. Thereby all wirings, terminals and bushings are easily accessible during commissioning and maintenance. Swivel base has zero-clearance bearing and can be locked by a friction brake.

Surface treatment:

Base coat and textured varnish
Standard colour RAL 9011 black



		Example														
		KST 41	- 3	- M1	- F1	- LK	/	KFS 11	/	V64	/	V64.1	/	KL	/	X
Basic unit																
KST 41	With equipment boxes 160x420 mm															
KST 42	With equipment boxes 200x420 mm															
Base unit																
1	Swiveling 180° left, 90° right with friction brake															
2	Electric swiveling 180° left, 90° right															
3	Not swiveling															
4	Without base frame															
Attachment																
M1	Monitor mounting with monitor housing															
M2	Monitor mounting with monitor mounting braket															
M3	Monitor mounting without monitor housing/ -mounting braket															
F1	Footrest mounted dispatch 1 KBF/433															
H	Heater 2x2 kW with ventilator															
LK	Plate for horizontal manual adjustment of crane control unites +/- 250 mm															
Driver seat																
KFS 11* (included in the delivery!)																
KFS 9*																
KFS 10*																
KFS 12*																
*Description see driver seat page 186																

Technical details may vary based on configuration or application! Technical data subject to change without notice!

Crane control unit

KST 4 swiveling



KST 41 - 3 - M1 - F1 - LK / KFS 11 / V64 / V64.1 / KL / X

Mountig for equipment boxes

- V... Multi-axis controller (*see page 1*)
- S... Single-axis controller (*see page 65*)
- D... Double-handle controller (*see page 45*)
- N... Control-switch (*see page 101*)
- ... *More command and indicating devices (see page 162)*


Wiring

KL	Without wiring, each terminal block built in each terminal
KLV	On terminal block 4 qmm with single wire 1 qmm each terminal
KLV	On SPS (SPS provision) with single wire 1 qmm each terminal
KLVA	External wiring single wire highly flexible 1,5 qmm 5 m long, each terminal


Special model

X	Special / customer-specific
X ¹	Special painted



Crane control unit KST 4 swiveling

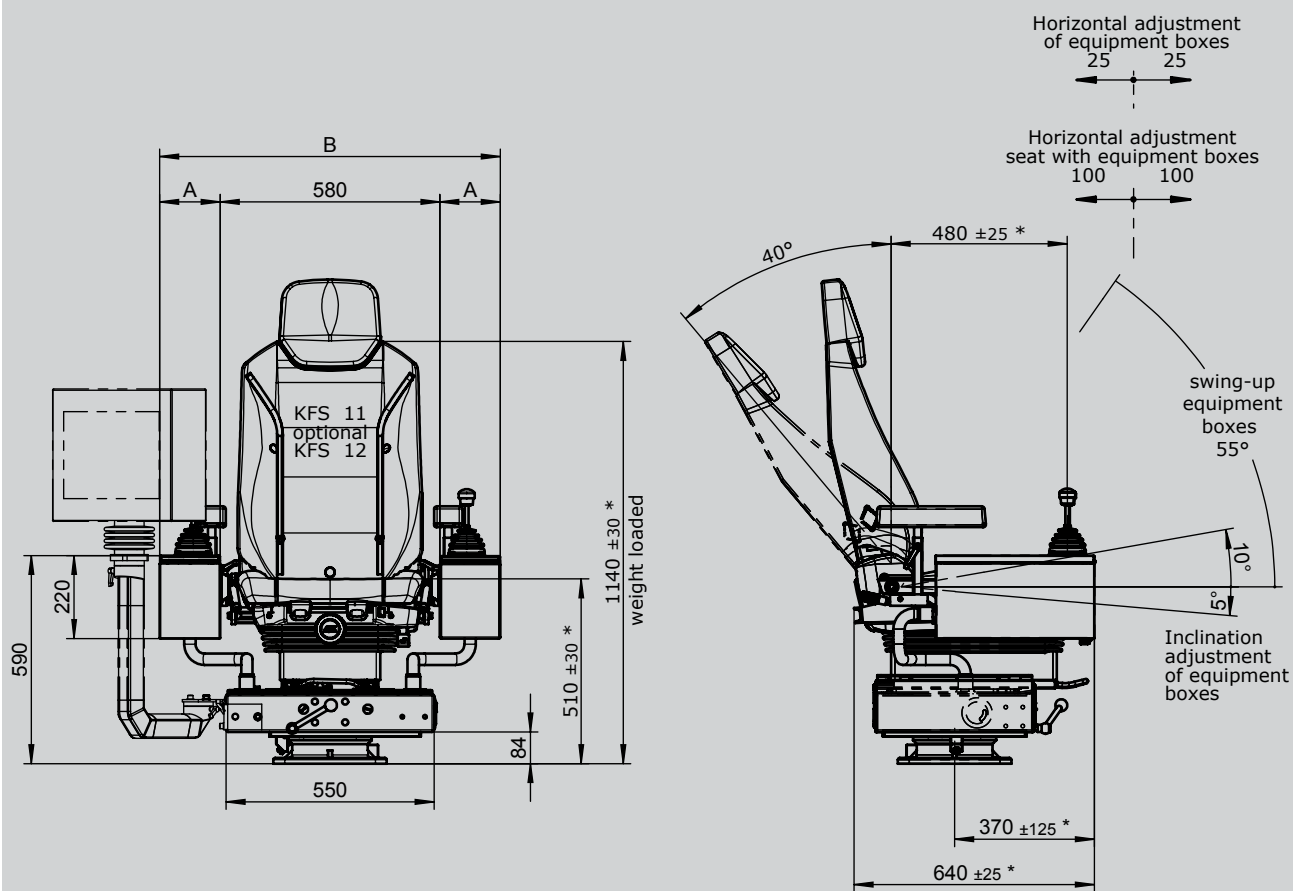

with heating



Floor mounting

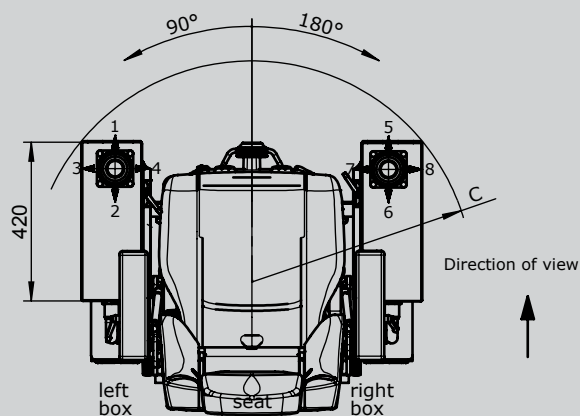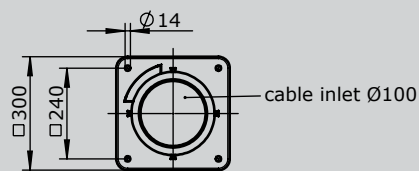

* adjustable

Type	Dim. A	Dim. B	Dim. C
KST 41	160	900	max. 670 min. 570
KST 42	200	980	max. 700 min. 600

Crane control unit

KST 5 swiveling



The KST 5 is an ergonomically designed swiveling crane control chair which provides a high degree of comfort.

Equipment boxes:
The equipment boxes are made from sheet steel and as standard have a hinged lid with locking feature. This allows for easy inspection and maintenance. The side of the equipment boxes is as standard fitted with an inspection plate which again is lockable. The arrangement of the joystick, indicators and control devices is customised according to customer specifications. This combined with the custom sized and profiled equipment boxes that are available means that the KST 5 is very flexible and customisable solution.

Driver seat:
As standard the KST 5 is fitted with a KFS 11 seat. The seat itself is fitted with a hydraulic vibration absorption system complete with weight adjustment to ensure that the comfort level is fitted with armrests and a headrest. There is the option to have the seat covered with air-permeable artificial leather.

Cross-member with swivel base:
The cover of the sheet steel cross-member including the driver's seat is forward foldable. Thereby all wirings, terminals and bushings are easily accessible during commissioning and maintenance. Swivel base has zero-clearance bearing and can be locked by a friction brake.

Surface treatment:
Base coat and textured varnish
Standard colour RAL 9011 black



Example										
	KST 51	- 3	- M1	- F1	- LK	/	KFS 11	/	V64	/ V64.1 / KL / X
Basic unit										
KST 51	With equipment boxes 200x580 mm									
KST 52	With equipment boxes 270x580 mm									
KST 54	With equipment boxes 320x580 mm									
<i>Special boxes for demand!</i>										
Base unit										
1	Swiveling 180° left, 90° right with friction brake									
2	Electric swiveling 180° left, 90° right									
3	Not swiveling									
Attachment										
M1	Monitor mounting with monitor housing									
M2	Monitor mounting with monitor mounting braket									
M3	Monitor mounting without Monitor housing/-mounting braket									
F1	Footrest KBF/433									
H	Heater 2x2 kW with ventilator 240V AC									
LS	Plate for horizontal manual adjustment for control units +/- 75 mm									
LK	Plate for horizontal manual adjustment for control units +/- 250 mm									
Label without engraving for multi-axis-/ single-axis controller										
Label with engraving for multi-axis-/ single-axis controller										

Technical details may vary based on configuration or application! Technical data subject to change without notice!

Crane control unit

KST 5 swiveling

KST 51 - 3 - M1 - F1 - LK / KFS 11 / V64 / V64.1 / KL / X

Driver seat

KFS 11* *(included in the delivery!)*

KFS 9*

KFS 10*

KFS 12*

**Description see driver seat page 186*

Mounting for equipment boxes

V... Multi-axis controller *(see page 1)*

S... Single-axis controller *(see page 65)*

D... Double-handle controller *(see page 45)*

N... Control-switch *(see page 101)*

... *More command and indicating devices (see page 162)*

Wiring

KL Without, but terminal block built each terminal

KLv On terminal block 4 qmm with single wire 1 qmm each terminal

KLv On SPS (SPS provision) with single wire 1 qmm each terminal


KLVA External wiring single wire highly flexible 1,5 qmm 5 m long, each terminal

Special model


X Special / customer-specific

X1 Special painted



Crane control unit KST 5 swiveling

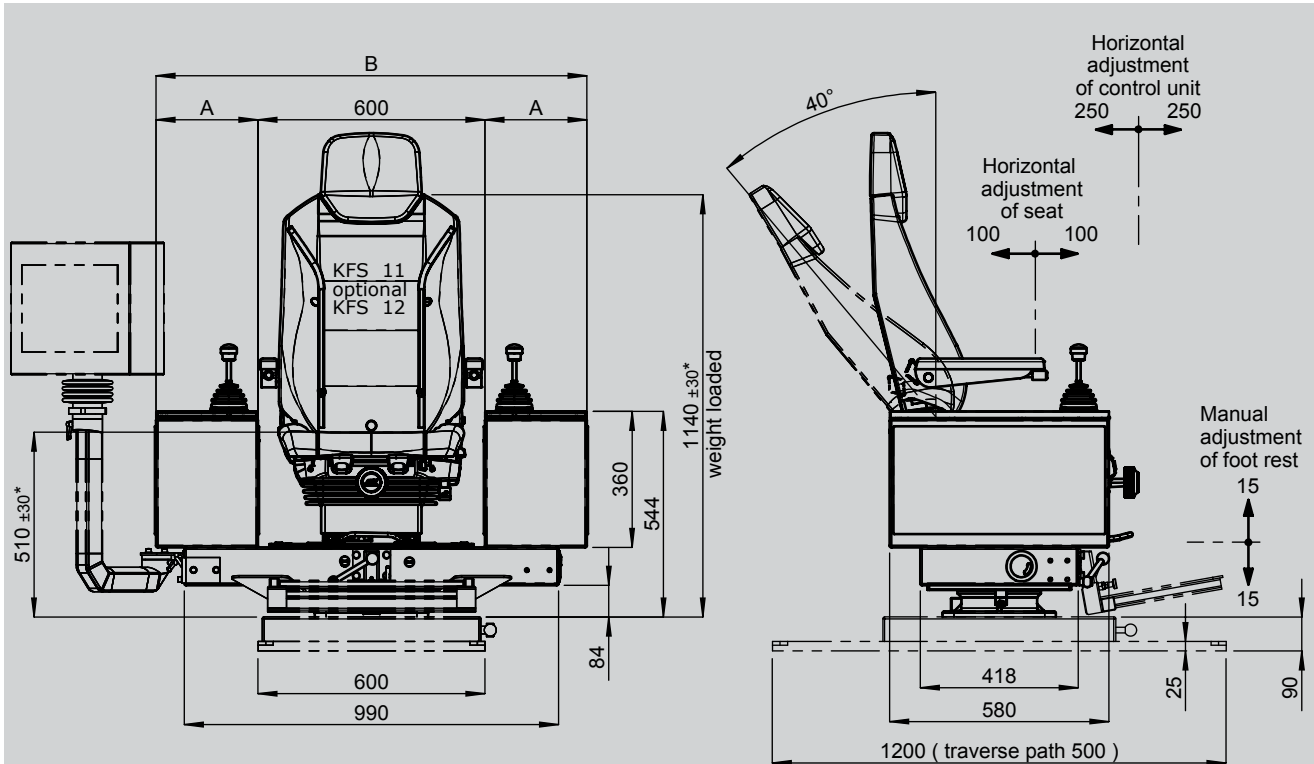

Floor mounting

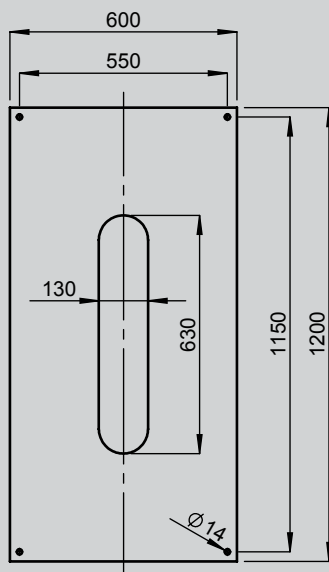

Floor mounting

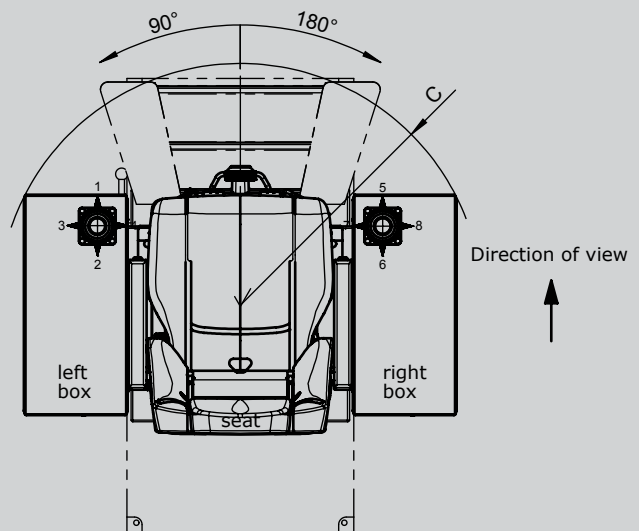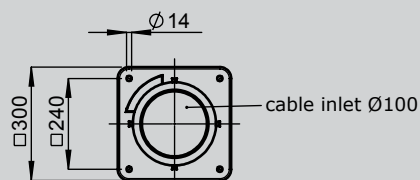

* adjustable

Type	Dim. A	Dim. B	Dim. C
KST 51	200	1000	580
KST 52	270	1140	640
KST 54	320	1240	690

Crane control unit

KST 6 swiveling



The KST 6 is an ergonomically designed swiveling crane control chair which provides a high degree of comfort.

Equipment boxes:
The sheet steel equipment boxes are vertically and horizontally adjusted. The arrangement of the joysticks, indicators and control devices is customised according to customer specifications. Cabling is run through adcut in the cross-member. (Terminal block)

Driver seat:
As standard the KST 6 is fitted with a KFS 11 seat. The seat itself is fitted with a hydraulic vibration absorption system complete with weight adjustment to ensure that the comfort level is fitted with armrests and a headrest. There is the option to have the seat covered with air-permeable artificial leather.

Cross-member with swivel base:
The cover of the sheet steel cross-member including the driver's seat is forward foldable. Thereby all wirings, terminals and bushings are easily accessible during commissioning and maintenance. Swivel base has zero-clearance bearing and can be locked by a friction brake.

Surface treatment:
Base coat and textured varnish
Standard colour RAL 9011 black



		Example														
		KST 6	- 3	- M1	- F1	- LK	/	KFS 11	/	V64	/	V64.1	/	KL	/	X
3	Basic unit															
	KST 6 With equipment boxes															
3	Base unit															
	1 Swiveling 180° left, 90° right with friction brake															
	2 Electric swiveling 180° left, 90° right															
	3 Not swiveling															
	4 Without base frame															
3	Attachment															
	M1 Monitor mounting with monitor housing															
	M2 Monitor mounting with monitor mounting bracket															
	M3 Monitor mounting without monitor housing/-mounting bracket															
	F1 Footrest KBF/433															
	H Heater 2x2 kW with ventilator															
	LK Plate for horizontal manual adjustment for control unites +/- 250 mm															
3	Driver seat															
	KFS 11* (included in the delivery!)															
	KFS 9*															
	KFS 10*															
	KFS 12*															
*Description see driver seat page 186																

Technical details may vary based on configuration or application! Technical data subject to change without notice!


Crane control unit

KST 6 swiveling

KST 6 - 3 - M1 - F1 - LK / KFS 11 / V64 / V64.1 / KL / X

Mounting for equipment boxes	
V...	Multi-axis controller (see page 1)
S...	Single-axis controller (see page 65)
D...	Double-handle controller (see page 45)
N...	Control-switch (see page 101)
...	More command and indicating devices (see page 162)
Wiring	
KL	Without, but terminal block built each terminal
KLV	On terminal block 4 qmm with single wire 1 qmm each terminal
KLVA	On SPS (SPS provision) with single wire 1 qmm each terminal
KLVA	External wiring single wire highly flexible 1,5 qmm 5 m long each terminal
Special model	
X	Special / customer-specific
X ¹	Special painted

Crane control unit KST 6 swiveling

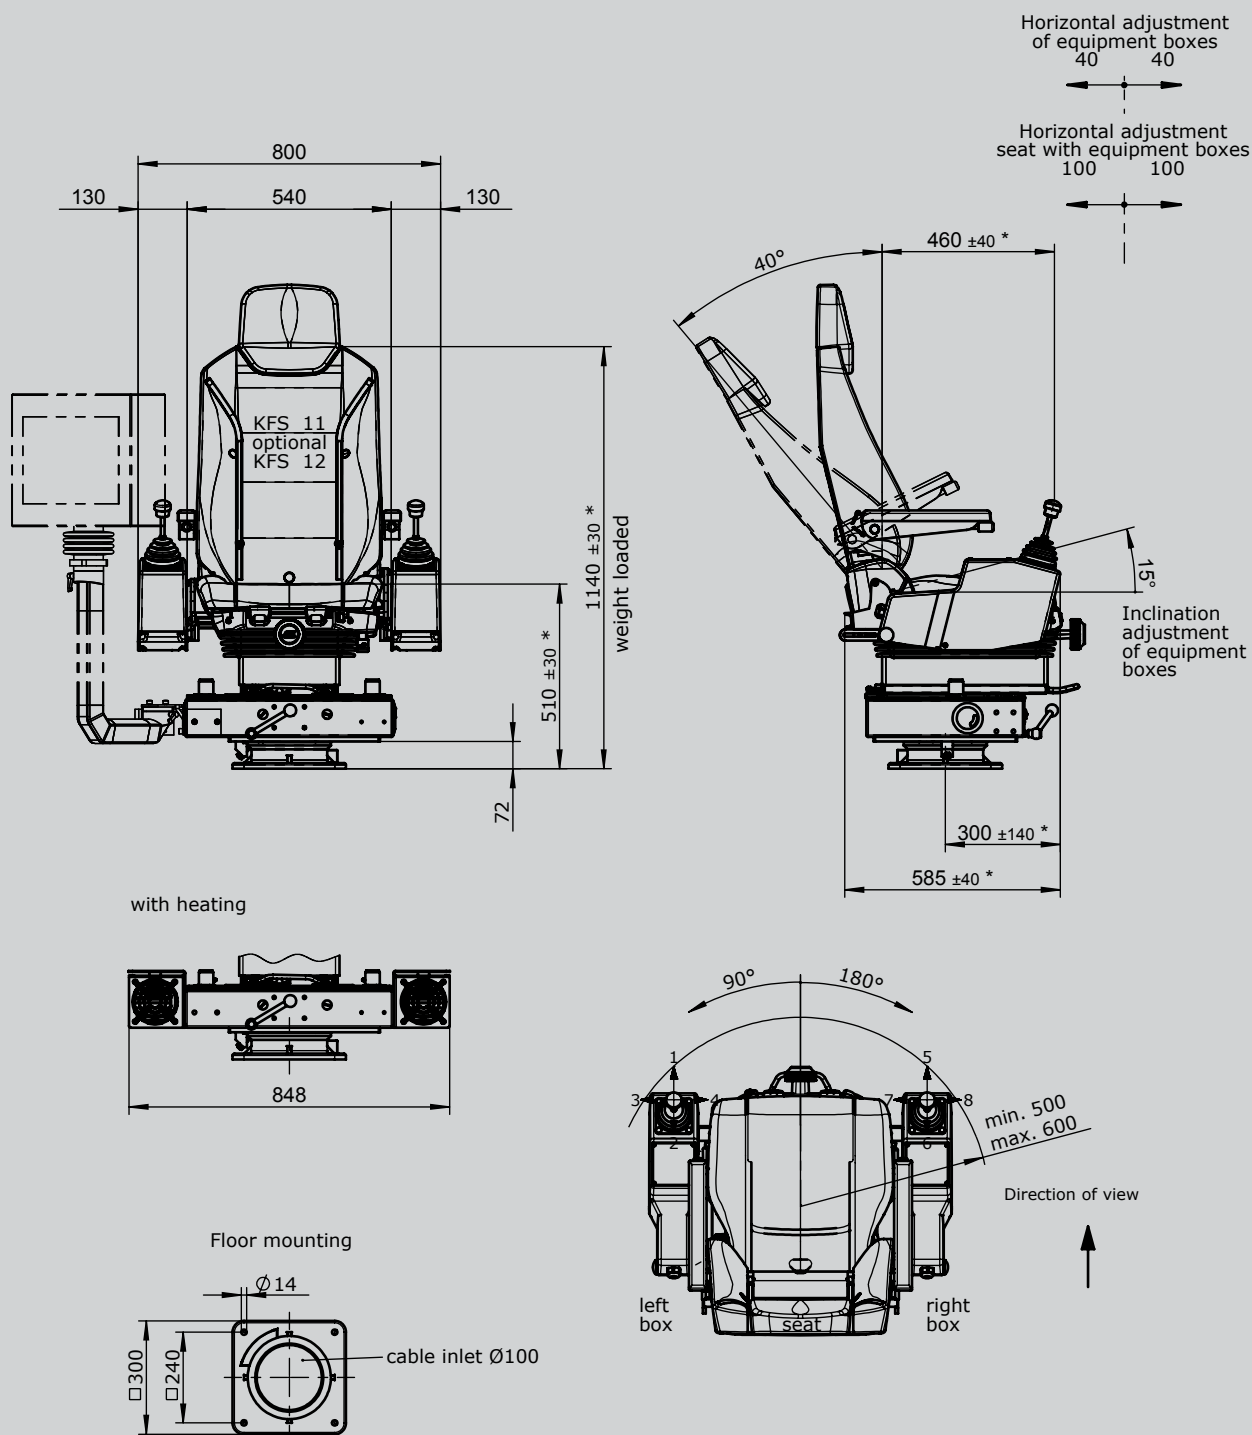

* adjustable

Crane control unit

KST 7



The KST 7 is an ergonomically designed swiveling crane control chair which provides a high degree of comfort.

Equipment boxes:
The equipment boxes are made from sheet steel and as standard have a hinged lid with locking feature. This allows for easy inspection and maintenance. The side of the equipment boxes is as standard fitted with an inspection plate which again is lockable. The arrangement of the joystick, indicators and control devices is customised according to customer specifications. This combined with the custom sized and pro-filed equipment boxes that are available means that the KST 7 is very flexible and customisable solution.

Driver seat:
The tipped spring mounted seat KFS 4 is fit with an hydraulic vibration absorption system incl. weight adjustment. With the folding spring mounted seat you can also arrive your workplace in small cabins.

Base plate:
The cran control unit is available with or without base plate.

Surface treatment:
base coat and textured varnish
Standard colour RAL 7032 pebble-grey




		Example											
		KST 7	- 1	/	KFS 11	/	V64	/	V64.1	/	KL	/	X
Basic unit													
KST 7	with equipment boxes 290x500 mm												
KST 75	with equipment boxes 210x500 mm												
Special boxes for demand!													
Base plate													
1	With base plate prepare for driver seat KFS 4												
2	With base plate prepare for driver seat KFS 2												
3	With base plate with apron for driver seat KFS 9, KFS 11...												
4	Without base plate												
Driver seat													
KFS 4*	(included in the delivery!)												
KFS 2*													
KFS 11*													
KFS 9*													
*Description see driver seat page 186													
Mounting for equipment boxes													
V...	Multi-axis controller (see page 1)												
S...	Single-axis controller (see page 65)												
D...	Double-handle controller (see page 45)												
N...	Control-switch (see page 101)												
...	More command and indicating devices (see page 162)												

Technical details may vary based on configuration or application! Technical data subject to change without notice!

KST 7 - 1 - M1 - F1 - LK / KFS 11 / V64 / V64.1 / KL / X

Wiring	
KL	Without wiring, but terminal block built each terminal
KL V	On terminal block 4 qmm with single wire 1 qmm each terminal
KL V	On SPS (SPS provision) with single wire 1 qmm each terminal
KLVA	External wiring single wire highly flexible 1,5 qmm 5 m long each terminal
Special model	
X	Special / customer-specific
X ¹	Special painted

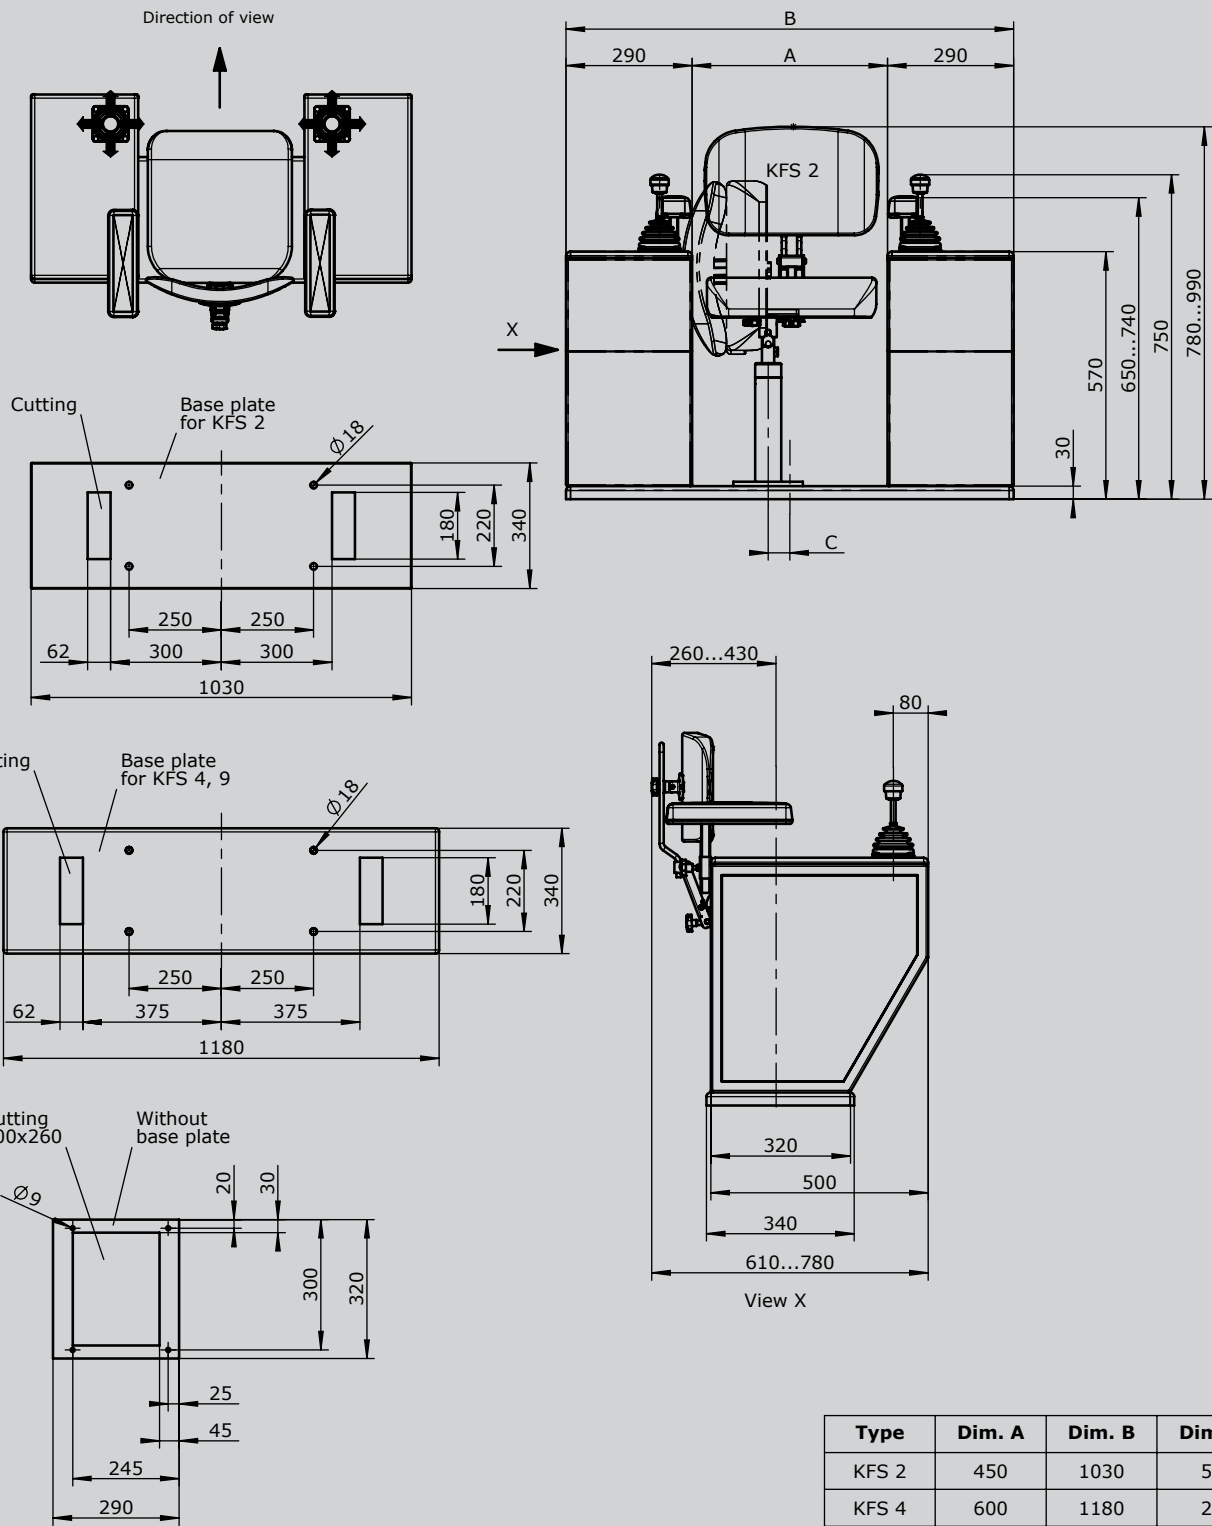

Type	Dim. A	Dim. B	Dim. C
KFS 2	450	1030	50
KFS 4	600	1180	25
KFS 9	600	1180	25

Crane control unit
KST 8 swiveling



The KST 8 is an ergonomically designed swiveling crane control chair which provides a high degree of comfort.

Equipment boxes:

The sheet steel equipment boxes are vertically and horizontally adjusted. The arrangement of the joysticks, indicators and control devices is customised according to customer specifications. Cabling is run through aduct in the cross-member. (Terminal block) Special boxes available upon request.

Driver seat:

As standard the KST 8 is fitted with a KFS 11 seat. The seat itself is fitted with a hydraulic vibration absorption system complete with weight adjustment to ensure that the comfort level is fitted with armrests and a headrest. There is the option to have the seat covered with air-permeable artificial leather.

Cross member with swivel base:

The cover of the sheet steel cross-member including the driver's seat is forward foldable. Thereby all wirings, terminals and bushings are easily accessible during commissioning and maintenance. Swivel base has zero-clearance bearing and can be locked by a friction brake.

Surface treatment:

Base coat and textured varnish
Standard colour RAL 9011 black



Example

	KST 8	- 3	- M1	- F1	- LK	/	KFS 11	/	V64	/	V64.1	/	KL	/	X
Basic unit															
KST 8	With equipment boxes														
Base unit															
1	Swiveling 180° left, 90° right with friction brake														
2	Electric swiveling 180° left, 90° right														
3	Not swiveling														
4	Without base frame														
Attachment															
M1	Monitor mounting with monitor housing														
M2	Monitor mounting with monitor mounting bracket														
M3	Monitor mounting without monitor housing/-mounting bracket														
F1	Footrest KBF/433														
H	Heater 2x2kW with ventilator														
LK	Plate for horizontal manual adjustment of control units +/- 250 mm														
Driver seat															
KFS 11*	(included in the delivery!)														
KFS 9*															
KFS 10*															
KFS 12*															
*Description see driver seat page 186															

Technical details may vary based on configuration or application! Technical data subject to change without notice!

Crane control unit

KST 8 swiveling

KST 8 - 3 - M1 - F1 - LK / KFS 11 / V64 / V64.1 / KL / X

Mounting for equipment boxes

- V... Multi-axis controller (*see page 1*)
- S... Single-axis controller (*see page 65*)
- D... Double-handle controller (*see page 45*)
- N... Control-switch (*see page 101*)
- ... More command and indicating devices (*see page 162*)


Wiring

- KL Without wiring, but terminal block built each terminal
- KLV On terminal block 4 qmm with single wire 1 qmm each terminal
- KLV On SPS (SPS provision) with single wire 1 qmm each terminal
- KLVA External wiring single wire highly flexible 1,5 qmm 5 m long each terminal

Special model

- X Special / customer-specific
- X¹ Special painted

Crane control unit KST 8 swiveling

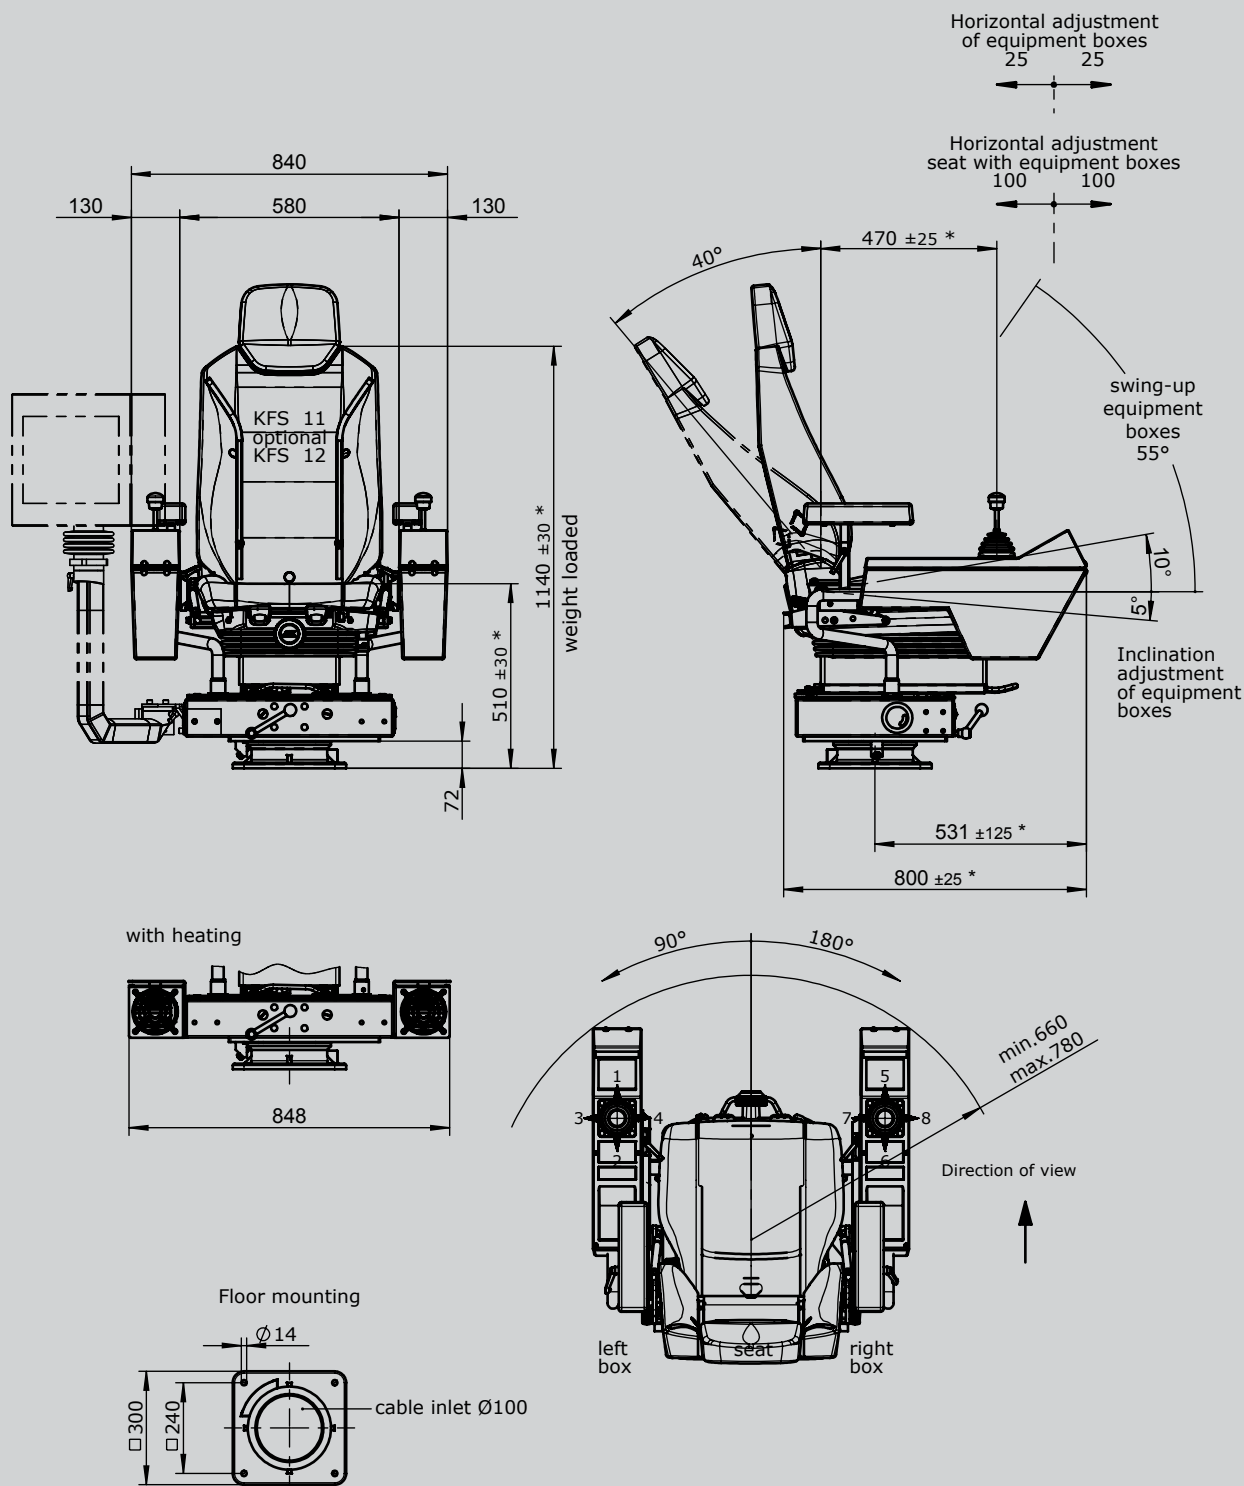

* adjustable

Crane control unit

KST 85



The KST 85 is an ergonomically designed swiveling crane control chair which provides a high degree of comfort.

Equipment boxes:

The sheet steel equipment boxes are vertically and horizontally adjusted. The arrangement of the joysticks, indicators and control devices is customised according to customer specifications. Cabling is run through aduct in the cross-member. (Terminal block)
Special boxes available upon request.

Driver seat:

The comfortable spring mounted seat KFS 85 with roller-bearing swivel systems.

Heating console:





Cover with 2 steps heating (2x2 kW 400V AC) with integrated ventilator. The cover of the heating cover can be tilted forward to reach the terminal block of the heating and cable execution.

Surface treatment:

Base coat and textured varnish
Standard colour RAL 9011 black



		Example											
		KST 85	- M1	/	KFS 82	/	V64	/	V64.1	/	KL	/	X
Basic unit													
KST 85	With heating in the apron												
KST 87	With apron without heating												
Attachment													
M1	Monitor mounting with monitor housing												
M2	Monitor mounting with monitor mounting braket												
M3	Monitor mounting without monitor housing/-mounting braket												
Driver seat													
KFS 82* <i>(included in the delivery!)</i>													
Mounting for equipment boxes													
V...	Multi-axis controller <i>(see page 1)</i>												
S...	Single-axis controller <i>(see page 65)</i>												
D...	Double-handle controller <i>(see page 45)</i>												
N...	Control-switch <i>(see page 101)</i>												
....	<i>More command and indicating devices (see page 162)</i>												
Wiring													
KL	Without wiring, but with terminal block built each terminal												
KLK	On terminal block 4 qmm with single wire 1 qmm each terminal												
KLK	On SPS (SPS provision) with single wire 1 qmm each terminal												
KLVA	External wiring single wire highly flexible 1,5 mm 5 m long each terminal												
Special model													
X	Special / customer-specific												
X'	Special painted												

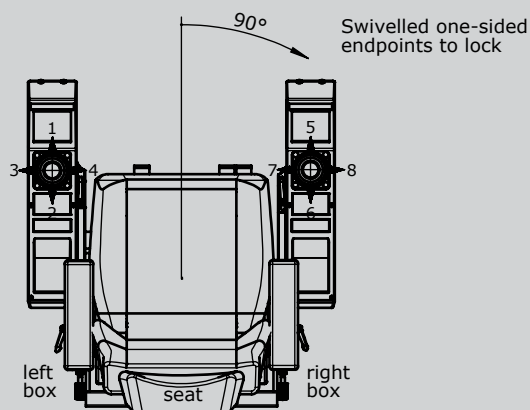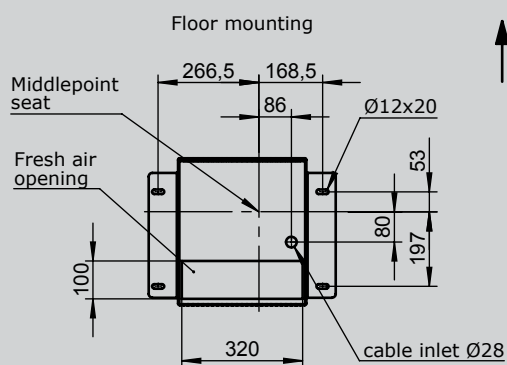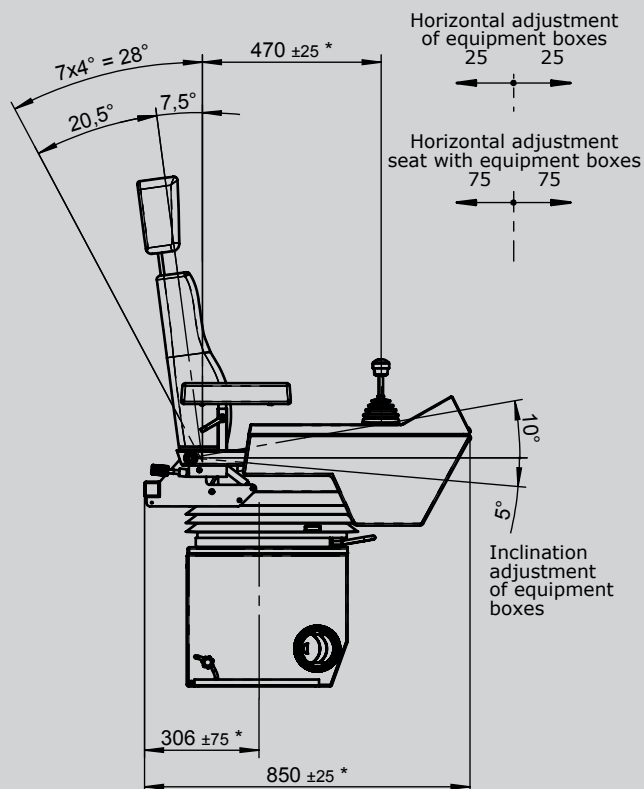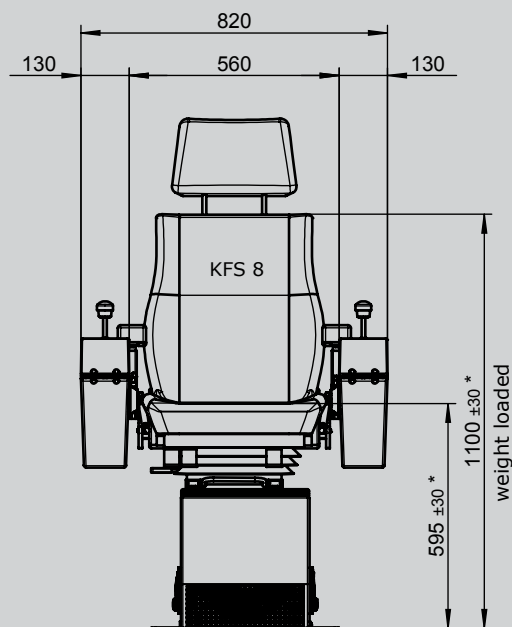

* adjustable

Crane control unit

KST 10 swiveling



The KST 10 is an ergonomically designed swiveling crane control chair which provides a high degree of comfort.

Equipment boxes:

The sheet steel equipment boxes are vertically and horizontally adjusted. The arrangement of the joysticks, indicators and control devices is customised according to customer specifications. Cabling is run through aduct in the cross-member. (Terminal block) Special boxes available upon request.

Driver seat:

As standard the KST 10 is fitted with a KFS 11 seat. The seat itself is fitted with a hydraulic vibration absorption system complete with weight adjustment to ensure that the comfort level is fitted with armrests and a headrest. There is the option to have the seat covered with air-permeable artificial leather.

Cross-member with swivel base:

The cover of the sheet steel cross-member including the driver's seat is forward foldable. Thereby all wirings, terminals and bushings are easily accessible during commissioning and maintenance. Swivel base has zero-clearance bearing and can be locked by a friction brake.

Surface treatment:

Base coat and textured varnish
Standard colour RAL 9011 black



		Example														
		KST 10	- 3	- M1	- F1	- LK	/	KFS 11	/	V85	/	V85.1	/	KL	/	X
Basic unit																
KST 10	With equipment boxes															
Base unit																
1	Swiveling 180° left, 90° right with friction brake															
2	Electric swiveling 180° left, 90° right															
3	Not swiveling															
4	Without base frame															
Attachment																
M1	Monitor mounting with monitor housing															
M2	Monitor mounting with monitor mounting braket															
M3	Monitor mounting without monitor housing/-mounting braket															
F1	Footrest KBF/433															
H	Heater 2x2 kW with ventilator															
LK	Plate for horizontal manual adjustment of control units +/- 250 mm															
Driver seat																
KFS 11* (included in the delivery!)																
KFS 9*																
KFS 10*																
KFS 12*																
*Description see driver seat page 186																

Crane control unit

KST 10 swiveling

KST 10 - 3 - M1 - F1 - LK / KFS 11 / V64 / V64.1 / KL / X

Mounting for equipment boxes

- V... Multi-axis controller (see page 1)
- S... Single-axis controller (see page 65)
- D... Double-handle controller (see page 45)
- N... Control-switch (see page 101)
- ... More command and indicating devices (see page 162)


Wiring

- KL Without wiring, but terminal block built in each terminal
- KL V On terminal block 4 qmm with single wire 1 qmm each terminal
- KL V On SPS (SPS provision) with single wire 1 qmm each terminal
- KLVA External wiring single wire highly flexible 1,5 qmm 5 m long each terminal

Special model

- X Special / customer-specific
- X¹ Special painted

Crane control unit KST 10 swiveling

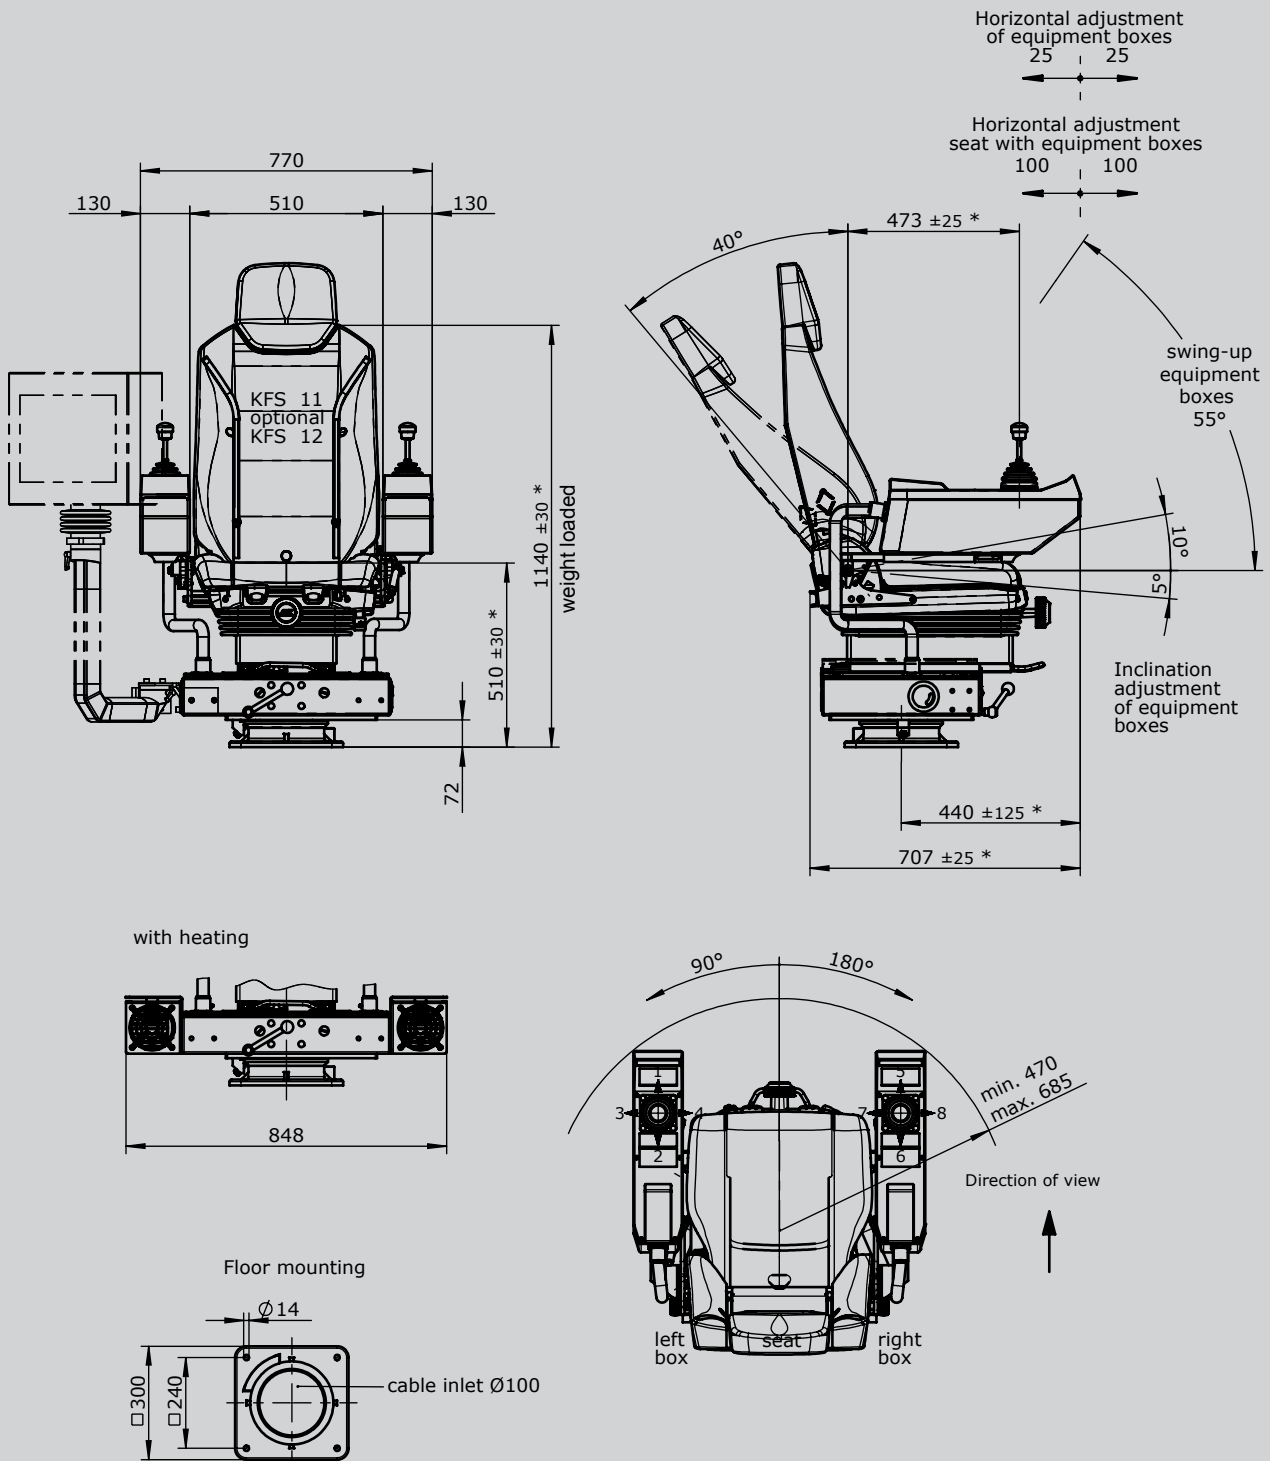

* adjustable

Crane control unit
KST 19 swiveling



The KST 19 is an ergonomically designed swiveling crane control chair which provides a high degree of comfort.

Equipment boxes:

The sheet steel equipment boxes are vertically and horizontally adjusted. The arrangement of the joysticks, indicators and control devices is customised according to customer specifications. Cabling is run through aduct in the cross-member. (Terminal block) Special boxes available upon request.

Driver seat:

As standard the KST 19 is fitted with a KFS 10 seat. The seat itself is fitted with a pneumatic vibration absorption system complete with weight adjustment to ensure that the comfort level is fitted with arm-rests and a headrest. There is the option to have the seat covered with air-permeable artificial leather.

Cross-member with swivel base:

The cover of the sheet steel cross-member including the driver's seat is forward foldable. Thereby all wirings, terminals and bushings are easily accessible during commissioning and maintenance. Swivel base has zero-clearance bearing and can be locked by a friction brake.

Surface treatment:

Base coat and textured varnish
Standard colour RAL 7000 squirrel grey



Example

	KST 19	- 3	- M1	- F1	- LK	/	KFS 10	/	V64	/	V64.1	/	KL	/	X
Basic unit															
KST 19 With equipment boxes															
Base unit															
1 Swiveling 180° left, 90° right with friction brake															
2 Not swiveling															
3 Without base frame															
Attachment															
M1 Monitor mounting with monitor housing															
M2 Monitor mounting with monitor mounting braket															
M3 Monitor mounting without monitor housing/ -mounting braket															
M4 Monitor mounting (< 5kg) with monitor housing															
M5 Monitor mounting (< 5kg) with mounting adapter															
F1 Footrest mounted dispatch 1 KBF/435															
H Heater 2x2kW with ventilator															
LK Plate for horizontal manual adjustment for control units +/- 250 mm															
Driver seat															
KFS 10* (included in the delivery!)															
*Description see driver seat page 194															



Technical details may vary based on configuration or application! Technical data subject to change without notice!

Crane control unit

KST 19 swiveling

KST15 - 3 - M1 - F1 - LK / KFS10 / V64 / V64.1 / KL / X

Mounting for equipment boxes	
V...	Multi-axis controller (see page 1)
S...	Single-axis controller (see page 65)
D...	Double-handle controller (see page 45)
N...	Control-switch (see page 101)
...	More command and indicating devices (see page 162)
Wiring	
KL	Without wiring, but terminal block built in each terminal
KLV	On terminal block 4 qmm with single wire 1 qmm each terminal
KLV	On SPS (SPS provision) with single wire 1 qmm each terminal
KLVA	External wiring single wire highly flexible 1,5 qmm 5 m long each terminal
Special model	
X	Special / customer-specific
X¹	Special painted

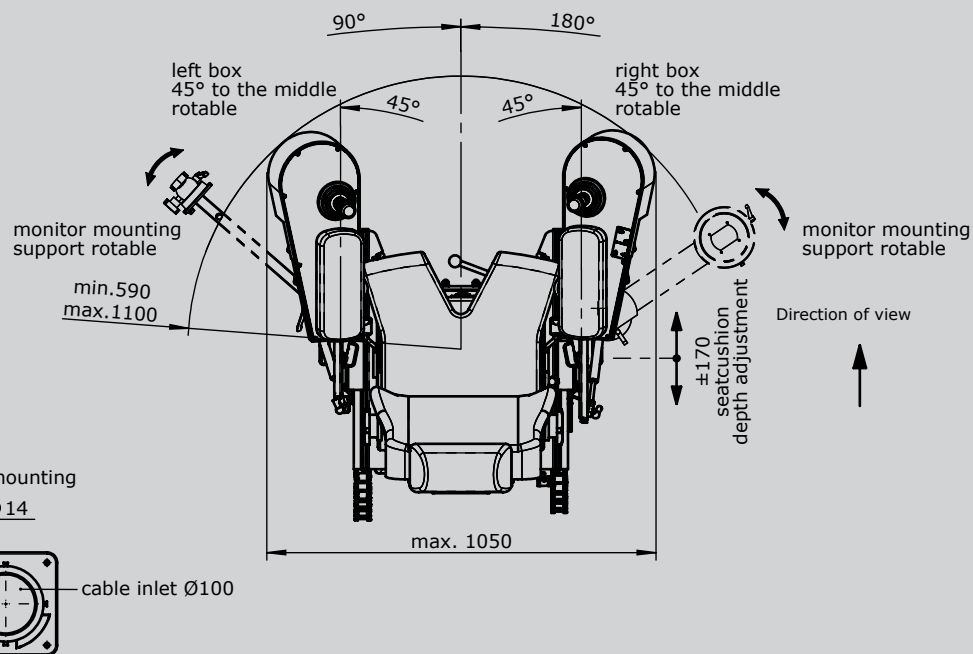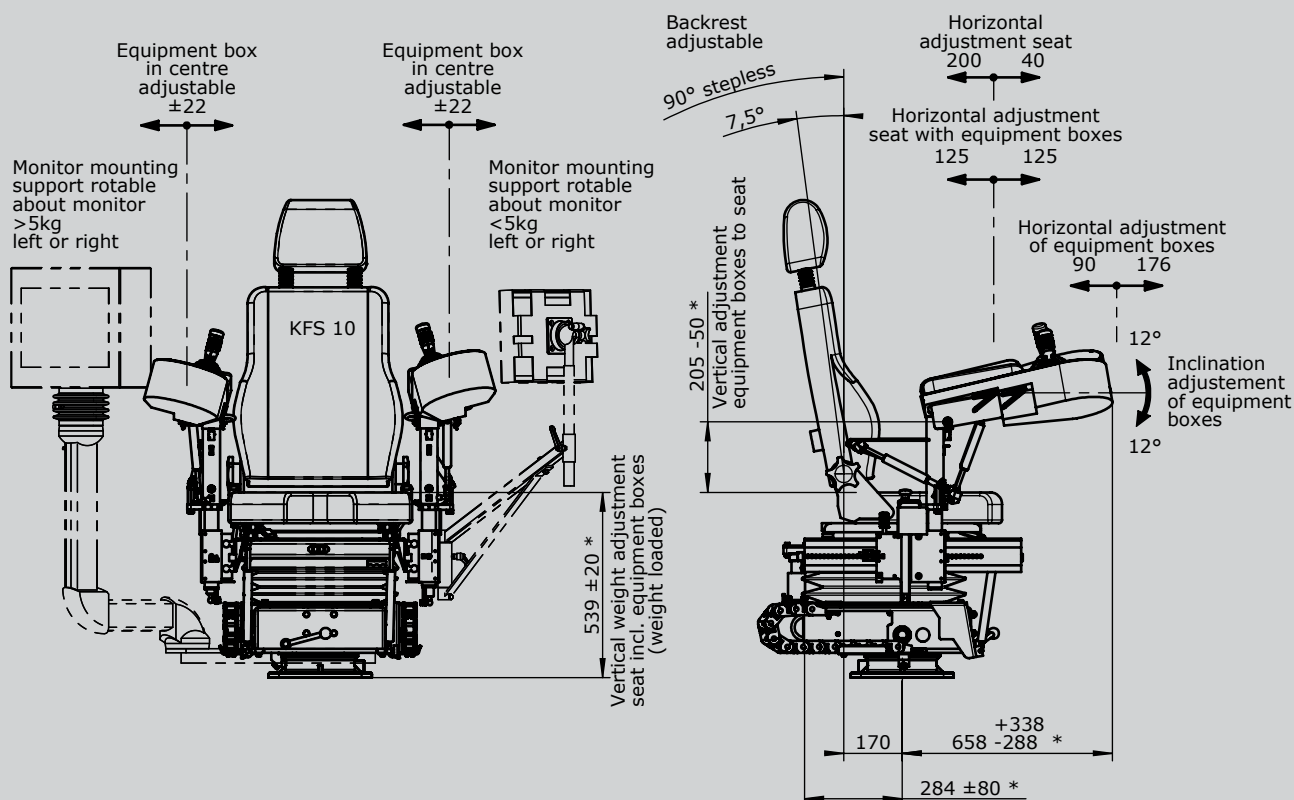

* adjustable

Driver seat KFS 2



The crane driver`s seat KFS 2 has stepless high adjustment by means of a gas-loaded spring. The backrest can be tilted, forwards onto the cushion, which in turn can then be tilted 90° sideways. All these functions are performed easily via levers.

Technical data:


Horizontal adjustment	100 mm
Inclination of the backrest	max. 10°
Height adjustment	120 mm



Example

KFS 22

Driver seat	
KFS 21	with air-permeable artificial leather cover black
KFS 22	with textil cover grey / black

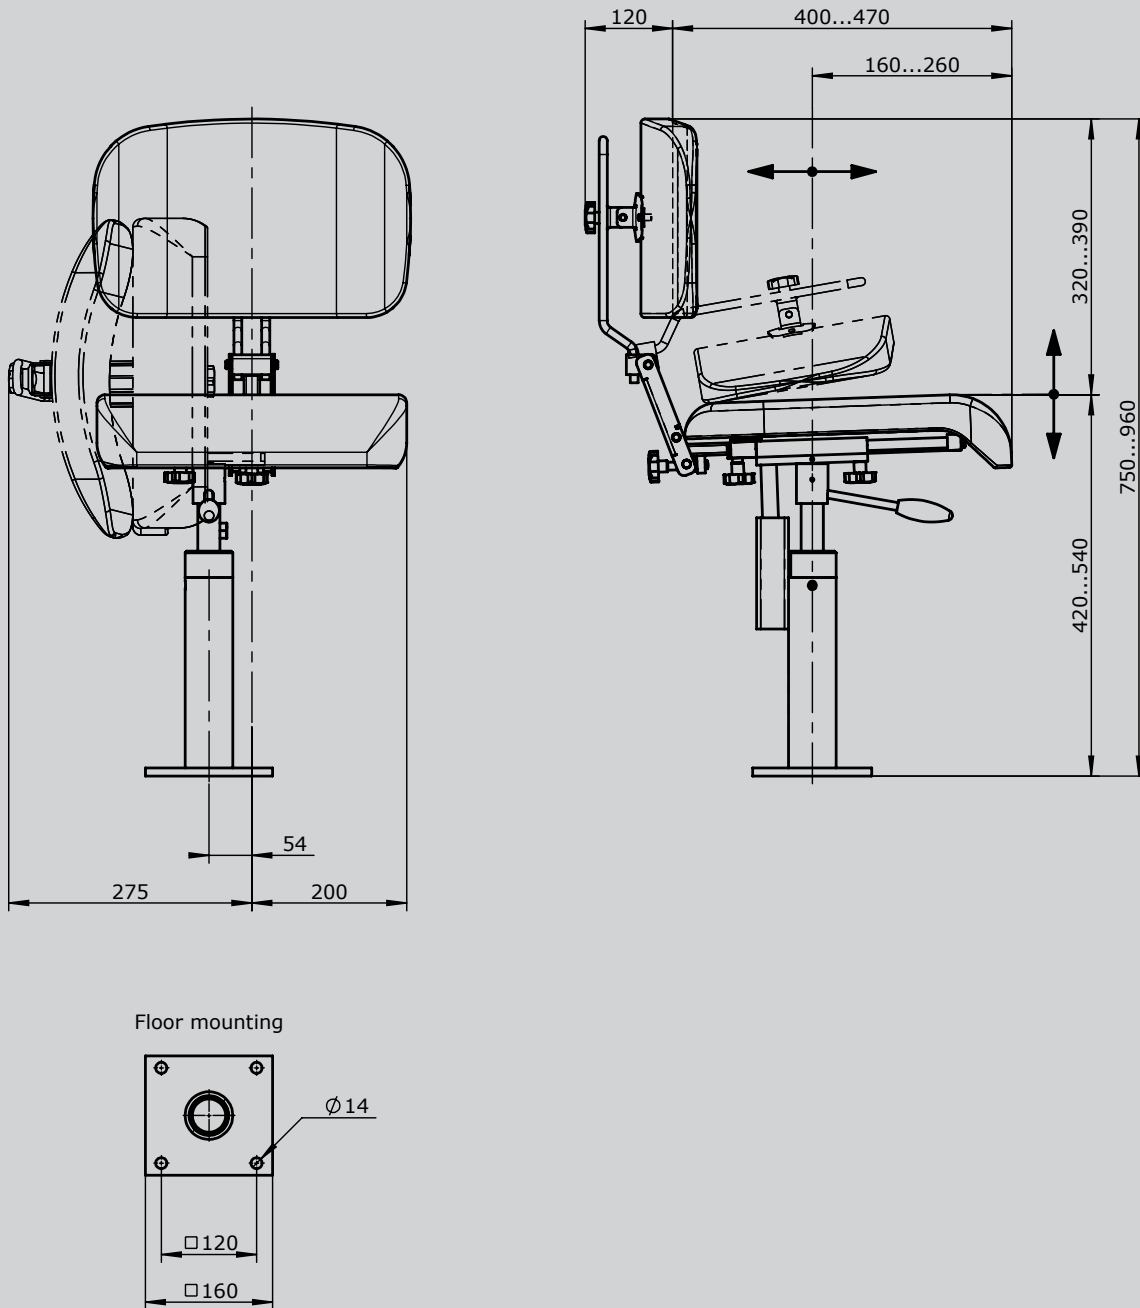

Driver seat KFS 4



The crane driver`s seat KFS 4 has stepless high adjustment by means of a gas-loaded spring and an oilhydraulic vibration absorption system with weight adjustment. The backrest can be tilted, forwards into the cushion, which in turn can then be tilted 90° sideways. All functions are performed by a simple lever operation. The metal parts are protected against corrosion and painted black.


Technical data:

Suspension stoke	80 mm
Weight adjustment	50 - 130 kg
Horizontal adjustment	100 mm
Inclination of the backrest	max. 20°
Height adjustment	100 mm



Example

		KFS 42	- A1
Driver seat			
KFS 41	Driver seat with air-permeable artificial leather cover black		
KFS 42	Driver seat with textil cover grey / black		
Attachment			
A1	Armrest fully adjustable (2 pieces) 50 mm wide		
A2	Armrest fully adjustable (2 pieces) 100 mm wide		

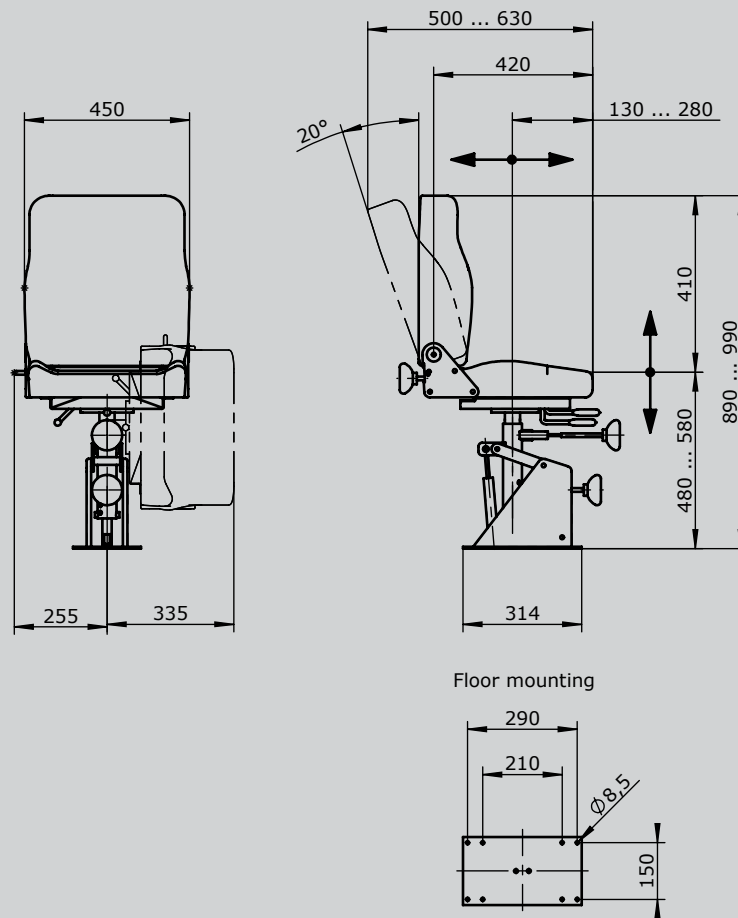

Driver seat KFS 8



The crane driver`s seat KFS 8 is a static seat with ergonomically designed and provides a high grade of comfort.
 The driver`s seat is equipped with roller-bearing swivel system.
 All adjustment controls are positioned ergonomically within easy access.
 The metal parts are protected against corrosion and painted black.

Technical data:


Horizontal adjustment	150 mm
Inclination of the backrest	max. 28°
Height adjustment	65 mm



Example

		KFS 82	- A1	- S1	- U
Driver seat					
KFS 82 Driver seat with textil cover grey / black					
Attachment					
K	Headrest				
A1	Armrest fully adjustable (2 pieces) 50 mm wide				
A2	Armrest fully adjustable (2 pieces) 100 mm wide				
S1	Safety belt 2-point mounting				
U	Base frame (Apron)				

Driver seat KFS 8

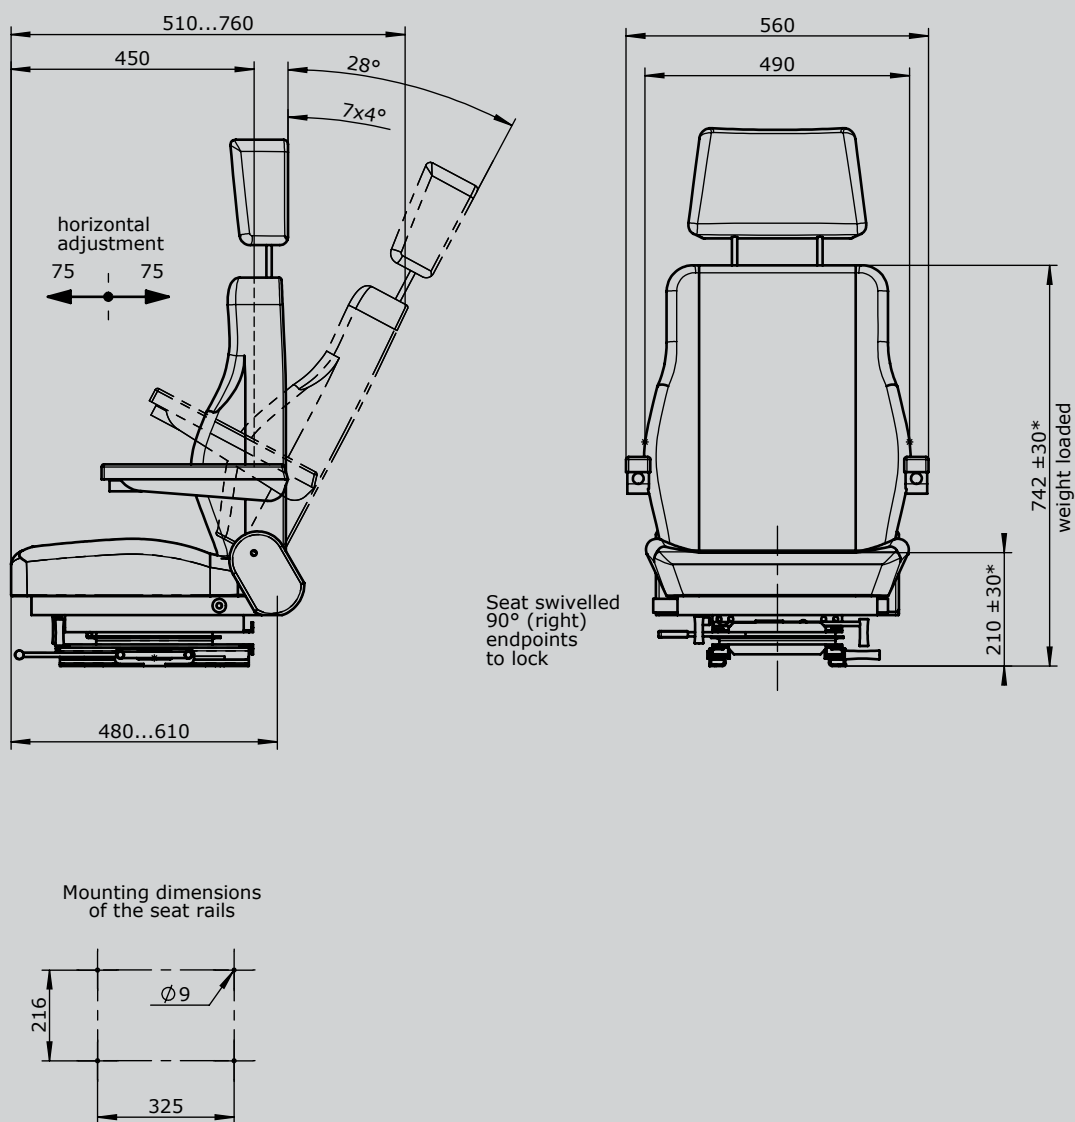

* adjustable

Driver seat KFS 9



The crane driver`s seat KFS 9 is ergonomically designed and provides a high grade of comfort.

The driver`s seat is a low level mechanical suspension seat with an oilhydraulic vibration absorption system with weight adjustment.

Upon request, a pneumatic vibrating system with weight adjustment is available.

All adjustment controls are positioned ergonomically within easy access.




The metal parts are protected against corrosion and painted black.

Technical data:


Suspension stroke	80 mm
Weight adjustment	50 - 150 kg (pneumatic) 50 - 130 kg (mechanical)
Horizontal adjustment	160 mm
Inclination of the backrest	max. 90°
Height and slope adjustment	60 mm



		Example				
		KFS 92	- A1	- L2	- S1	- P
Driver seat						
KFS 91	Driver seat with air-permeable artificial leather cover black					
KFS 92	Driver seat with textil cover grey / black					
Attachment						
K	Headrest rain					
A1	Armrest adjustable (2 pieces) 50 mm wide					
A2	Armrest continuously adjustable (2 pieces) 100 mm wide					
L1	Lumbar support manual adjustment - 2 movement					
L2	Lumbar support manual adjustment - 4 movement					
B	Seat allocation recognition					
H	Seat cushion and backrest standard with heating element 24V DC 47W					
S1	Safety belt 2 point fixing					
S2	Safety belt 4 point fixing (headrest raint required)					
P	Pneumatic vibration absorption system with weight adjustment (incl. compressor)					
LK	Plate for horizontal manual adjustment of seat adjustable +/-250 mm					
C	Loose cover					
U	Console (base)					

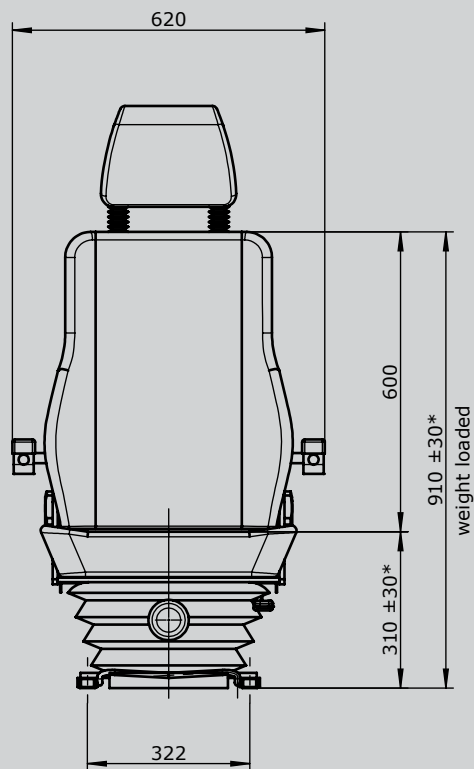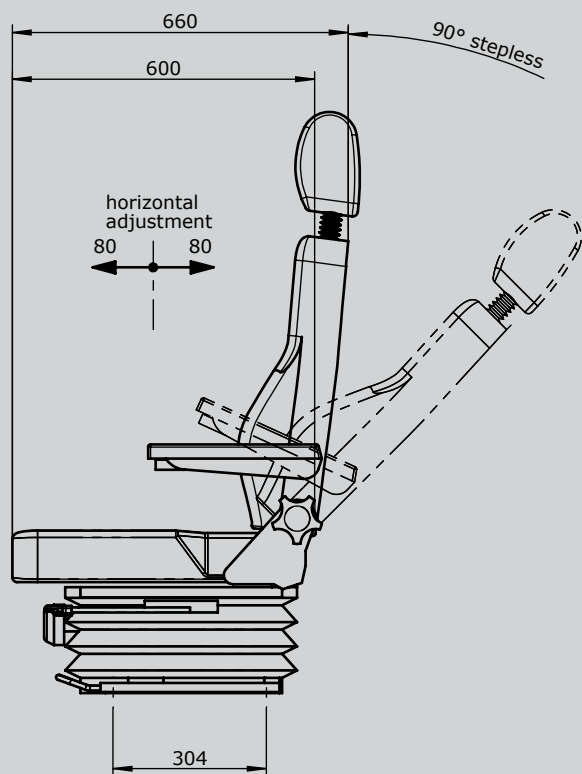

Seat cushion
v-cutout

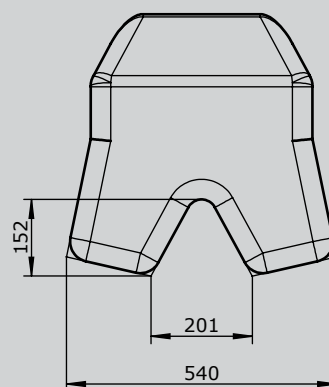

* adjustable

Driver seat KFS 10



The crane driver`s seat KFS 10 is ergonomically designed and provides a high grade of comfort.

The driver`s seat has a pneumatic vibration absorption system with weight adjustment by compressor (24 V DC 8 Ampere) and a standard seat cushion V-cut.

Through its three horizontal adjustment, it can be flexibly adapted to very many applications.

All adjustment controls are positioned ergonomically within easy access.

The metal parts are protected against corrosion and painted black.


Technical data:

Suspension stroke	80 mm
Weight adjustment	50 - 150 kg (pneumatic) 50 - 130 kg (mechanical)
Horizontal adjustment	
Seat with suspension system	160 mm
Seat part individuell	240 mm
Seat cushion	160 mm
Inclination of the backrest	max. 90°
Height and slope adjustment	60 mm



Example

	KFS 102	- A1	- L2	- S2	- R1
Driver seat					
KFS 101 Driver seat with air-permeable artificial leather cover black					
KFS 102 Driver seat with textil cover grey / black					
Attachment					
K Headrest raint					
A1 Armrest adjustable (2 pieces) 50 mm wide					
A2 Armrest continuously adjustable (2 pieces) 100 mm wide					
L1 Lumbar support manual adjustment - 2 movement					
L2 Lumbar support manual adjustment - 4 movement					
B Seat allocation recognition					
H Seat cushion and backrest with heating element 24VDC 47W					
S1 Safety belt 2 point fixing					
S2 Safety belt 4 point fixing (headrest raint required)					
U Console (base)					
R1 Price reduction pneumatic vibration absorption system					
R2 Price reduction for seat cushion without V-cut					

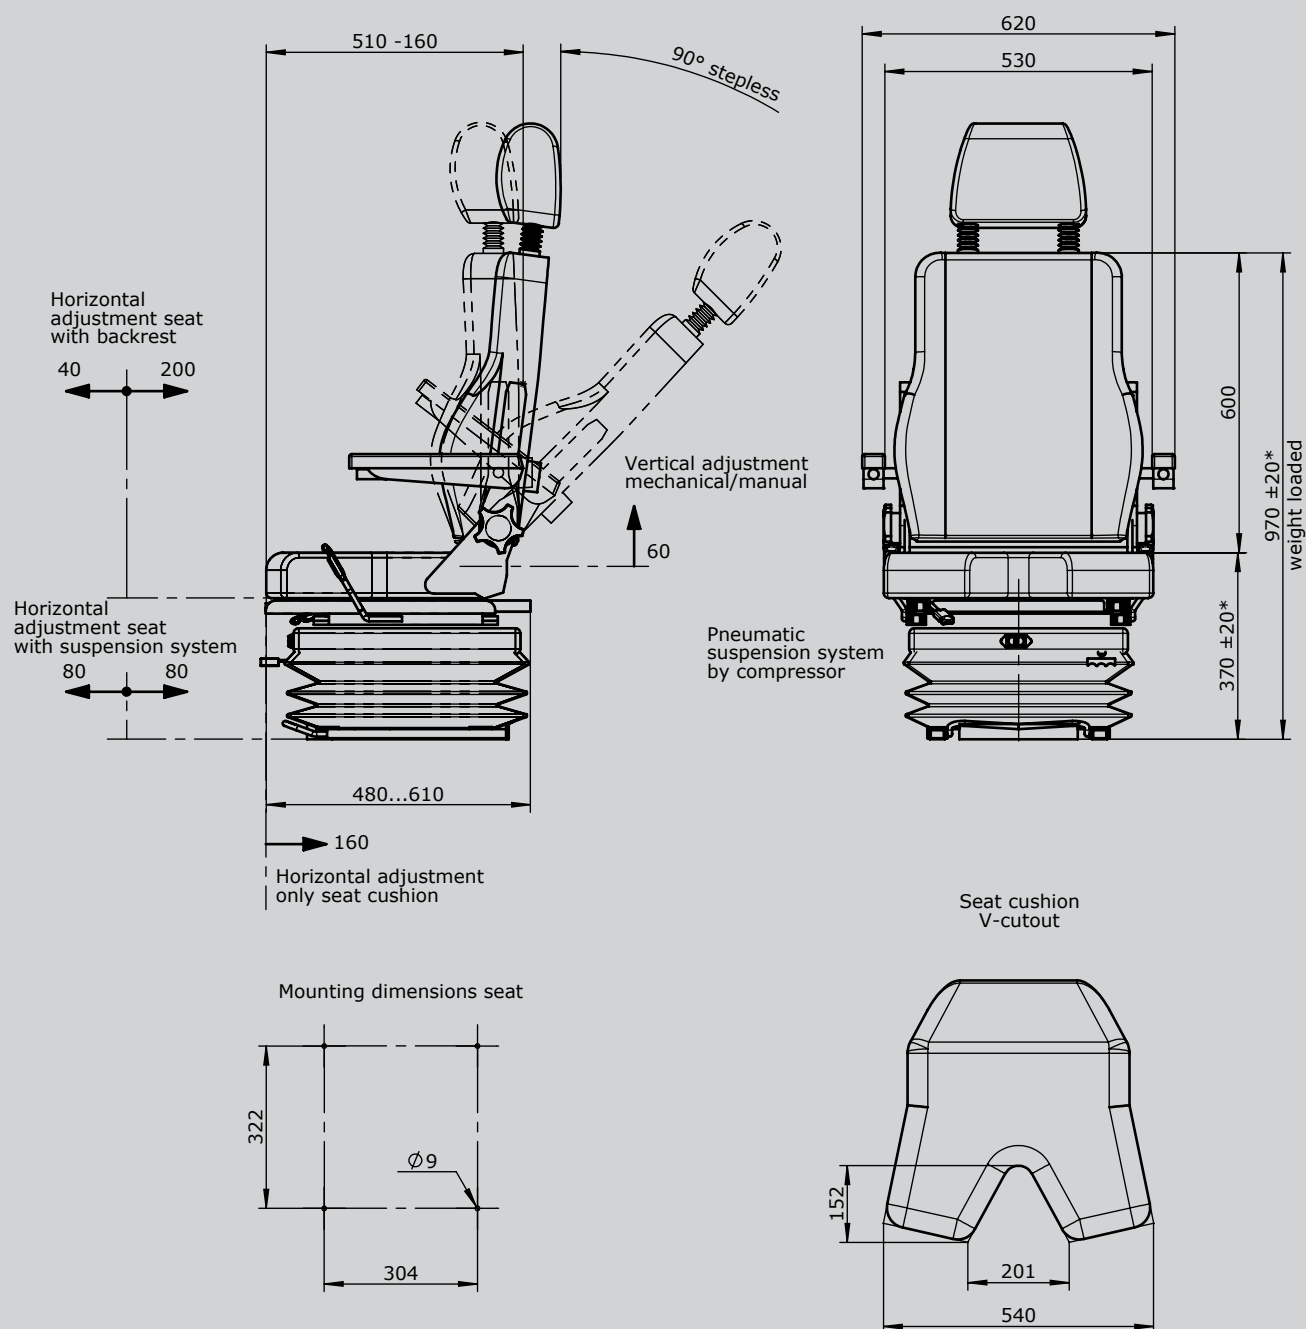

* adjustable

Driver seat KFS 11



The crane driver`s seat KFS 11 is ergonomically designed and provides a high grade of comfort.
The driver`s seat is a low level mechanical suspension seat with an oilhydraulic vibration absorption system with weight adjustment.
All adjustment controls are positioned ergonomically within easy access.
The metal parts are protected against corrosion and painted black.



Technical data:

Suspension stoke	80 mm
Weight adjustment	50 - 150 kg
Horizontal adjustment	230 mm
Inclination of the backrest	-12°/+40°
Slope adjustment	-10°/+12°
Height adjustment	65 mm







Example

		KFS 11	- A1	- S1
Driver seat				
KFS 11	Driver seat with textil cover grey / black			
Attachment				
K	Headrest raint			
A1	Armrest adjustable (2 pieces) 50 mm wide			
A2	Armrest continuously adjustable (2 pieces) 100 mm wide			
H	Seat cushion and backrest with heating element 24VDC 47W			
S1	Safety belt 2 point fixing			
LK	Plate for horizontal manual adjustment of seat adjustable +/-250 mm			
C	Loose cover			
U	Console (base)			

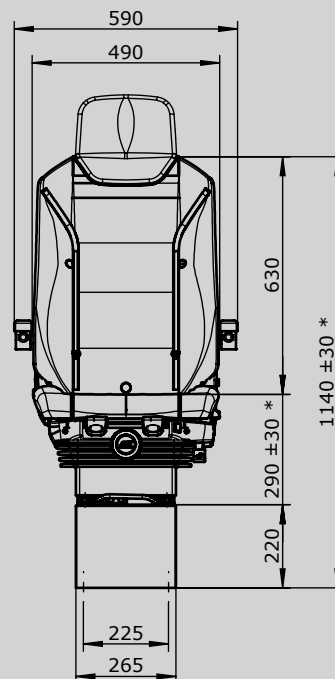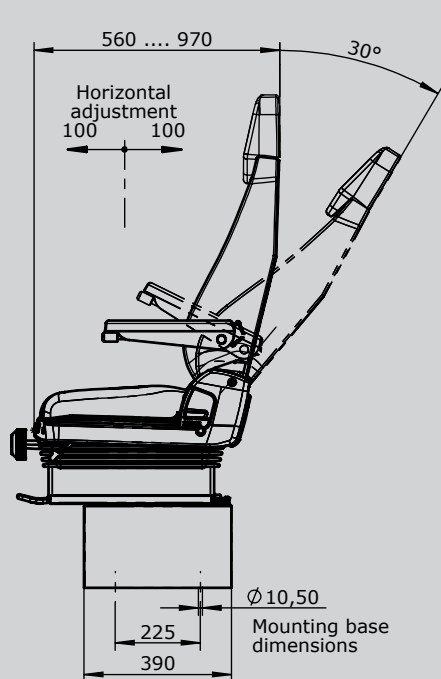

Special equipment

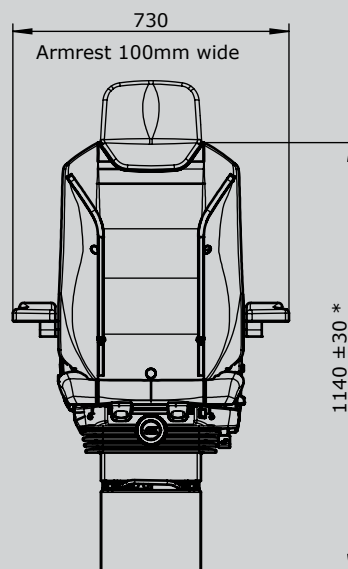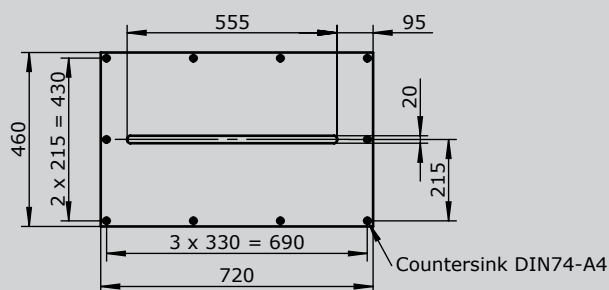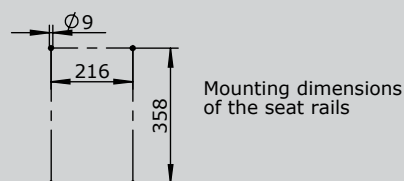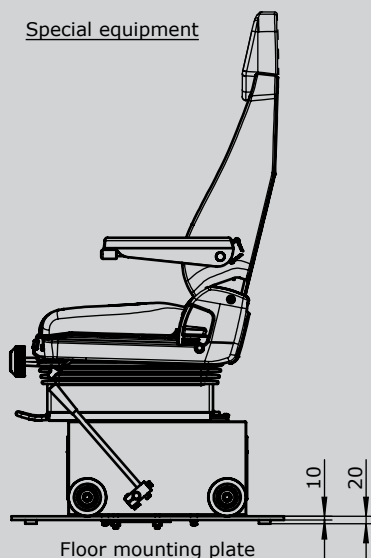

* adjustable

Driver seat KFS 12





The crane driver`s seat KFS 12 is ergonomically designed and provides a high grade of comfort.
 The driver's seat is equipped with an air-sprung vibration system.
 The weight adjustment is infinitely.
 Heated seats 24V, lumbar support, seat cushion adjustment, seat allocation recognition and headrest raint are included in the standard delivery.
 All adjustment controls are positioned ergonomically within easy access.
 The metal parts are protected against corrosion and painted black.

Technical data:



Suspension stoke	80 mm
Weight adjustment	50 - 150 kg
Horizontal adjustment	230 mm
Inclination of the backrest	-12°/+40°
Slope adjustment	-10°/+12°
Height adjustment	100 mm
Seat cushion adjustment	60 mm





Example		KFS 12	- A1	- S1
Driver seat				
KFS 12 Driver seat with textil cover grey / black				
Attachment				
A1	Armrest adjustable (2 pieces) 50 mm wide			
A2	Armrest continuously adjustable (2 pieces) 100 mm wide			
S1	Safety belt 2 point fixing			
LK	Plate for horizontal manual adjustment of seat adjustable +/-250 mm			
C	Loose cover			
U	Console (base)			

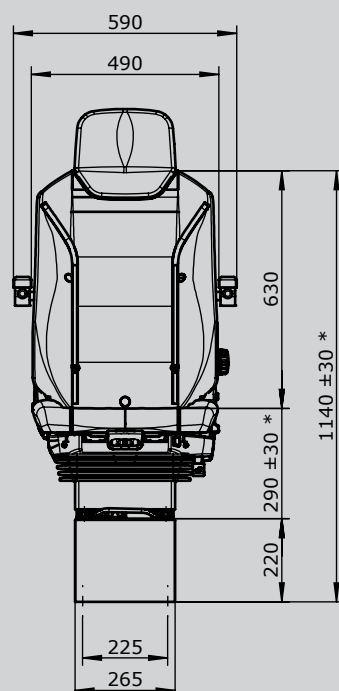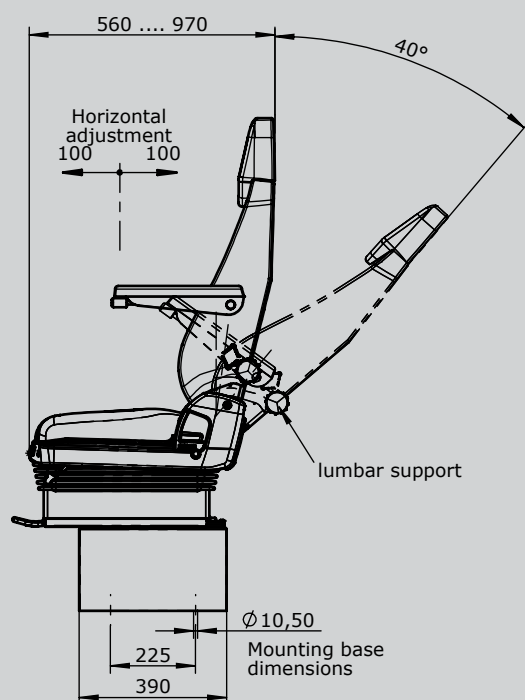

Special equipment

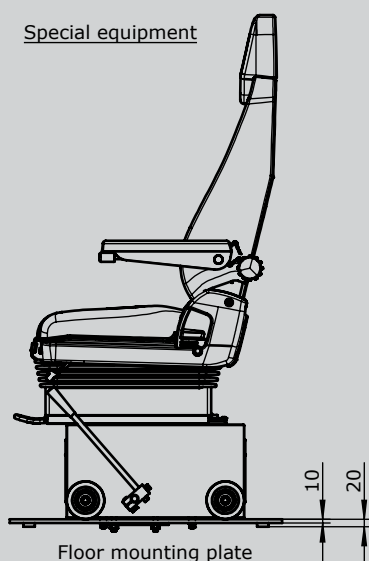

Mounting dimensions
of the seat rails

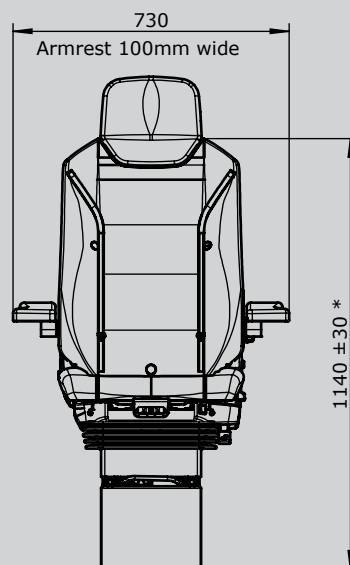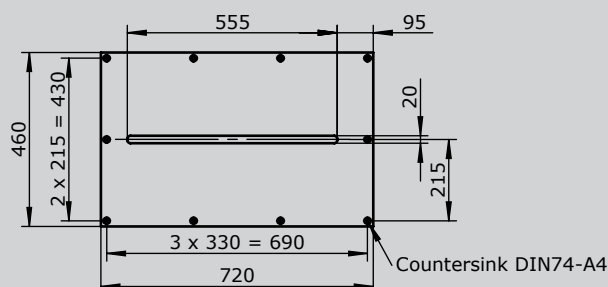

* adjustable

Portable control unit TS 1



The portable control unit TS 1 is used for controlling and monitoring the necessary equipment.
The chest panel and straps enable the operator to carry it without becoming tired.
An adjustable carrying strap can also be fitted for use without the chest plate.

Surface treatment:
Priming and structur-finishing paint
Standard colour RAL 7032 pebble-grey

Technical data:

Operation temperature	-40°C to +60°C
Degree of protection	IP 54



	TS 1	- SB 1	- RH 1	- K 4	- HS 1	/	V...	/	KLS	/	X
<i>Example</i>											
Basic unit											
TS 1 with chest plate and straps											
TS 11 with straps											
Attachment											
SB 1 Legs for control unit alu-tube 2 pieces											
SB 2 Legs for control unit stainless steel-tube V2 A 2 pieces											
RH 1 Reeling hooks for control unit stainless steel V2 A											
K 1 Cable entry M 32 cable 11-21 mm											
K 2 Cable entry M 40 cable 19-28 mm											
K 3 Cable entry 180° swiveling M 32 cable 11-21 mm											
K 4 Cable entry 180° swiveling M 40 cable 19-28 mm											
HS 1 Plug in socket 16-pole male insert											
HB 1 Connector 16-pole female insert											
HS 2 Plug in socket 24-pole female insert											
HB 2 Connector 24-pole female insert											
HS 3 Plug in socket 32-pole male insert											
HB 3 Connector 32-pole female insert											
<i>Indicating labels not engraved for multi-axis-/ single-axis controller</i>											
<i>Indicating labels engraved for multi-axis-/ single-axis controller</i>											
Mountig for equipment boxes											
V Multi-axis controller (see page 1)											
S Single-axis controller (see page 65)											
N Control-switch (see page 101)											
... More command and indicating devices (see page 162)											
Cable and wiring											
Cable Oelflex	18x1 mm	13,4 mm Ø	-5°C til +80°C	each metre							
Cable Oelflex	25x1 mm	15,4 mm Ø	-5°C til +80°C	each metre							
Cable Oelflex	34x1 mm	18,6 mm Ø	-5°C til +80°C	each metre							
Cable Neonflex	18x1 mm	19,2 mm Ø	-30°C til +80°C	each metre							
Cabel Neonflex	24x1 mm	22,1 mm Ø	-30°C til +80°C	each metre							
Cabel Neonflex	38x1 mm	26,1 mm Ø	-30°C til +80°C	each metre							
KLS	Wired on connector / plug in socket per core										
KLK	Wiring for cable per core										

Technical details may vary based on configuration or application! Technical data subject to change without notice!


TS 1 - SB 1 - RH 1 - K 4 - HS 1 / V... / KLS / X

Special model



- X Special / customer-specific
- X1 Housing antistatic design < 10⁹ Ohm/cm
- X2 Finishing colour yellow RAL 1021

Portable control unit TS 1



With chest plate and straps
Protection IP 65
with multi-axis controllers IP 54

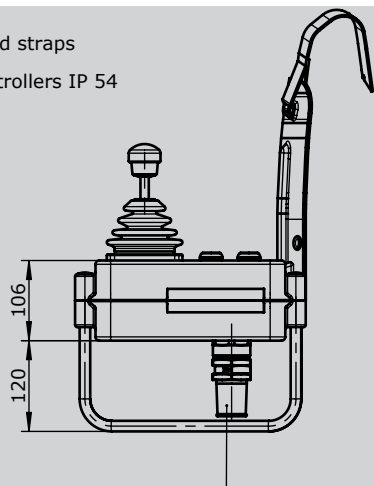

Cable entry
with anti-kink protection
and strain relief or connectors

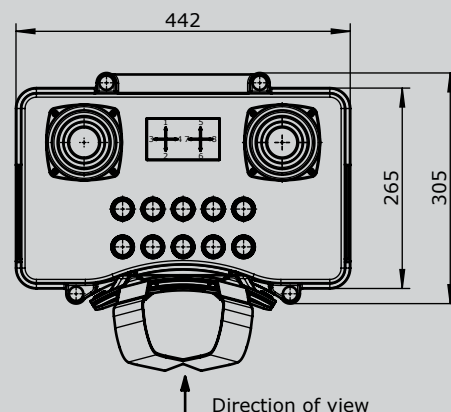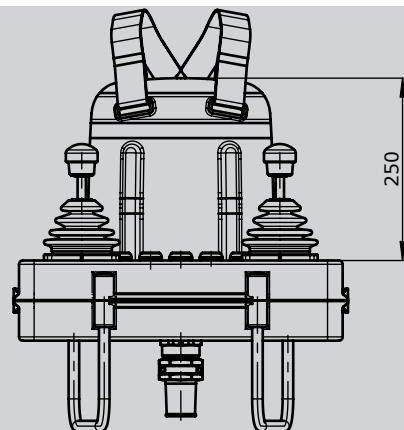

With adjustable carrying strap
Protection IP 65
with multi-axis controllers IP 54

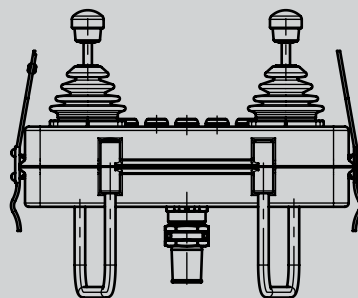

Portable control unit TS 2



The portable control unit TS 2 is used for controlling and monitoring the necessary equipment.
The chest panel and straps enable the operator to carry it without becoming tired.
An adjustable carrying strap can also be fitted for use without the chest plate.

Surface treatment:
Priming and structur-finishng paint
Standard colour RAL 7032 pebble-grey



Technical data:

Operation temperature	-40°C to +60°C
Degree of protection	IP 65

Example

	TS 2	- SB 1	- RH 1	- K 4	- HS 1	/	V...	/	KLS	/	X
Basic unit											
TS 2	with chest plate, straps										
TS 21	with straps										
TS 22	with bracket and straps										
Attachment											
SB 1	Legs for control unit alu-tube 2 pieces										
SB 2	Legs for control unit stainless steel-tube V2 A 2 pieces										
RH 1	Reeling hooks for control unit stainless steel V2 A										
K 1	Cable entry M 32 cable 11-21 mm										
K 2	Cable entry M 40 cable 19-28 mm										
K 3	Cable entry 180° swiveling M 32 cable 11-21 mm										
K 4	Cable entry 180° swiveling M 40 cable 19-28 mm										
HS 1	Plug in socket 16-pole male insert										
HB 1	Connector 16-pole female insert										
HS 2	Plug in socket 24-pole female insert										
HB 2	Connector 24-pole female insert										
HS 3	Plug in socket 32-pole male insert										
HB 3	Connector 32-pole female insert										
<i>Indicating labels not engraved for multi-axis-/ single-axis controller</i>											
<i>Indicating labels engraved for multi-axis-/ single-axis controller</i>											
Mounting for equipment boxes											
V	Multi-axis controller (see page 1)										
S	Single-axis controller (see page 65)										
N	Control-switch (see page 101)										
...	More command and indicating devices (see page 162)										

Technical details may vary based on configuration or application! Technical data subject to change without notice!


Portable control unit TS 2

TS 2 - SB 1 - RH 1 - K 4 - HS 1 / V... / KLS / X


Cable and wiring				
Cable Oelflex	18x1 mm	13,4 mm Ø	-5°C til +80°C	each metre
Cable Oelflex	25x1 mm	15,4 mm Ø	-5°C til +80°C	each metre
Cable Oelflex	34x1 mm	18,6 mm Ø	-5°C til +80°C	each metre
Cable Neonflex	18x1 mm	19,2 mm Ø	-30°C til +80°C	each metre
Cable Neonflex	24x1 mm	22,1 mm Ø	-30°C til +80°C	each metre
Cable Neonflex	38x1 mm	26,1 mm Ø	-30°C til +80°C	each metre
KLS	Wired on connector / plug in socket per core			
KLK	Wiring for cable per core			
Special model				
X	Special / customer-specific			
X1	Housing antistatic design < 10 ⁹ Ohm/cm			
X2	Finishing color yellow RAL 1021			

Portable control unit TS 2



With chest plate and straps
Protection IP 65
with multi-axis controllers IP 54

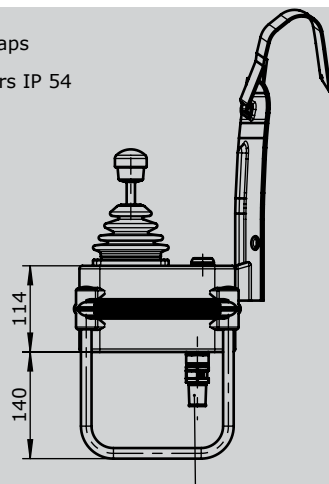


Cable entry
with anti-kink protection
and strain relief or connectors

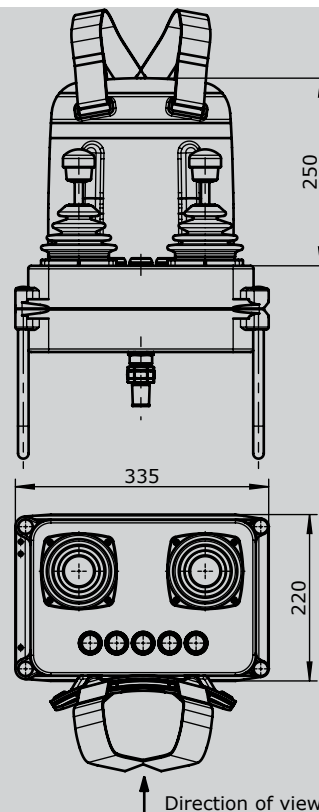


With adjustable carrying strap
Protection IP 65
with multi-axis controllers IP 54



With bracket and cable entry swivelling
Protection IP 65
with multi-axis controllers IP 54



Cable entry 180° swivelling
with anti-kink protection
and strain relief or connectors

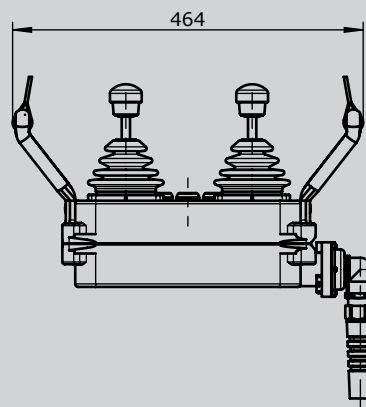

Control pedestal for offshore

U22 / 32



The control pedestal U22 / 32 accommodates the devices necessary for control and monitoring.

Ready wired, it can be quickly and easily installed on the sea deck.

The housing (pedestal head) is made of seawater-resistant aluminium.

Surface treatment:

Priming and structur-finishing paint

Standard colour RAL 7032 pebble-grey



Technical data:

Operation temperature	-40°C til +60°C
Degree of protection	IP 66

Example

U22 / 32 / **N61.../ N62...** / **H / PW / 2D** / **PQ** / **KLV** / **X**

Housing

U22/32 With 1 narrow side-plate with pillar-gasket

FD Side-plate narrow gasket

HD Side-plate wide gasket
(required for command and indicating devices)

KD Hinged side-plate with gasket that can be locked in position

IA Monitoring devices cover with gasket for max. 2 monitors 72x72 mm or 4 monitors 72x36 mm and max. 6 indicating devices pos. 28, 29

RS Pillar 108 mm Ø 670 mm height with flange quadratic or round

Masterswitch / Control-switch

N61 HG Masterswitch with ball handle and indicating labels

N62 KN Control-switch with knob and indicating label

- HG - 01 Z P - A05 P134 - X

Axis 1: direction 3-4

(Standard contacts gold-plated 2A 250V AC15)

01 2 contacts Standard contact - arrangement see page 106

02 4 contacts z.B.

03 6 contacts A05 MS 21

04 8 contacts A0500 MS 21-00

A99 contact - arrangement according customer request

Z Spring return

R Friction brake

P Potentiometer P131 T396 2x0,5 kOhm I max. 1 mA

P132 T396 2x1 kOhm I max. 1 mA

P133 T396 2x2 kOhm I max. 1 mA

P134 T396 2x5 kOhm I max. 1 mA

P135 T396 2x10 kOhm I max. 1 mA

More potentiometer on request!








U22 / 32 / N61.../N62... / H / PW / 2D / PQ / KLV / X

Command and indicating devices			
H	Heating	20 Watt 220 or 110 V 50/60 Hz	
PV	Mushroom head push button latching	22 latching with indicating label	1 NC
P	Mushroom head push button	22 with indicating label	1 NO
D	Push button	22 with indicating label	1 NO
W	Selector switch 0--1	22 with indicating label	1 NO
L	Indicator light	22 with indicating label	Diode 24 Volt
L	Indicator light	22 with indicating label	Diode 230 Volt AC
	Contact block additional		1 S or 1 Ö
L	Indicator light	22 with indicating label	Diode 24 Volt protection IP65
L	Indicator light	10 with indicating label	Diode 24 Volt protection IP65

Display devices		
PQ	Powermeter PQ 72 1mA DC	Engraved your instructions
PQI	Powermeter PQ 72 1mA DC illuminated 24 Volt	Engraved your instructions
PQ	Powermeter PQ 72x36 1 mA DC	Engraved your instructions
PQI	Powermeter PQ 72x36 1 mA DC illuminated 24 Volt	Engraved your instructions
EQ	Amperemeter EQ 72 100/200/ 1A	Engraved your instructions
EQI	Amperemeter EQ 72 100/200/ 1A illuminated 24 Volt	Engraved your instructions
EQ	Amperemeter EQ 72x36 100/200/1A	Engraved your instructions
EQI	Amperemeter EQ 72x36 100/200/1A illuminated 24 Volt	Engraved your instructions

Wiring	
KLV on terminal block 2,5 qmm with wire line 0,75 qmm	

Special model	
X	Special / customer-specific

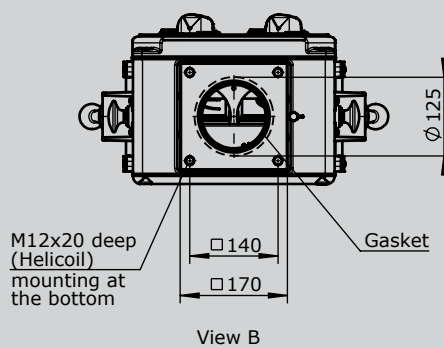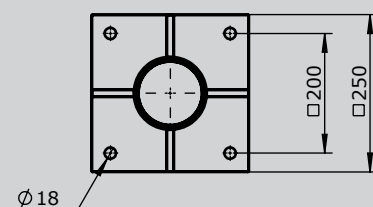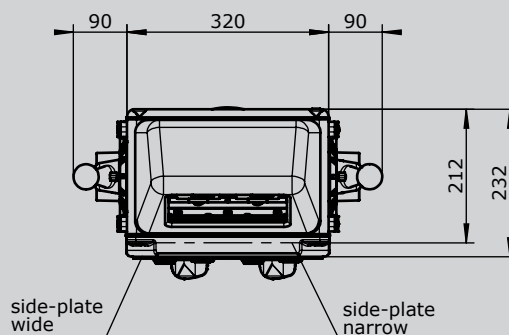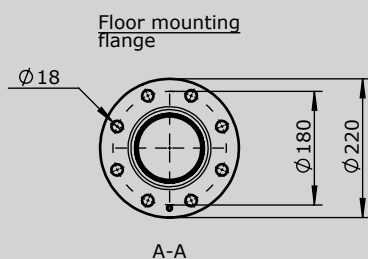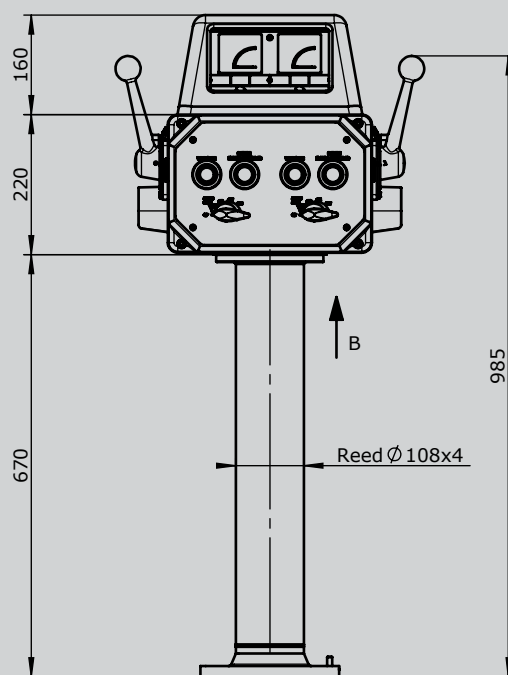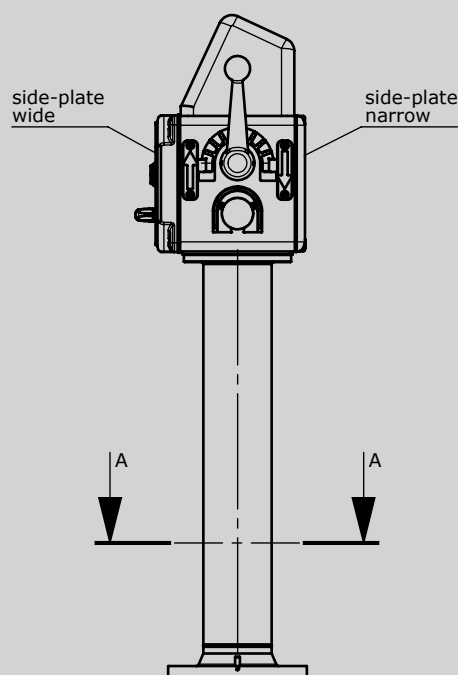

Control pedestal for offshore U23 / 23



The control pedestal U22 / 23 accommodates the devices necessary for control and monitoring.

Ready wired, it can be quickly and easily installed on the sea deck. The housing (pedestal head) is made of seawater-resistant aluminium.

Surface treatment:

Priming and structur-finish paint

Standard colour RAL 7032 pebble-grey

Technical data:

Operation temperature

-40°C to +60°C

Degree of protection

IP 66



Example

		U23 / 23	/	N61.../N62...	/	H / PW / 2D	/	PQ	/	KL	V	X
Housing												
U23/23	with 1 narrow side-plate with pillar-gasket											
U23/23A	Side-plate narrow gasket											
IA	Monitoring devices cover with gasket for max. 2 monitors 72x72 mm or 4 monitors 72x36 mm and max. 6 indicating devices pos. 28, 29											
RS	Pillar 108 mm Ø 670 mm height with flange quadratic or round											
Masterswitch / Control-switch												
N61	HG Masterswitch with ball handle and indicating labels											
N62	KN Control-switch with knob and indicating label											
		- HG	- 01 Z P	- A05	P134	- X						
Axis 1: direction 3-4												
		(Standard contacts gold-plated 2A 250V AC15)										
01	2 contacts	Standard contact - arrangement see page 106										
02	4 contacts	z.B.										
03	6 contacts	A05	MS 21									
04	8 contacts	A0500	MS 21-00									
		A99 contact - arrangement according customer request										
Z	Spring return											
R	Friction brake											
P	Potentiometer	P131	T396 2x0,5 kOhm	I max. 1 mA								
		P132	T396 2x1 kOhm	I max. 1 mA								
		P133	T396 2x2 kOhm	I max. 1 mA								
		P134	T396 2x5 kOhm	I max. 1 mA								
		P135	T396 2x10 kOhm	I max. 1 mA								
		More potentiometer on request!										

U23 / 23 / N61.../N62... / H / PW / 2D / PQ / KLV / X

Command and indicating devices

H	Heating	20 Watt 220 or 110 V 50/60 Hz	
PV	Mushroom head push button latching	22 latching with indicating label	1 NC
P	Mushroom head push button	22 with indicating label	1 NO
D	Push button	22 with indicating label	1 NO
W	Selector switch 0--1	22 with indicating label	1 NO
L	Indicator light	22 with indicating label	Diode 24 Volt
L	Indicator light	22 with indicating label	Diode 230 Volt AC
	Contact block additional		1 S or 1 Ö
L	Indicator light	22 with indicating label	Diode 24 Volt protection IP65
L	Indicator light	10 with indicating label	Diode 24 Volt protection IP65

Display devices






PQ	Powermeter PQ 72 1mA DC	Engraved your instructions
PQI	Powermeter PQ 72 1mA DC illuminated 24 Volt	Engraved your instructions
PQ	Powermeter PQ 72x36 1 mA DC	Engraved your instructions
PQI	Powermeter PQ 72x36 1 mA DC illuminated 24 Volt	Engraved your instructions
EQ	Amperemeter EQ 72 100/200/ 1A	Engraved your instructions
EQI	Amperemeter EQ 72 100/200/ 1A illuminated 24 Volt	Engraved your instructions
EQ	Amperemeter EQ 72x36 100/200/1A	Engraved your instructions
EQI	Amperemeter EQ 72x36 100/200/1A illuminated 24 Volt	Engraved your instructions

Wiring

KLV on terminal block 2,5 qmm with wire line 0,75 qmm

Special model

X Special / customer-specific

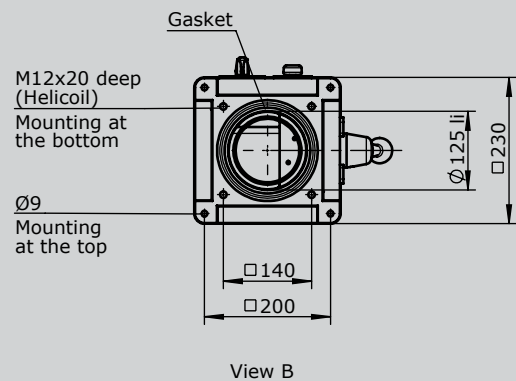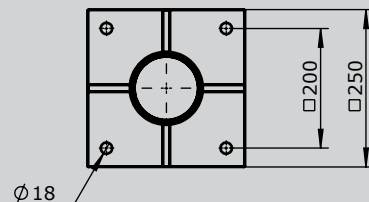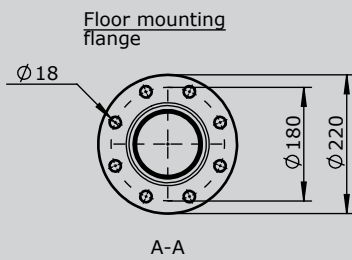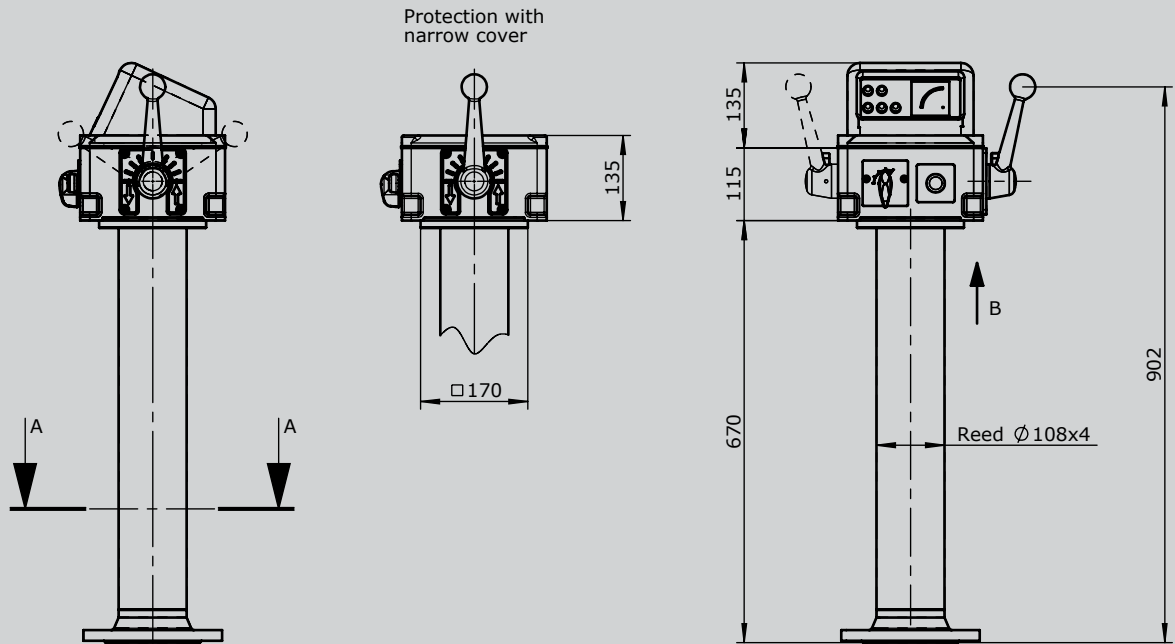


Ordering information

Customer _____

Order No. _____

Equipment box left	Pos. No.	Type	Colour	Label text (max. 2 x 12 characters)	Plant ref.	Destination	Notes
	1						
	2						
	3						
	4						
	5						
	6						
	7						
	8						
	9						
	10						
	11						
	12						
	13						
	14						
	15						
	16						
	17						
	18						
	19						
	20						
	21						
	22						
	23						
	24						

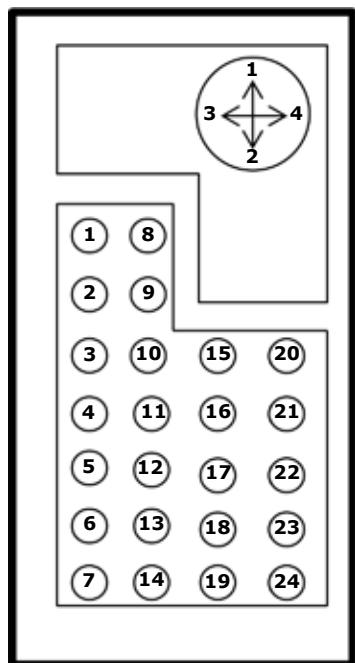

Maximum installation of command and indicating devices 22 (see 1/360) in our control units and housings if our multi-axis controllers V62 (see 1/100) are used. Additional command and indicating devices can be installed of multi-axis controllers V64 or V11 (see 1/100) are used. (please enquire)

Control unit (see 2/030ff.)
Type


		No. of pieces max.
KST 3	1 - 6, 8 - 13, 15 - 18	16
KST 41/181	1 - 5, 10 - 12	8
KST 42/182	1 - 5, 8 - 12, 15 - 17	13
KST 51/151	3 - 7, 10 - 14, 15 - 19, 20 - 24	20
KST 52/53/54/152/154	1 - 24	24
KST 6	3 - 4, 10 - 11, 15 - 16	6
KST 7	1 - 24	24
KST 75	1 - 19	19

Technical details may vary based on configuration or application! Technical data subject to change without notice!

Customer _____

Order No. _____

Pos. No.	Type	Colour	Label text (max). 2 x 12 characters)	Plant ref.	Desti- nation	Notes	Equipment box right
1							
2							
3							
4							
5							
6							
7							
8							
9							
10							
11							
12							
13							
14							
15							
16							
17							
18							
19							
20							
21							
22							
23							
24							

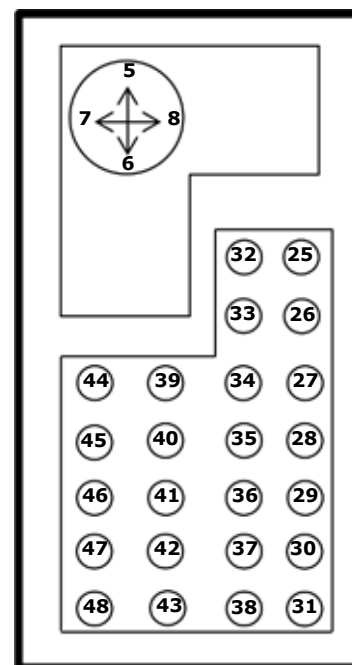



Maximum installation of command and indicating devices 22 (see 1/360) in our control units and housings if our multi-axis controllers V62 (see 1/100) are used. Additional command and indicating devices can be installed if multi-axis controllers V64 or V11 (see 1/110) are used. (please enquire)

	No. of pieces max.	Control unit (see 2/030ff.) Type
25 - 30, 32 - 37, 39 - 42	16	KST 3
25 - 29, 34 - 36	8	KST 41/181
25 - 29, 32 - 36, 39 - 41	13	KST 42/182
27 - 31, 34 - 38, 39 - 43, 44 - 48	20	KST 51/151
25 - 48	24	KST 52/53/54/152/154
27 - 28, 34 - 35, 39 - 40	6	KST 6
25 - 48	24	KST 7
25 - 43	19	KST 75

Technical details may vary based on configuration or application! Technical data subject to change without notice!

Customer _____ Order No. _____

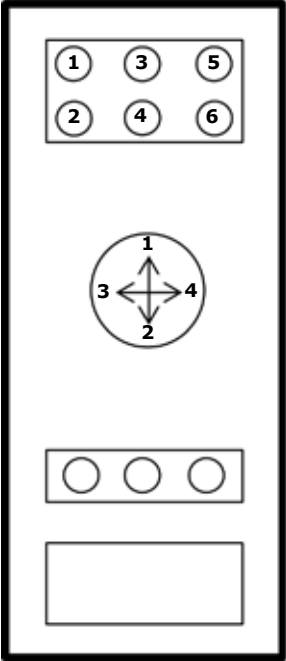
Equipment box left		Pos. No.	Type	Colour	Lable text (max). 2 x 12 characters)	Plant ref.	Desti- nation	Notes
	Max. 6 pcs. installation of command and indicating devices 22 (see 1/360) or 1 pcs. monitoring device 72 x 72 mm	1						
		2						
		3						
		4						
		5						
	Multi-axis controller V64 (see 1/100) or V11 (see 1/110)	6						
		7						
		8						
	Max. 3 pcs. installation of command and indicating devices 22 (see 1/360)	9						
		10						
		11						
	Place to put on devices	12						

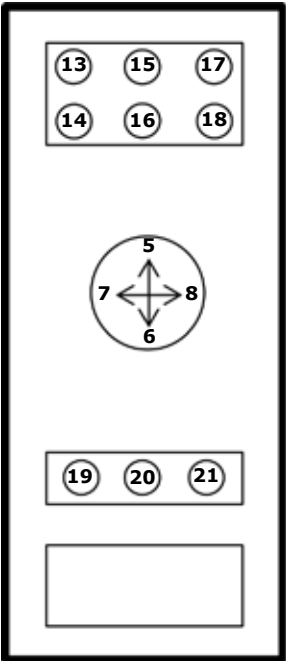Equipment box right		Pos. No.	Type	Colour	Lable text (max). 2 x 12 characters)	Plant ref.	Desti- nation	Notes
	Max. 6 pcs. installation of command and indicating devices 22 (see 1/360) or 1 pcs. monitoring device 72 x 72 mm	13						
		14						
		15						
		16						
		17						
	Multi-axis controller V64 (see 1/100) or V11 (see 1/110)	18						
		19						
		20						
	Max. 3 pcs. installation of command and indicating devices 22 (see 1/360)	21						
		22						
		23						
	Place to put on devices	24						


Ordering information KST 10

Customer _____

Order No. _____

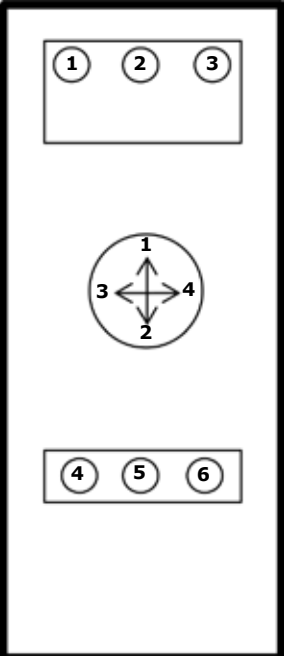Equipment box left	Pos. No.	Type	Colour	Label text (max). 2 x 12 characters)	Plant ref.	Desti- nation	Notes
 <p>Max. 3 pcs. installation of command and indicating devices 22 (see 1/360)</p> <p>Multi-axis con- troller V11, V14, V25, V85 (see 1/110ff)</p> <p>Max. 3 pcs. installation of command and indicating devices 22 (see 1/360)</p>	1						
	2						
	3						
	4						
	5						
	6						
	7						
	8						
	9						


3

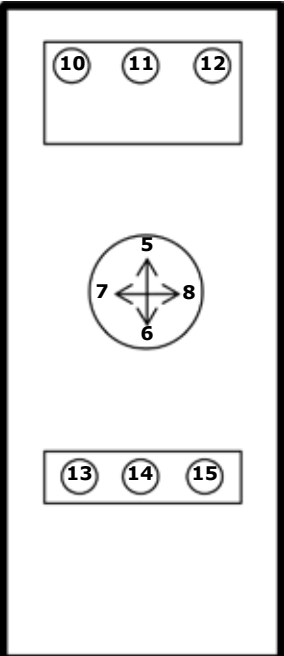Equipment box right	Pos. No.	Type	Colour	Label text (max). 2 x 12 characters)	Plant ref.	Desti- nation	Notes
 <p>Max. 3 pcs. installation of command and indicating devices 22 (see 1/360)</p> <p>Multi-axis con- troller V11, V14, V25, V85 (see 1/110ff)</p> <p>Max. 3 pcs. installation of command and indicating devices 22 (see 1/360)</p>	13						
	14						
	15						
	16						
	17						
	18						

Order information KST 19

Customer

Order No. _____

Equipment box left	Pos. No.	Type	Colour	Label text (max). 2 x 12 characters)	Plant-ref.	Desti- nation	Notes
<p>Multi-axis controller V11, V14, V25, V85 see 1/11 Off.</p> <p>max. 7 installations of command and indicating devices 22 (see 1/360)</p> 	1						
	2						
	3						
	4						
	5						
	6						
	7						
	8						
	9						

[illegible]

Naval cruise controller AZ1



The naval cruise controller AZ1 is a rugged switching device.
The modular design enables the switching device to be used universally.

The design includes:
The mechanical control-system for the engine speed 0-max. rpm. switching angle 60 degrees with pressure print at 7 degrees and friction brake direction 0-2.
The mechanical control-system for the steering left/right direction 13-14, 360 degrees with pressure points 4x90 degrees and friction brake.



The AZ1 is resistant to oil, maritime climate, ozone and UV radiation.






Technical data

Mechanical life AZ 1	12 million operating cycles
Operation temperature	-40°C til +60°C
Degree of protection	IP 66

	AZ1	- L	- N	E2112	- X
Example					
Basic unit					
AZ1	Naval cruise controller				
Options					
L	Scale illuminated (LED) 24V dimmable				
N	Follow-up control system 24 Volt DC for direction 0-2 and 13-14				
Interface					
Voltage output (not stabilized)					
Supply voltage 4,75-5,25VDC					
Characteristic: 1= contra rotating, 2= concurrently rotating					
0,5...2,5...4,5V redundant per axis		1 axis	E103 1		
		2 axis	2		
Voltage output					
Supply voltage 9-32VDC (*11,5-32VDC)					
Characteristic: 1= contra rotating, 2= concurrently rotating					
0,5...2,5...4,5V redundant per axis		1 axis	E111 1		
		2 axis	2		
Output power					
Supply voltage 9-32VDC					
Characteristic: 1= contra rotating, 2= concurrently rotating					
4...12...20mA redundant per axis		1 axis	E211 1		
		2 axis	2		
Special model					
X	Special / customer-specific				

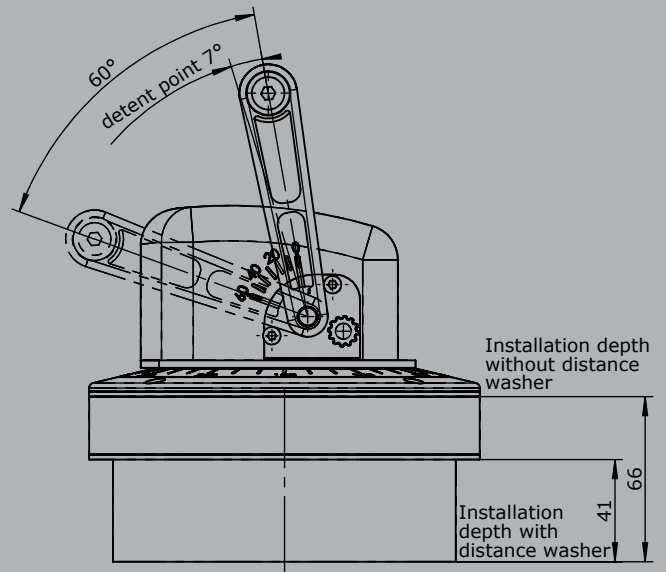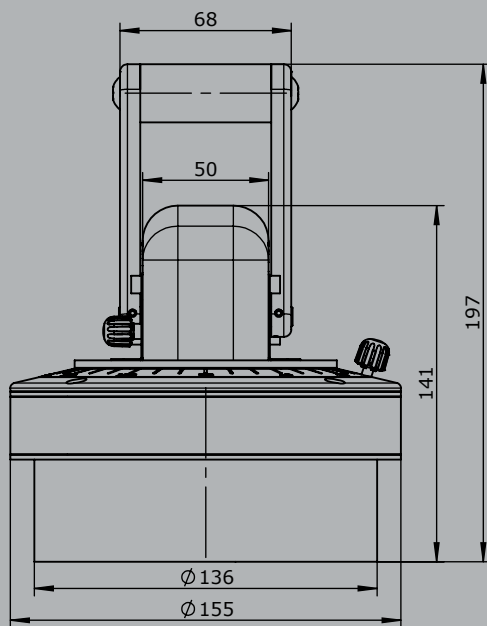

Edition:
with motor rossetting control system

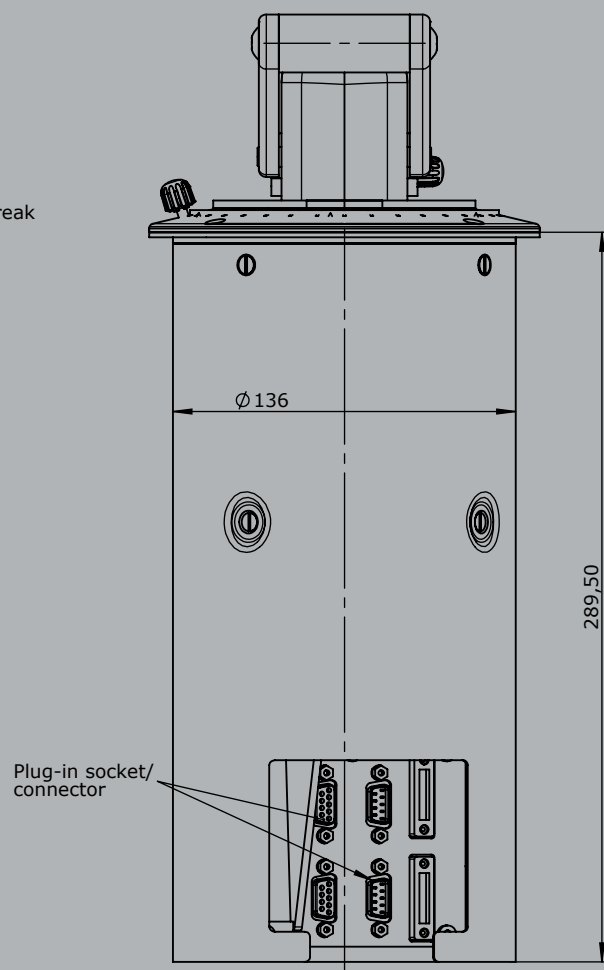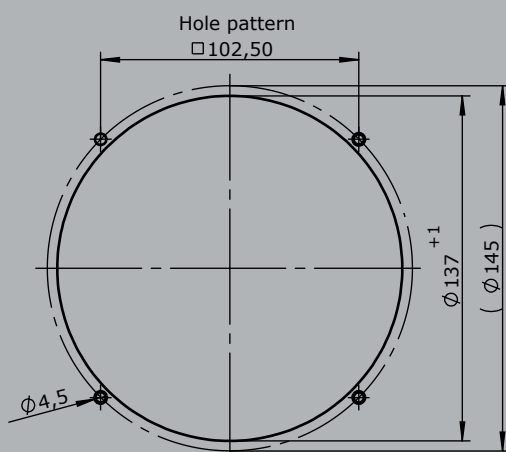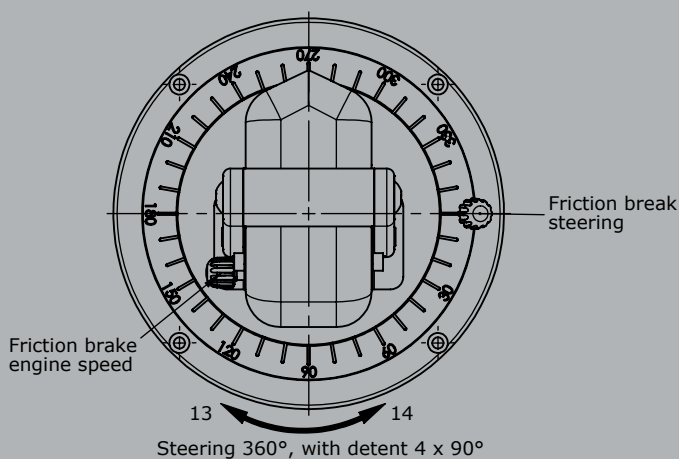

Pedal-controller

P7 / PP7

The pedal-controller P7 and PP7 is a rugged switching devices for footing applications. The pedal-controller is resistant to oil, maritime conditions e.g. offshore /vessels, UV radiation typically from the sun.



Technical data

mechanical life P7	6 million operating cycles
mechanical life PP7	10 million operating cycles
Operation temperature	-40°C til +60°C
Degree of protection P7	IP 54
Degree of protection PP7	IP 65
Colour	RAL 7032 pebble-grey



		P7	- 1 Z	Example P	- A01	P124	-X
Basic unit							
P7	Pedal-controller						
	reinforced version						
PP7	Pedal-controller						
Detent							
	without						
R1	0-2						
R2	0-3						
R3	0-4						
R4	1-0-1						
R5	2-0-2						
Direction 1-2							
1	1 contact	Standard contact - Arrangement see page 106					
2	2 contacts	z.B.					
3	3 contacts	MS 11	A01				
4	4 contacts*	MS 12	A02				
5	5 contacts*	MS 13	A03				
6	6 contacts*	MS 14	A04				
	*only possible without potentiometer!	MS 21	A05				
		A99 contact - arrangement according customer request					
Z	Spring return						
R	Friction brake						
(P)	Mounting options for potentiometer and encoder (Gessmann-types)						
P	Potentiometer	P121	T374	0,5 kOhm	I max. 1 mA		
		P122	T374	1 kOhm	I max. 1 mA		
		P123	T374	2 kOhm	I max. 1 mA		
		P124	T374	5 kOhm	I max. 1 mA		
		P125	T374	10 kOhm	I max. 1 mA		
		More potentiometer on demand!					
Special model							
X	Special / customer-specific						

Technical details may vary based on configuration or application! Technical data subject to change without notice!

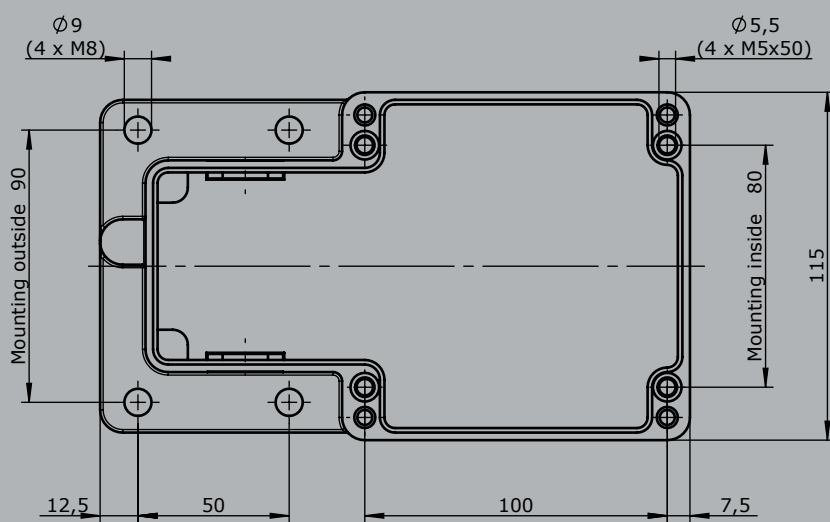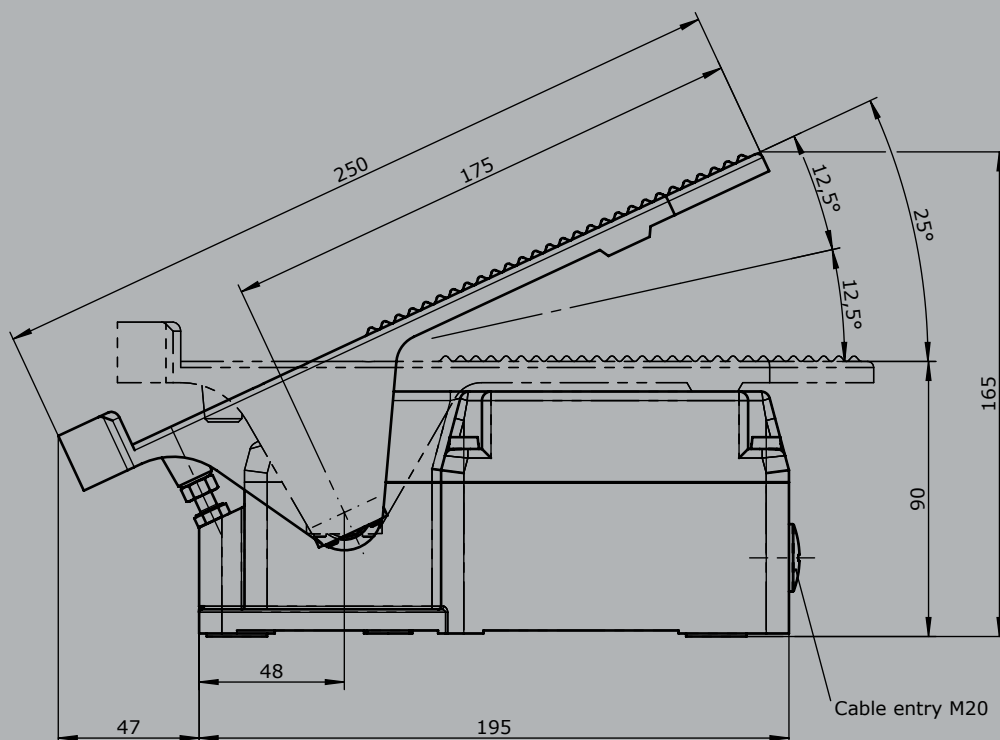

Pedal-controller

P8 / PP8



The pedal-controller P8 and PP8 is a rugged switching devices for footing applications. The pedal-controller is resistant to oil, maritime conditions e.g. offshore /vessels, UV radiation typically from the sun.

Technical data

mechanical life P8	6 million operating cycles
mechanical life PP8	10 million operating cycles
Operation temperature	-40°C til +60°C
Degree of protection P8	IP 54
Degree of protection PP8	IP 65
Colour	RAL 7032 pebble-grey



		P8	- 1 Z	Example P	- A01	P124	-X
Basic unit							
P8	Pedal-controller						
	Reinforced version						
PP8	Pedal-controller						
Detent							
	without						
R1	0-2						
R2	0-3						
R3	0-4						
Direction 1-2							
1	1 contact	Standard contact - Arrangement see page 106					
2	2 contacts	z.B.					
3	3 contacts	MS 11	A01				
4	4 contacts*	MS 12	A02				
5	5 contacts*	MS 13	A03				
6	6 contacts*	MS 14	A04				
	*only possible without potentiometer!	A99 contact - arrangement according customer request					
Z	Spring return						
R	Friction brake						
(P)	Mounting options for potentiometer and encoder (Gessmann-types)						
P	Potentiometer	P121	T374	0,5 kOhm	I max. 1 mA		
		P122	T374	1 kOhm	I max. 1 mA		
		P123	T374	2 kOhm	I max. 1 mA		
		P124	T374	5 kOhm	I max. 1 mA		
		P125	T374	10 kOhm	I max. 1 mA		
		More potentiometer on demand!					
Special model							
X	Special / customer-specific						

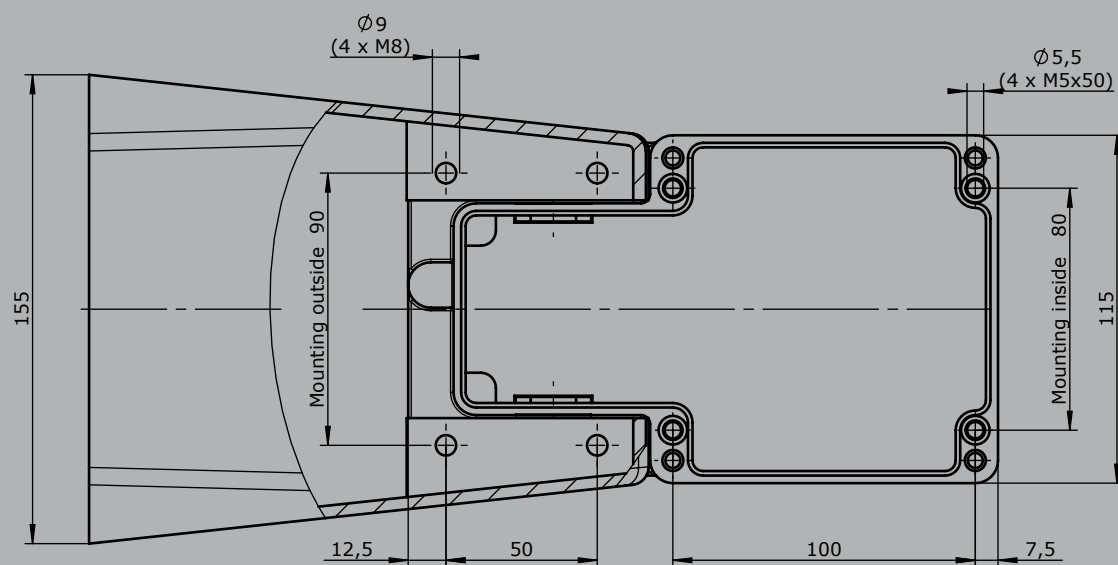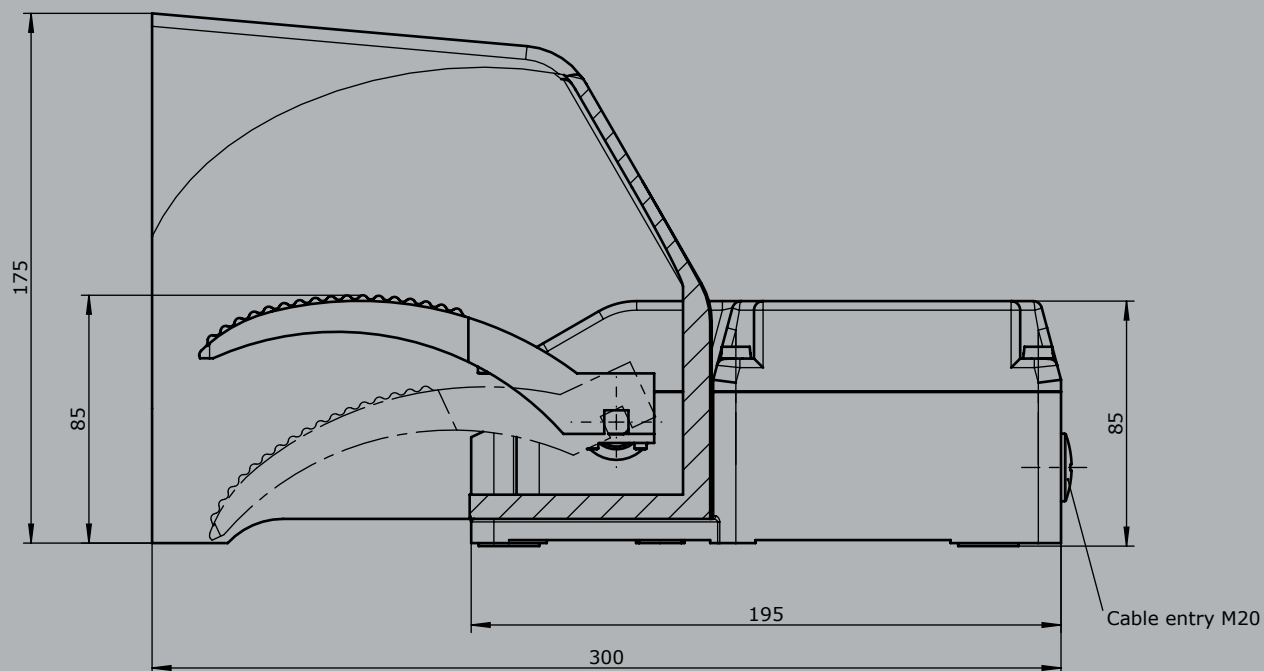

Pedal-controller P10/P11/P12



The pedal-controller P10/P11/P12 is a rugged switching device for electro-hydraulic. The modular design enables the switching device to be used universally. The P10/P11/P12 is resistant to oil, maritime, climate, ozone and UV radiation.




Technical data

Mechanical life P10	8 million operating cycles
Operation temperature	-40°C til +60°C
Degree of protection P10	IP 54





		P10	- 1 Z	P	- A01	P224	- B	- X
Basic unit								
P10	Pedal-controller, 0-30°							
P11	Pedal-controller, 15°-0-15°							
P12	Pedal-controller, 0-15°							
Detent								
	without							
R	with detent							
Direction 1-2								
1	1 contact	Standard contact - arrangement see page 106						
2	2 contacts	z.B.						
3	3 contacts	MS 11 A01 MS 12 A02 MS 13 A03 MS 21 A05 <i>A99 contact - arrangement according customer request</i>						
Z	Spring return							
R	Friction brake							
(P)	Possibility of mounting potentiometer (Gessmann-types)							
P	Potentiometer	P222	T362	1 kOhm	I max. 1 mA			
		P223	T362	2 kOhm	I max. 1 mA			
		P224	T362	5 kOhm	I max. 1 mA			
		<i>More potentiometer on request!</i>						
Cover housing								
B	Cover housing with cable entry M20							
Special model								
X	Special / customer-specific							

P10/P11

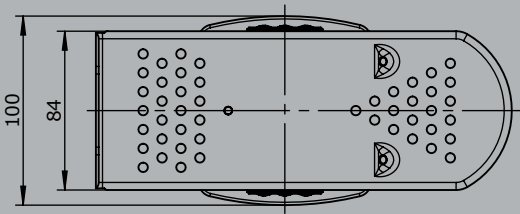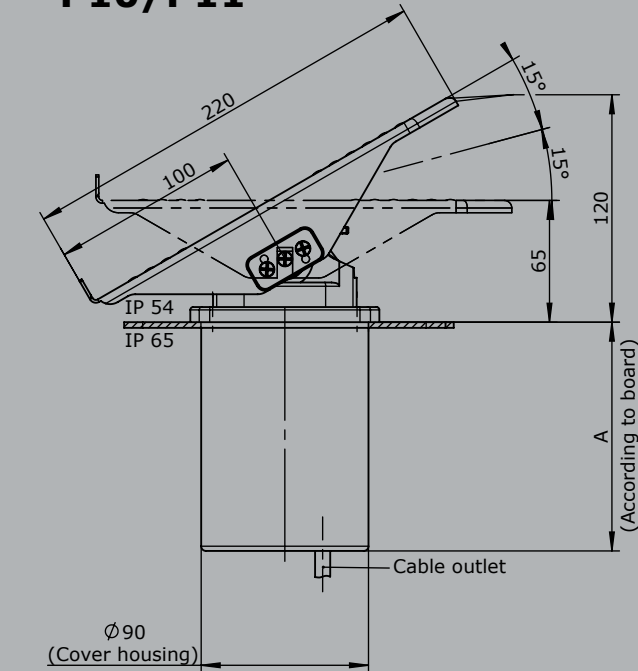

P12

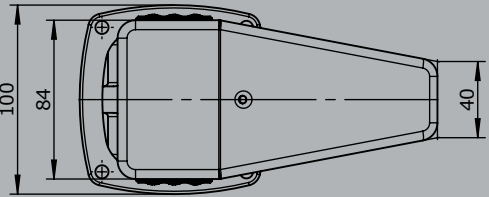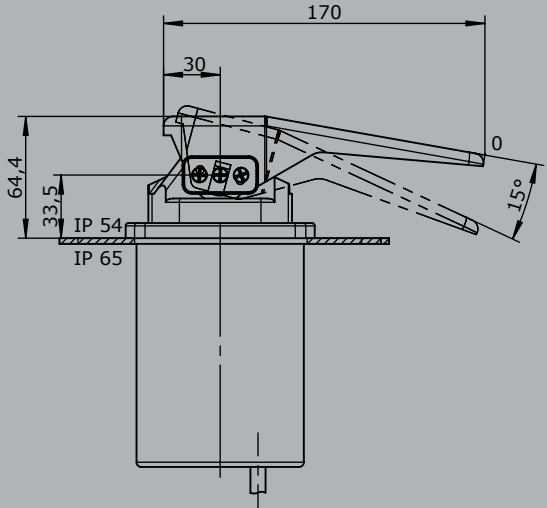

Gear limit switch
GE 1 / GE 2



The gear limit switch GE 1 / GE 2 is a rugged switching device designed for hoisting applications.
The modular micro changeover contacts with positive opening operation.
The device is programmed by means of stepless adjustment of double cam disks, which can be provided from 18° to 192° contact disks according to the switching program required.
The type GE 1 includes a double cam disk conjointly lockable.
The type GE 1 includes a double cam disk conjointly lockable.



Technical data

Table with 2 columns: Specification (Mechanical life, Operation temperature, Degree of protection, Colour) and Value (10 million operating cycles, -40°C til +60°C, IP 65, RAL 7032 pebble grey).

Example

Main configuration table with columns for GE 1, - 10, - 4, - P, and Example options (- U7, - P444, - 18, - 30, - 60, - 90, - X). Rows include Basic unit, Gearing, Limit switch, and Potentiometer details.

Technical details may vary based on configuration or application! Technical data subject to change without notice!


Gear limit switch

GE 1 / GE 2

GE 1 - 10 - 4 - P - U7 - P444 - 18 - 30 - 60 - 90 - X

Aluminium housing	
U5	U17/13 170x130 mm (max. 8 contacts GE 1)
U6	U16/16 160x160 mm (max. 12 contacts GE 1/ max. 6 contacts GE 2)
U7	U16/20 160x200 mm (max. 16 contacts GE 1/max. 10 v GE 2)
U8	U16/26 160x260 mm (max. 16 contacts GE2)
U9	U16/35 160x350 mm
Program-disk	
Following program-disks are available :	
18°, 24°, 30°, 36°, 45°, 60°, 75°, 90°, 110°, 120°, 176°, 192°	
Example:	
Contact 1: program-disks pair 18° (adjustment range 18°-36°)	
Contact 2: program-disks pair 30° (adjustment range 30°-60°)	
Contact 3: program-disks pair 60° (adjustment range 60°-120°)	
Contact 4: program-disks pair 90° (adjustment range 90°-180°)	
Contact n:	
Illustration	
The programm-disks are infinitely adjustable within 360°	
Special model	
X	Special / customer specific

Gear limit switch
GE 1 / GE 2

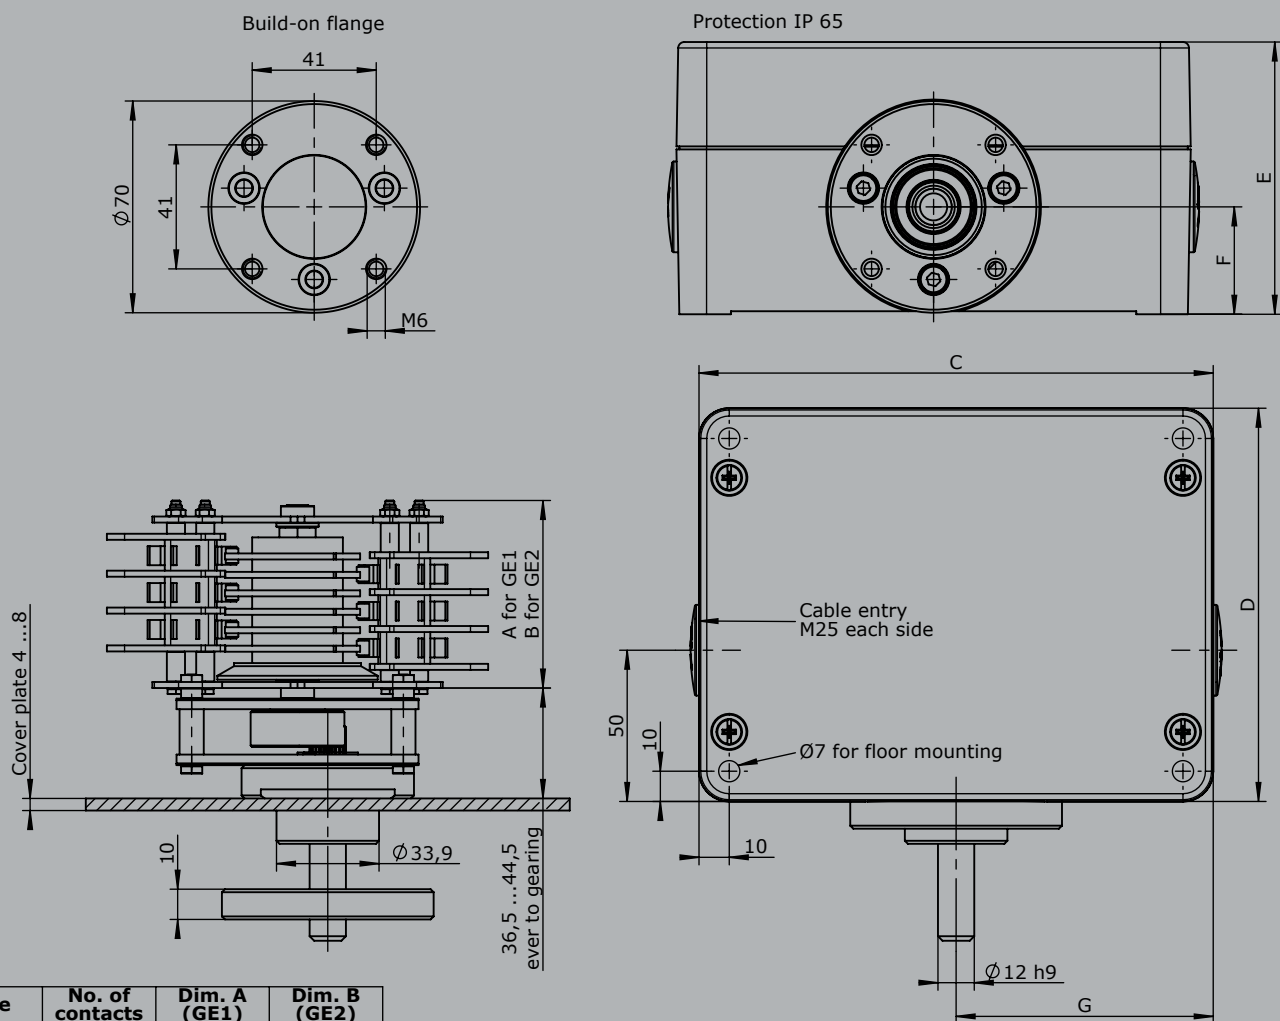

Type	No. of contacts	Dim. A (GE1)	Dim. B (GE2)
1	1	32	35,5
2	2	38,5	42
3	3	44,5	48
4	4	50,5	54
5	5	56,5	60
6	6	63	66,5
7	7	69	72,5
8	8	75	78,5
9	9	81	84,5
10	10	87	90,5
11	11	93	96,5
12	12	99	102,5
13	13	105,5	109
14	14	111,5	115
15	15	117,5	121
16	16	123,5	127

Type	Dim. C	Dim. D	Dim. E	Dim. F	Dim. G
U17/13	170	130	90	35,5	75
U16/16	160	160	91	45	70
U16/20	160	200	100	45	70
U16/26	160	260	91	45	70
U16/35	160	350	100	45	70

Technical details may vary based on configuration or application! Technical data subject to change without notice!

DC-Contact SO 1.10 Normally closed (NC) SS 1.10 Normally open (NO)

The DC contact block is used for signalling and announcement applications. The snap-action mechanism prevents slow contact opening when the plunger is operated slowly. Quenching of the arc that occurs with DC is supported by two-capacity permanent magnets.

These are arranged so that the polarity can be ignored when connecting +/- cabling. However, the polarity of the quenching magnets must be noted when installing the contact blocks to prevent the magnets adversely affecting each other. Contact blocks in four different colours are available for polarity identification of the magnets when fitted.

The contact blocks may only be installed on non-magnetizable materials with screw, etc. made of non-ferrous metal.

The self-cleaning silver contacts are designed for low switching frequency, low currents and voltages. Gold coated contacts can be supplied (approx 0,2µ), less than 42 Volt required. The screw connection M3.5 at the side is suitable for 2 conductors max. 2,5mm². The plug-in connection at the top 4.8 x 0.8 mm DIN 46247.

Several contact blocks can be plugged on the top of each other and operated jointly. The plug-type terminals are then only accessible on the top unit. The contact blocks can be provided with shock protection to DIN VDE 0106 Part 100.



Example

	Switching capacity		Time constant
	NC	NO	
250 V DC	2 A	1 A	20 ms
125 V DC	4 A	3 A	20 ms
50 V DC	6 A	6 A	20 ms
30 V DC	10 A	10 A	20 ms
250V AC 15	6 A	6 A	

Technical data

Mechanical life	2 million operating cycles
Electrical service life	50.000 operating cycles (at 2A 250VDC L/R 20 ms)
Operation temperature	-40°C til +60°C
Degree of protection	IP 40


	SO 1.10	- B	- R	- F	- X
Basic unit					
SO1.10	DC-contact normally closed (NC)				
	Colour code grey or blue				
SS1.10	DC-contact normally open (NO)				
	Colour code yellow or green				
Attachment					
B	Shock protection KEG 142 to DIN VDE 0106 part 100				
R	Roller lever				
K	Toggle lever (switching is one direction only)				
F	Plug-in connection at side 4,8 x 0,8 mm (2 pieces)				
AU	Contacts gold-coated approx. 0,5				
Special model					
X	Special / customer specific				
X1	Contact without quenching magnets				

Technical details may vary based on configuration or application! Technical data subject to change without notice!


DC-Contact

SO 1.10 Normally closed (NC)


SS 1.10 Normally open (NO)

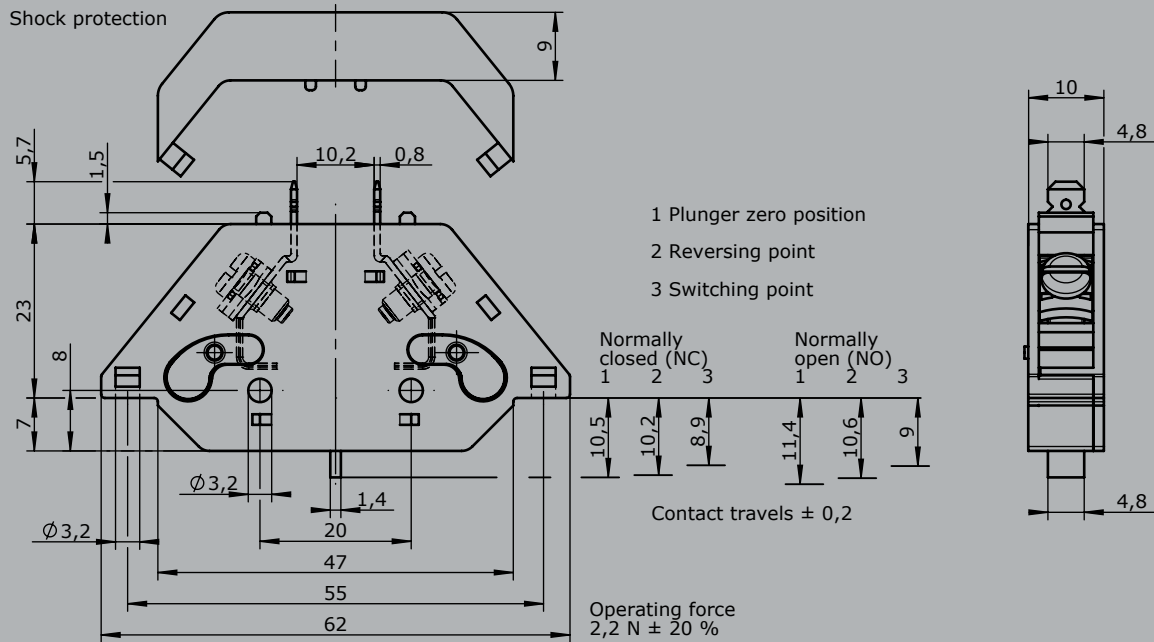

with roller lever

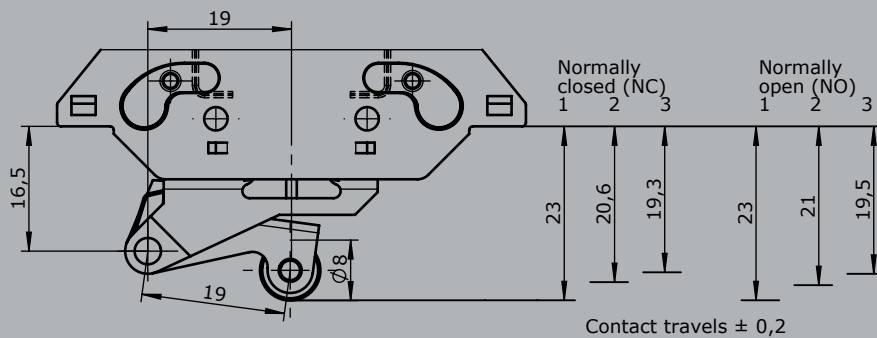

with toggle lever

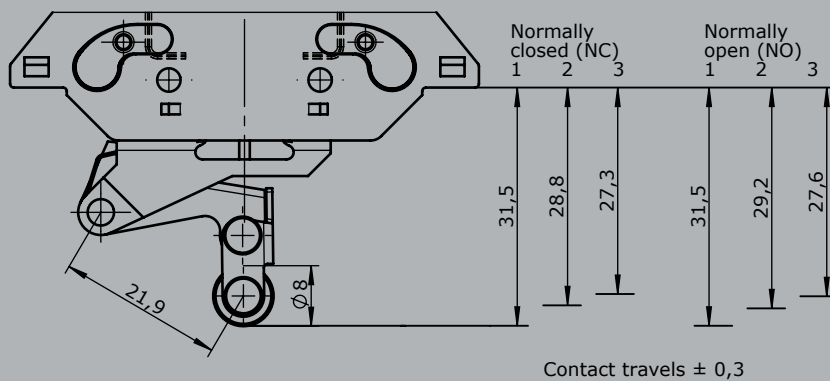

Signal-cam controller NU 1

The cam controller NU 1 is used as a signal and annunciation switch in HV systems. This rugged switching device has cam disks made of insulation material that can be set at 10° intervals. The DC contact blocks are designed to permit series assembly, which can be operated simultaneously.

Technical data

Mechanical life NU1	2 million operating cycles
Operation temperature	-40°C til +60°C
Degree of protection	IP 40 / IP 65 with aluminium housing




Switching capacity	NC	NO	Time constant
250V DC	2A	1A	20 ms
125V DC	4A	3A	20 ms
50V DC	6A	6A	20 ms
30V DC	10A	10A	20 ms
250V DC15	6A	6A	

	NU1	- 4	- 4	- F2	Example - Z	- W	- A		- X
Basic unit									
NU 1 Signal-cam controller									
Contacts (1. range)									
2 2 contacts									
4 4 contacts									
6 6 contacts									
8 8 contacts									
10 10 contacts									
12 12 contacts									
14 14 contacts									
16 16 contacts									
Contacts (2. range)									
2 2 contacts									
4 4 contacts									
6 6 contacts									
8 8 contacts									
10 10 contacts									
12 12 contacts									
14 14 contacts									
16 16 contacts									

Technical details may vary based on configuration or application! Technical data subject to change without notice!

	NU1	- 4	- 4	- F2	- Z	- W	- A		- X
Option									
F1	1 free shaftend with hexagonal 12 mm								
F2	2 free shaftend diameter 12 mm								
F3	2 free shaftend with hexagonal 12 mm								
Z	Spring return								
W	Mounting angles (2 pieces)								
GH	Link lever								
A	Cover housing off Astralon								
	til installation size 4 contacts								
	til installation size 4 contacts								
	til installation size 4 contacts								
	til installation size 4 contacts								
B	Shock protection KEG 142 for single contact								
Aluminium housing									
U11	U23/20 232x202 mm (max. 10 contacts)								
U12	U23/28 232x280 mm (max. 16 contacts)								
<i>Housing only possible with single-row version contacts</i>									
Special model									
X	Special / customer-specific								

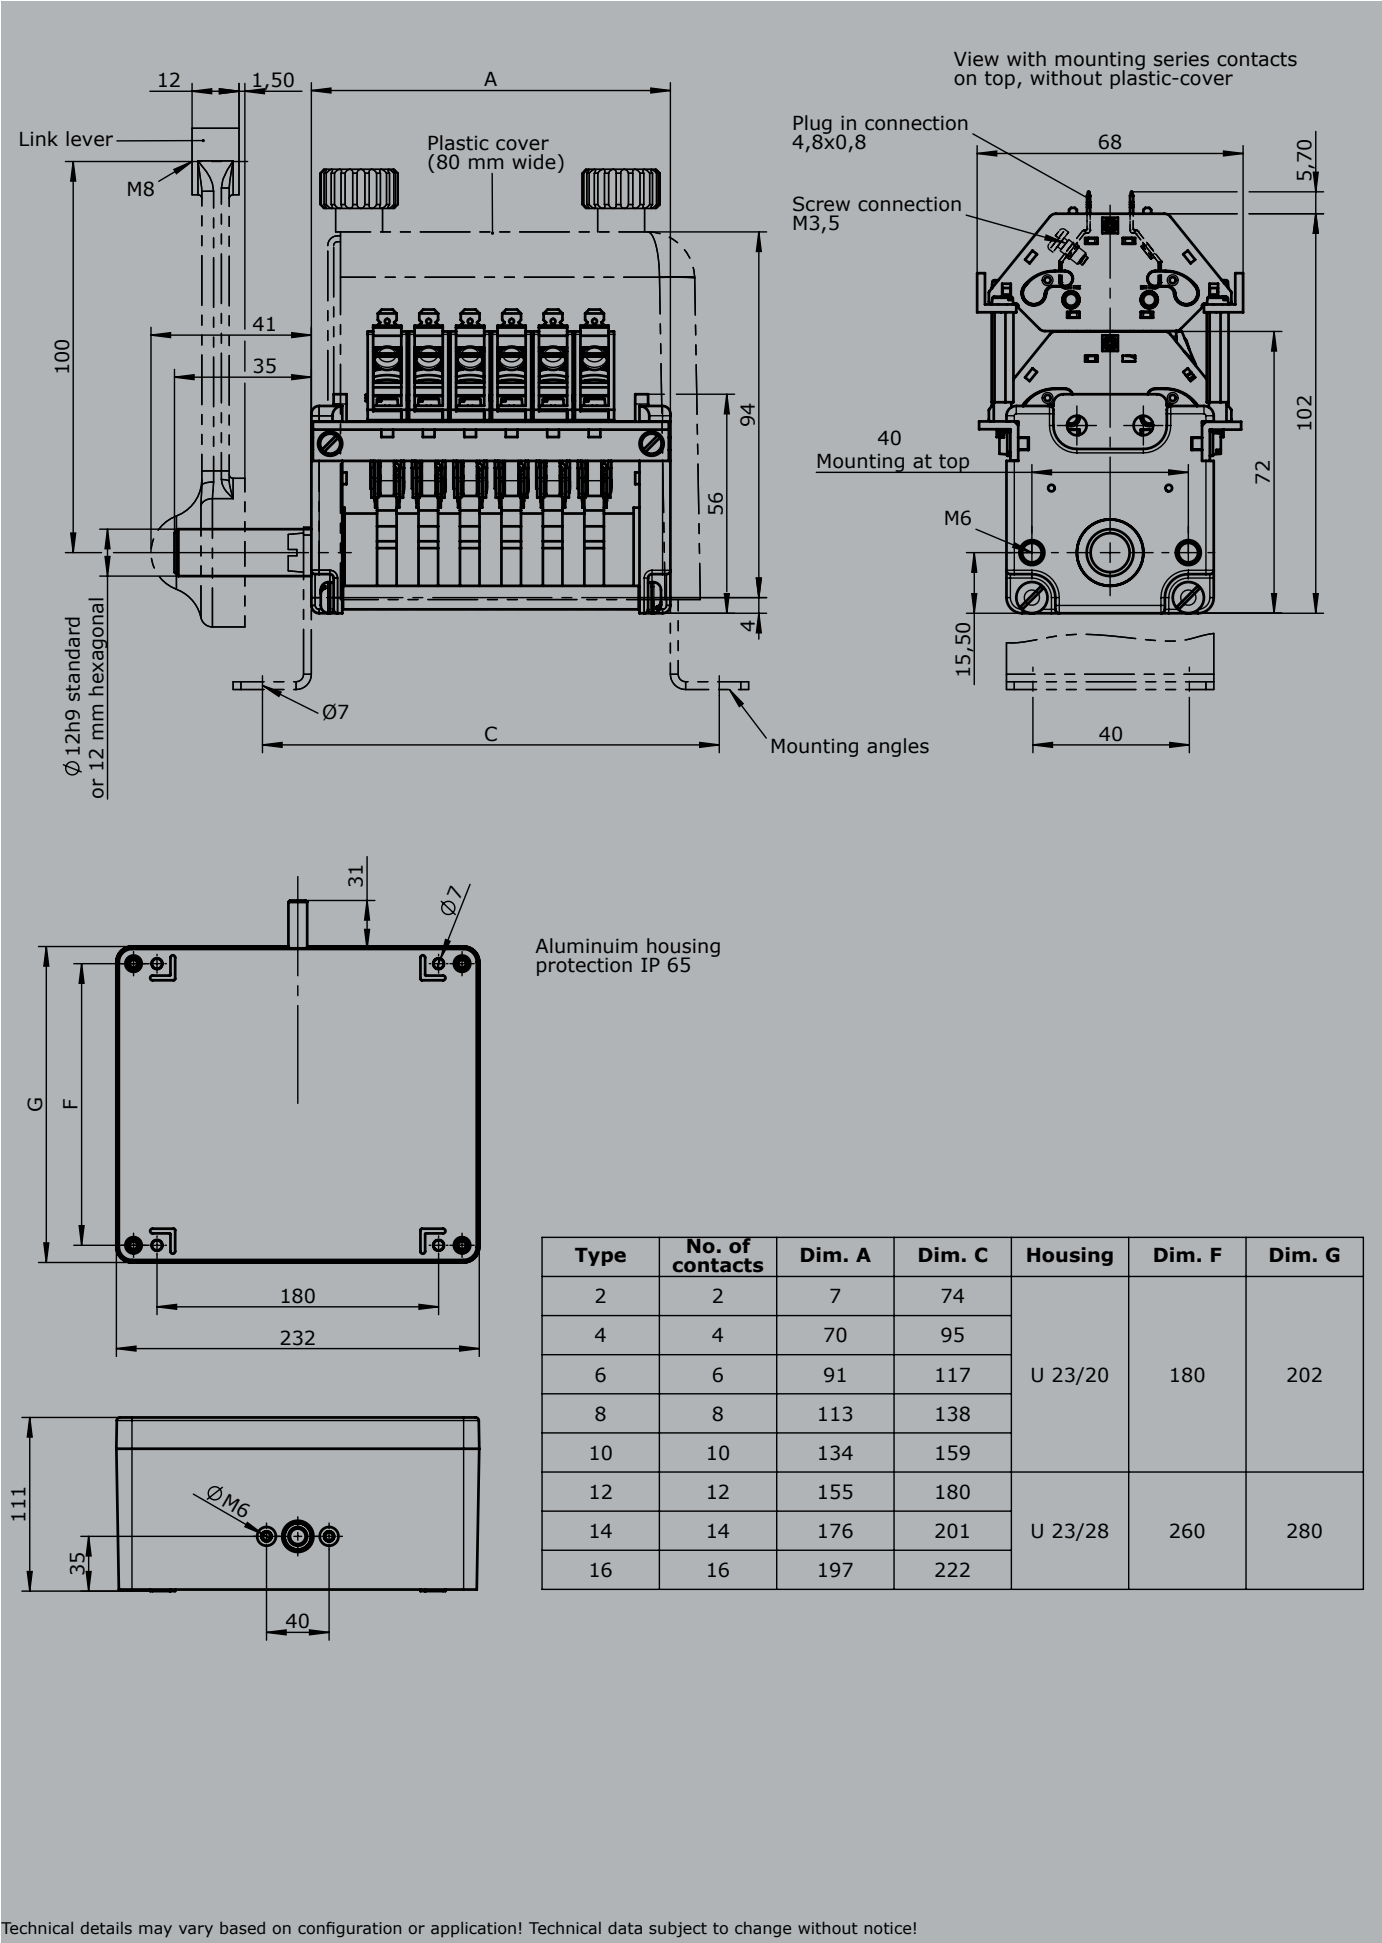

Headquarters and locations of Gessmann Group



Headquarters

W. Gessmann GmbH
Postfach 11 51
74207 Leingarten
Eppinger Straße 221
74211 Leingarten
Phone +49 7131 40 67-0
Fax +49 7131 40 67-10
gessmann@gessmann.com
www.gessmann.com



Gessmann Group

Sales office France

Bureau Gessmann France
Nicolas Patricot
Chateaufort
Phone +33 65 20 74 55 9
Fax +33 989 264 847
nicolas.patricot@gessmann.com
www.gessmann.com

Sales office Scandinavia

Gessmann Office Finland
Harri Järvenpää
Vuorikatu 30 A
23500 Uusikaupunki
Phone + 358 408 2800 10
harri.jarvenpaa@gessmann.com

Responsible for:

Finnland
Norwegen
Schweden

Subsidiary North America, Mexico, Chile, Canada

SENETT Control Co. Ltd.
Gessmann Group
225 Admiral BLVD.
Mississauga Ontario L5T2T3
Phone +1 905 564 0167
Fax +1 905 564 6633
sales@senett.ca
www.senett.ca

Responsible for:

USA
Mexico
Chile
Canada

Subsidiary Asia

Gessmann China Ltd.
No. 183, Lane 456,
Dieqiao road,
Shanghai 201315.
Phone +86 21 5011 3466
Fax +86 21 5186 1266
sales@gessmann.com.cn
www.gessmann.com

Responsible for:

China

Gessmann Partner

Brazil
Choice Tecnologia Ind.e Com.de
equipamentos industrial Ltda
Rua Afonso Fruet, 131, Fazendinha
81320-020 Curitiba / PR
Phone +55 41 3015 7953
Fax +55 41 3015 7853
contato@choicetech.com.br
www.choicetech.com.br

USA

OEM Controls, inc.
10 Controls Drive
Shelton, Conn. 06484
Phone +1 203 929 84 31
Fax +1 203 926 69 24
ksimons@oemcontrols.com
www.oemcontrols.com

Representatives in Germany

**I.K.F. Ingenieur- und
Vertriebsges.mBH**
An der Strusbek 8 D
22926 Ahrensburg
Phone +49 4102 21 13-0
Fax +49 4102 21 13-10
info@ikfgmbh.de
www.ikfgmbh.de

Bretzel GmbH

Postfach 64 331, 64331 Weiterstadt
Am Rotböhl 8, 64331 Weiterstadt
Phone +49 0615 086 56 00
Fax +49 0615 086 56 069
info@bretzel-gmbh.de
www.bretzel-gmbh.de

Christiani Elektro-Vertriebs-GmbH

Innungstraße 39
50354 Hürth
Phone +49 2233 3 50 35
Fax +49 2233 3 61 81
vertrieb@christiani-gmbh.de
www.christiani-gmbh.de

**Dr.-Ing. Klaus Zimmermann
Ingenieurbüro**
Hauptstraße 158
06493 Harzgerode OT Neudorf
Phone +49 39484 63 64
Fax +49 39484 63 19
ib-zimmermann@gmx.de
www.gessmann.com

Systemautomation Zimmermann

Dipl.-Ing. Jan Zimmermann
Hauptstraße 158
06493 Harzgerode OT Neudorf
Phone +49 39484 74 24 84
Fax +49 39484 63 19
saz-zimmermann@gmx.de
www.gessmann.com

Dealer network worldwide



Argentina

Cavotec Latin America S.A.
calle Bogotá 1362
B1640DDL Martínez
Buenos Aires
Phone +54 11 4836 2726
Fax +54 11 4836 2116
info.ar@cavotec.com
www.cavotec.com

Australia

Cavotec Australia Pty Ltd.
Head Office Newcastle
P.O. Box 577
28 Mitchell Road, Cardiff NSW 2285
Phone +61 2 4956 5788
Fax +61 2 4956 5823
phillip.macridis@cavotec.com
www.cavotec.com

Belgium

Batenburg Mechatronica B.V.
Leuvensesteenweg 613
1930 Zaventem zuid 7
Phone +32 225 33 120
Fax +32 225 30 897
info@batenburgbelgie.be
www.batenburg-mechatronica.com

Chile

Sistemas de Control Ltda.
La Cordillera 21
Lampa-Santiago
Phone +562 295 27966
alorca@io.cl
www.io.cl

China

Cavotec (Shanghai) Power Supply and
Crane Technology Co., Ltd.
Unit 11, No. 1951, Duhui Road
Minhang District
Shanghai 201108
Phone +86 21 5442 9778
Fax +86 21 3407 3498
info.cn@cavotec.com
www.cavotec.com

Czech Republic

RIA power s.r.o.
Míru 3
739 61 Trinec-Kanada
Phone +420 553038848
Fax +420 558 988815
riapower@riapower.cz
www.riapower.cz

Denmark

Baastrop A/S
Dronning Olgas Vej 30
2000 Frederiksberg
Phone +45 38 10 21 29
Fax +45 38 10 29 69
info@baastrop.com
www.baastrop.com

Finland

Kentek Oy
Postbox 18, 01721 Vantaa
Tiilenlyöjankuja 4, 01720 Vantaa
Phone +358 9 849 420 0
Fax +358 9 849 420 59
kentek@kentek.fi
www.kentek.fi

Greece

Euroelektrik
Stefanidou Kalliopi & Co.
Handelsgesellschaft
P.O. Box 203
50100 Kozani
Phone +30 30 2 46 10 9 44 45
Fax +30 30 2 46 10 9 44 25
kastefa@otenet.gr

Hong Kong

Cavotec Hong Kong Ltd.
Units 1101-2A, 11/F, Golden Centre
188 Des Voeux Road Central,
Hong Kong
Phone +852 2791 6161
Fax +852 2791 1834
info.hk@cavotec.com
www.cavotec.com

India

Arihant Elsys Private Limited
24/4866 Ansari Road Darya Ganj
New Delhi - 110002
Phone +91 11 23 26 90 11
Fax +91 11 23 27 35 54
info@arihantelectricals.com
www.arihantelectricals.com

Iran

Lebon Company
83, NO.9, Brand Center bldg.
Shahid Lavasani (Farmanieh) Str.
Tehran 1954664598
Phone +98 21 2614 0496
Fax +98 21 2613 0981
lebon@lebonco.com

Italy

S.P.I.I. Società per Azioni
Via Don Volpi 37, 21047 Saronno VA
Phone +39 02 9 62 29 21
Fax +39 02 9 60 96 11
info@spii.it
www.spii.it

Japan

JEPICO Corporation
Shinjuku Front Tower
21-1 Kita Shinjuku 2-Chome
Shinjuku-ku, Tokyo 169-0074
Phone +81 3 6362 0316
Fax +81 3 5386 8235
a_oeiki@jepico.co.jp
http://www.jepico.co.jp/

Office Niya
Myoujin 3-13-10
636-0022 Ohji-Cho, Kitakatsuragi-Gun,
Nara Pref.
Phone +81 80 5427 6046
h.niia@krc.biglobe.ne.jp

Korea

Roritec Co. Ltd.
460-1 Hyomun-Dong
Buk-Ku 683-360 Ulsan
Phone +82 52 288 7114
Fax +82 52 288 7124
keonju@roritec.co.kr
www.roritec.co.kr

Malaysia

PINTSCH-BUBENZER MYPOR SDN BHD
No. 22, Jalan Mega 1/4
Taman Perindustrian Nusa Cemerlang,
81550 Gelang Patah,
Johor Darul Takzim
Phone +607 5319 799
Fax +607 5319 798
info@pbmyport.com.my
www.my-port.net

Mexico

Alimentaciones Electricas, S.A. de C.V.
Parque Industrial Empresarial
Cuautlancingo
Rio Suchiate No. 24
CP 72730 Cuautlancingo, PUE
Phone +52 222 210 50 93
Fax +52 222 210 50 69
almesa@mexis.com.mx
www.almesa.com.mx

Netherlands

Batenburg Mechatronica B.V.
P.O. Box 9393, 3007AJ Rotterdam
Stolwijkstraat 33, 3079 DN Rotterdam
Phone +31 10 2 92 87 87
Fax +31 10 2 92 87 65
info.mechatronica@batenburg.nl
www.batenburg-mechatronica.com

Norway

Cavotec Norge, AS
Strandveien 6
3050 Mjøndalen
Postbox 276, 3051 Mjøndalen
Phone +47 32 27 43 00
Fax +47 32 23 00 77
info@cavotec.no
www.cavotec.com

Poland

ELEKTRO-TRADING
ul.P.Gojawczynskiej 13
44-109 Gliwice, Poland
Phone +48 32 330 45 70
Fax +48 32 330 45 74
et@elektro-trading.com.pl
www.elektro-trading.com.pl

Romania

ELECTRO-DISTRIBUTION S.R.L.
Str. mecet nr. 42-44, sector 2
Bucuresti
Phone +40 21 253 29 55
Fax +40 21 253 29 56
anca.mohonea@electrodistribution.ro
www.electrodistribution.ro

Russia

EIM engineering Ltd.
Trefoleva str. 1, liter.P
198097 Sankt-Petersburg
(Kasachstan)
Phone +7 965 038 89 66
info@eim-engineering.ru

Smart Automatica JSC
Belinski str 83, office 416
620026 Jekaterinburg
Phone +7 343 344 34 21
inf@smartautomatica.ru

Trader Group Ltd.
Himicheskyi narrow str. 1, liter.P
198095 Sankt-Petersburg
Phone +7 812 3259 365
tradergroup@gmail.com

Serbia

Bosnia-Herzegovina

Kosovo

Macedonia

Montenegro

Elektro UMI d.o.o.
Milene Cupic 11
11250 Zeleznik
Phone +381 11 2576 206
Fax +381 11 2577 364
office@elektroumi.rs
www.elektroumi.rs

Singapore

Cavotec Singapore PTE Ltd.
30 Toh Guan Road #07-02
Singapore 608840
Phone +65 6862 2545
Fax +65 6862 2548
info.sg@cavotec.com
www.cavotec.com

Slovakia

VENIO, s.r.o.
Karmínová 1092/3
01003 Zilina
Phone +421 949 130 270
venio@venio.sk
www.venio.sk

South Africa

Powermite
A division of Hudaco Trading (PTY) Ltd.
92, Main Reef Road
1724 Roodepoort
Phone +27 11 271 0000
Fax +27 11 760 3099
powermite.jhb@global.co.za
www.powermite.co.za

Spain

Kimatic S.L.
Calle Alluitz, 6-1°C
48200 Durango (Bizkaia)
Phone +34 946 20 10 36
Fax +34 946 20 8 32
info@kimatic.es
www.kimatic.es

Sweden

Kiepe Elektriska AB
Lodgatan 4, 21124 Malmö
Phone +46 40 29 15 55
Fax +46 40 29 12 31
kiepe@kiepe.se
www.kiepe.se

Switzerland

ELVA AG – Elektrische Verteilanlagen
Werbholtenstrasse 54
4143 Dornach
Phone +41 61 706 85 95
Fax +41 61 706 85 91
info@elva.ch
www.elva.ch

Thailand

Philippines

Vietnam

MTI Engineering CO., LTD
94/20, moo 3, Soi-Janthongaium
Bangrakpattana, Bangbaothong
Nonthaburi 11110
Phone +662 02 1902050 53
Fax +662 02 19020 54
info@mti-eng.com
www.mti-eng.com

Turkey

ARDA Makina Elektrik
Ticaret ve Sanayi Ltd. Sti.
100. Yıl Bulvarı 1230. Street No.1
06374 Ostim-Ankara
Phone +90 312 385 80 37
Fax +90 312 385 80 58
arda@ardaelektrik.com
www.ardaelektrik.com

Ukraine

Ukrgeoavtomatika, Ltd.
Str. Okjabrskoj revoluziji, 93
61004 Charkov
Phone +38 057 758 8999
Fax +38 057 759 0732
market@geonorma.com.ua
www.geonorma.prom.ua

United Arab Emirates

Cavotec Middle East FZE
P.O. Box 61 124
Jebel Ali Free Zone, AA2 & AA3-RA08
Dubai
Phone +971 488 38 350
Fax +971 488 38 352
rajiv.kollaikal@cavotec.com
www.cavotec.com

United Kingdom

Cavotec UK Limited
Unit 5/6 St. Anne's Industrial Estate
Limeoak Way
Stockton-on-Tees, TS18 2LS
Phone +44 1624 608 245
Fax +44 1624 608 224
sales@cavotec.com.uk
www.cavotec.com

United States

Cavotec USA Inc.
333 Oates Road
Mooresville, NC 28117
Phone +1 704 873 3009
Fax +1 704 873 3093
kevin.stanford@cavotec.com
www.cavotec.com

Notes

[illegible]




Notes

[illegible]

Notes

[illegible]

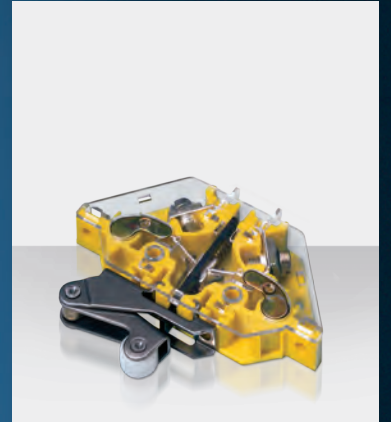

www.gessmann.com

W. Gessmann GmbH

P/O Box 11 51

74207 Leingarten

GERMANY

Eppinger Straße 221

74211 Leingarten

GERMANY

Phone +49 (0) 7131 40 67-0

Fax +49 (0) 7131 40 67-10

gessmann@gessmann.com

www.gessmann.com