

REF. NO: MPCL DWG A-50F-B14

REVISION

C.O.N	SYM	DESCRIPTION	DATE	DRAWN	APPR'D

GENERAL:

MODEL LP-50F-1 IS A 50 mm STROKE CONDUCTIVE PLASTIC, BUSHING MOUNT LINEAR POTENTIOMETER OF WHICH PERFORMANCE IS UNAFFECTED BY SHAFT ROTATION. ITS COMOLD ELEMENT AND PRECISION CONSTRUCTION ALLOW THE UNIT TO FEATURE LOW TORQUE, SUPERB SMOOTHNESS AND LONG LIFE.

ELECTRICAL SPECIFICATIONS:

ELECTRICAL STROKE: 50 mm (F.S.)
 TOTAL RESISTANCE: 5 KOHMS (1, 2, 10 KOHMS AVAILABLE)
 TOTAL RESIS. TOLERANCE: ±20%
 LINEARITY (INDEPENDENT): ±0.5% (±0.2% AVAILABLE)
 REPEATABILITY: ±0.005%
 POWER RATING: 1.5 WATTS @70°C
 INSULATION RESISTANCE: 100 meg OHMS MIN. @500 Vdc
 DIELECTRIC STRENGTH: 500 Vrms, 50/60Hz, for 1 MINUTE
 RESISTANCE TEMP. COEFFICIENT: 400 ppm/°C

MECHANICAL SPECIFICATIONS:

MECHANICAL STROKE: 56 mm (REF.)
 FRICTION: 50 gf (1.8 oz)
 WEIGHT: 75 g (2.7 oz)

ENVIRONMENTAL SPECIFICATIONS:

OPERATING TEMPERATURE: -40°C to +100°C
 VIBRATION: 10 Gs, 500 Hz
 SHOCK: 50 Gs, 11 mS
 LIFE: 5 MILLION CYCLES MIN.

HARDWARE:

TWO NUTS (M12) FOR MOUNTING AND TWO NUTS (M5) AND A WASHER AT THE SHAFT END ARE SUPPLIED WITH EACH UNIT.

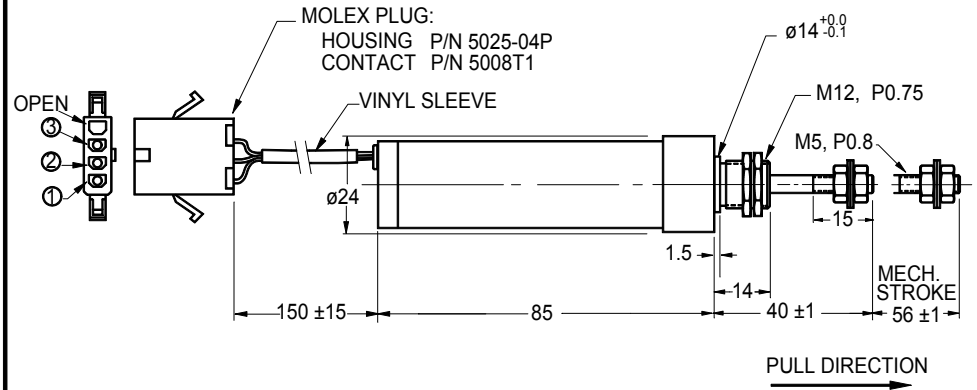


FIGURE 1 OUTLINE DIMENSIONS

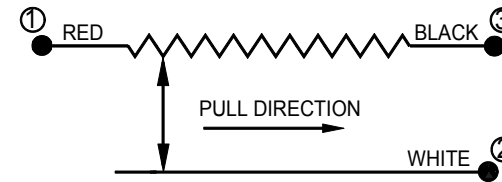


FIGURE 2 SCHEMATIC

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN mm(in).
 TOLERANCES:
 ANGLES ±1.5°
 ≤10 mm: ±0.25
 <100 mm: ±0.5
 ≥100 mm: ±1

DRAWN T.TSUGAWA	DATE 10/28/98
CHECKED	DATE
APPROVED	DATE
APPROVED	DATE
SCALE: NONE	

SPECIFICATION DWG
 FOR
MODEL LP-50F-1
 LINEAR MOTION
 POTENTIOMETER

Midori America Corporation
 FULLERTON, CA

B-MAC-B27

1 OF 1