

## Przełącznik HDTV 4 port



**Przełącznik 4-portowy HDTV Audio/Video.** Umożliwia podłączenie do telewizora lub zestawu kina domowego czterech źródeł sygnału (np. tuner TV sat, konsola do gier, odtwarzacz DVD, kamera cyfrowa...itp) i łatwe przełączanie się pomiędzy nimi.

### Cechy:

- Obsługa urządzeń generujących obraz i dźwięk wysokiej jakości (Hi-Def) poprzez złącze YPbPr.
- Przełączanie za pomocą pilota lub na panelu czołowym przełącznika
- Szerokość pasma wideo - 250MHz
- Obsługa toru audio - stereo
- Łatwa instalacja
- Dołączony zewnętrzny zasilacz


**Widok z przodu:**



**Widok z tyłu:**



**Diagram:**

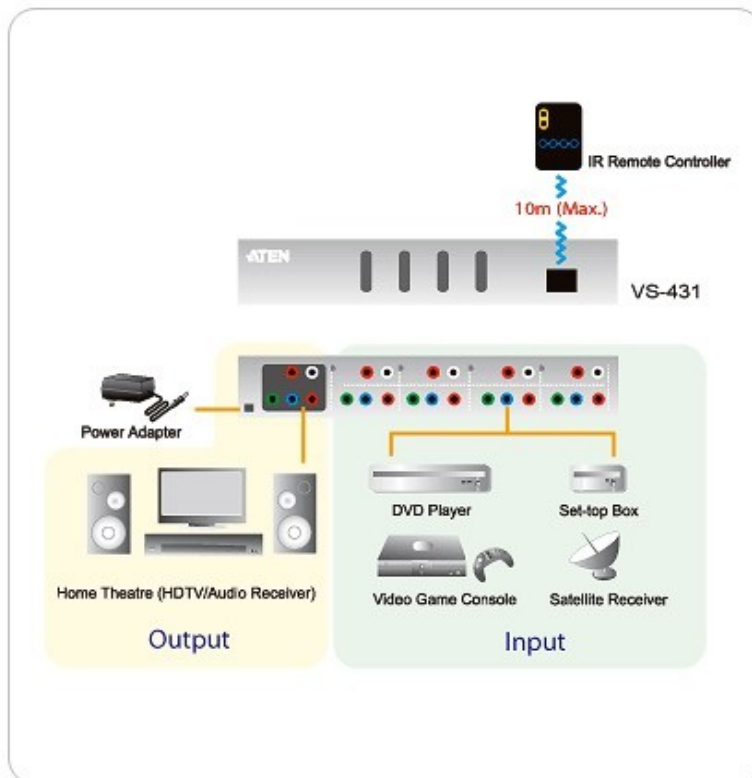

## Specyfikacja:

Connections		4		
Port Selection		Front panel switches, IR remote controller		
Connectors	Input	Video	Y	4 x RCA Female (Green)
			Pb	4 x RCA Female (Blue)
			Pr	4 x RCA Female (Red)
		Audio	L	2 x RCA Female (White)
			R	2 x RCA Female (Red)
		Output	Video	Y
	Pb			1 x RCA Female (Blue)
	Pr			1 x RCA Female (Red)
	Audio		L	1 x RCA Female (White)
			R	1 x RCA Female (Red)
	Power		1 x DC Jack	
	LEDs	Online		4 (Orange)
Selected		4 (Green)		
Buttons	Port Selection		4	
Power Consumption		DC 5.3V, 0.8W		
Video		1600 x 1200 @ 60Hz; DDC2B and 480p, 720p, 1080i, 1080p		
Video Bandwidth		250MHz		
Environment	Operating Temperature		0 ~50° C	
	Storage Temperature		-20 ~ 60° C	
	Humidity		0 - 80% RH, Non-condensing	